

FRONT ELEVATION
WEST

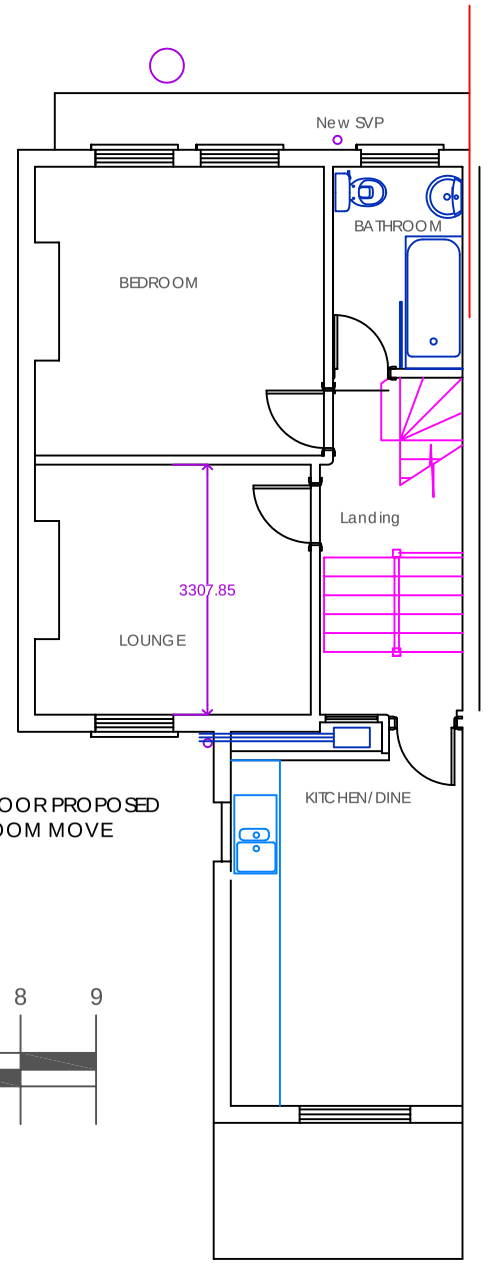

FIRST FLOOR PROPOSED
BATHROOM MOVE

Diagonal purlin supports removed.
New vertical supports fitted at 750mm centres on to a 150mm x 50mm floor plate. New joists under plate solid packed in all voids. Vertical members enclosed with plasterboard and doors fitted to allow access for roof space storage.

Side wall of dormer in 150mm x 47mm treated studs strength C16 @ 400mm centres tightly insulated. Vapour barrier internally polythene 1000 guage. Studs secured to chimney brickwork for rigidity. (flues unused).

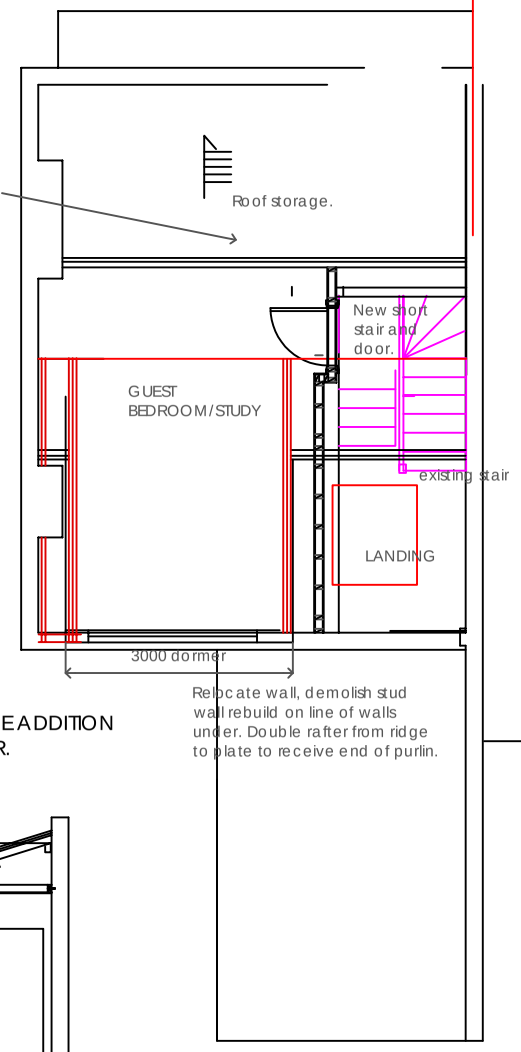

ROOF SPACE ADDITION
OF DORMER.

Relocate wall, demolish stud wall rebuild on line of walls under. Double rafter from ridge to plate to receive end of purlin.

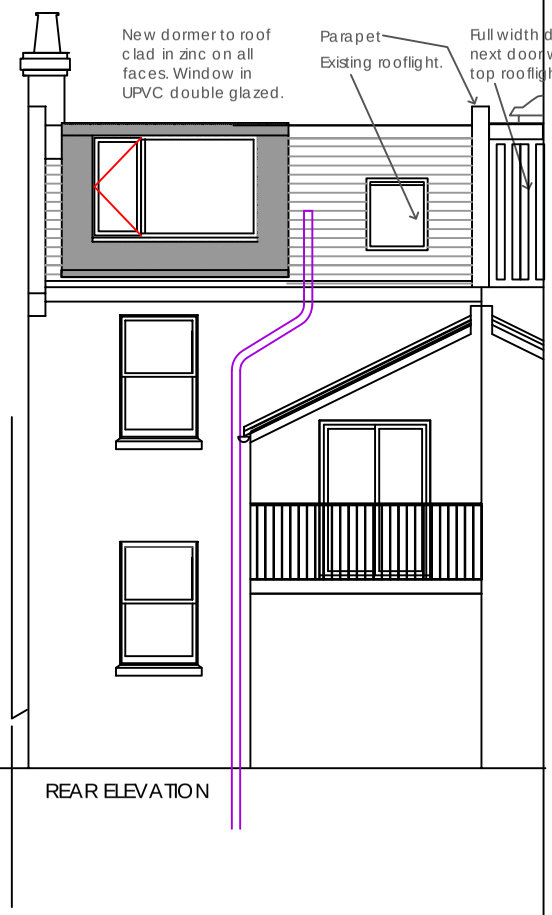

REAR ELEVATION

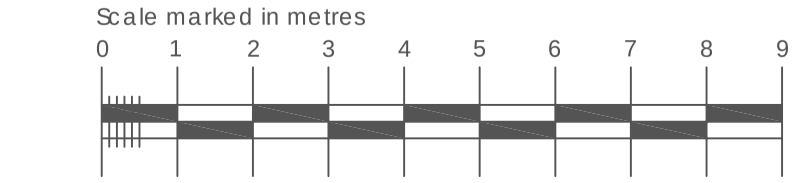



SECTION THROUGH REAR
ADDITION FIRST FLOOR
KITCHEN

SIDE ELEVATION
SOUTH

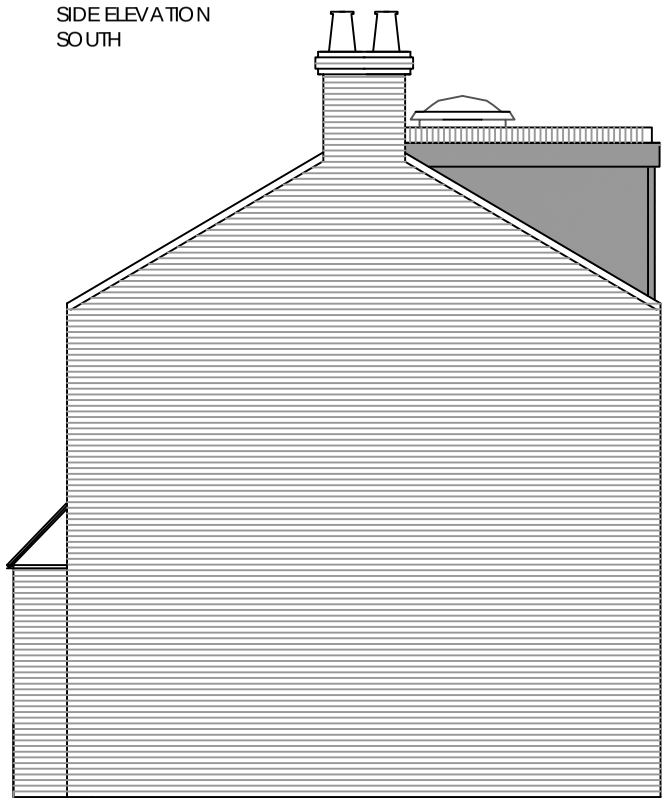

SIDE ELEVATION
NORTH

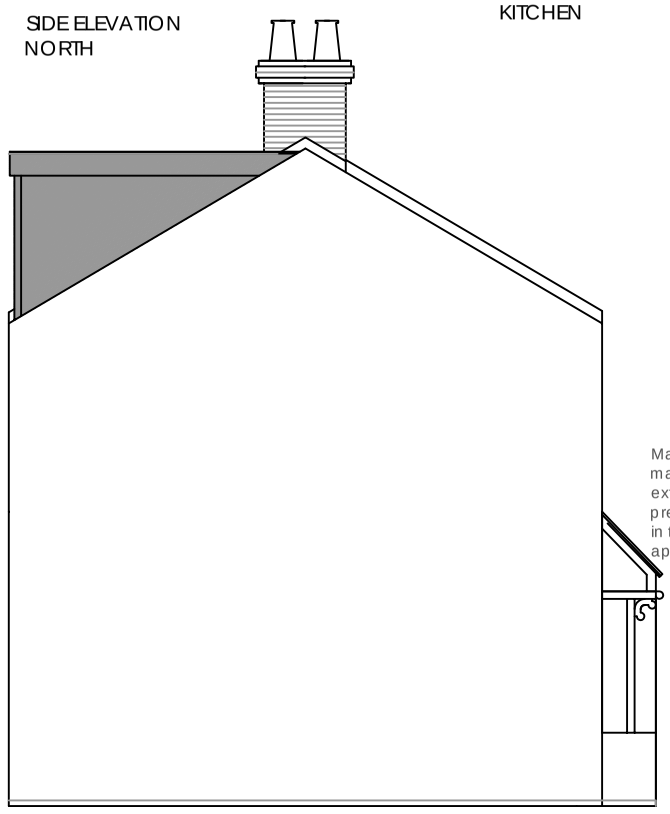

Manhole, MARLEY underground deep manhole 450mm diameter plus two extensions. Fit reduction collar to prevent man entry. Fit cast iron cover in to cast concrete surround. Invert approx 1,700mm.

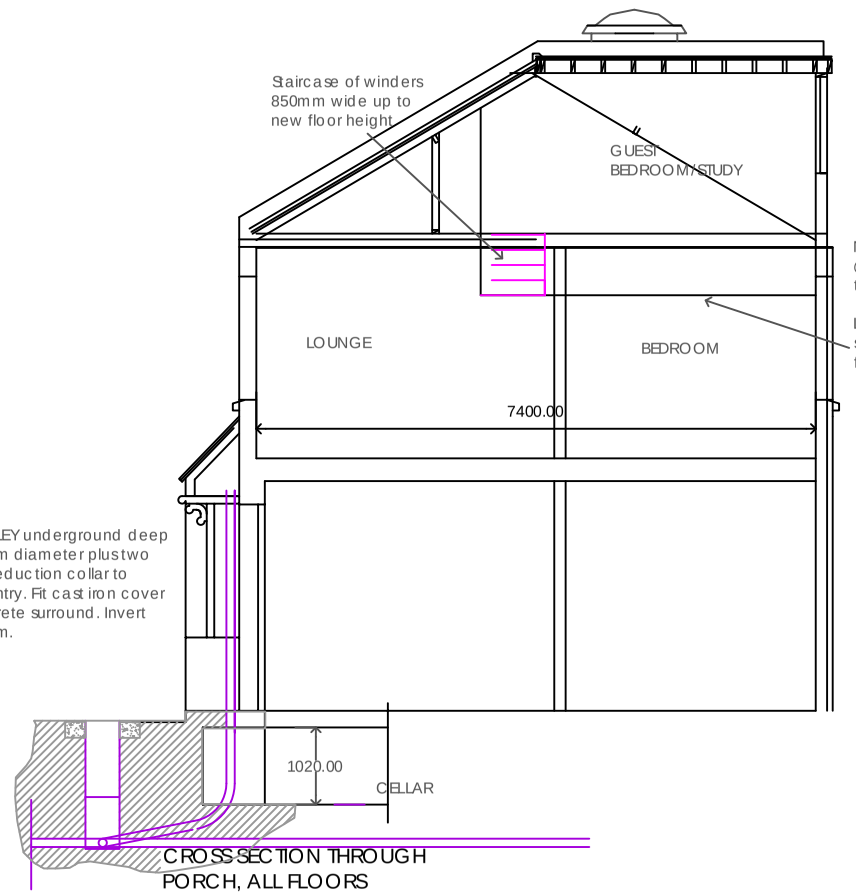

CROSS SECTION THROUGH
PORCH, ALL FLOORS

Drawing prepared in AutoCAD2006

Client

Drawing prepared by;

Copyright © MDP 2015

MDP
DESIGN

43a Staveley Gardens, Chiswick, London W4 2SA
Telephone: 020 8995 0731
e-mail: tim.mdp@btinternet.com

Drawings, detail and dimensions to be carefully checked on site prior to any form of fabrication and/ or manufacture. Written dimensions only to be referred to and do not scale the print. If in any doubt about any of the contents of this drawing or associated documents please ASK!

Notes
Health & Safety

Amendments
A
B
C
D
E

Title
PROPOSED ALTERATIONS TO
11 WOOLASTON ROAD,
LONDON N4 1SD
FIRST/SECOND FLOOR MAISONETTE

Job/Floor.
SURVEY DRAWING

Scale
1:100

Date
April 28th.2015

Drawing Number MDP

WRSM01/Proposal