Unique colours and sizes !

BRICKS (/EN/BRICKS/) CLAY PAVERS (/EN/CLAY-PAVERS/)

COLLECTION (#)

- [x] SeptimA
- [ ] Ancienne Belgique
- [ ] QUINTA
- [ ] SeptimA XL
- [ ] DecimA op aanvr


COLOUR (#)

- [ ] Brown-grey
- [ ] Yellow
- [ ] Green-grey
- [x] Mix
- [ ] Red
- [ ] Black-grey

FORMAT (#)

- [ ] ca. 183 x 43 x 88 mm
- [ ] ca. 208 x 50 x 102 mm
- [ ] ca. 208 x 67 x 102 mm
- [ ] ca. 215 x 70 x 52 mm
- [x] ca. 215 x 52 x 70 mm
- [ ] ca. 210 x 103 x 68 mm

Terrestre

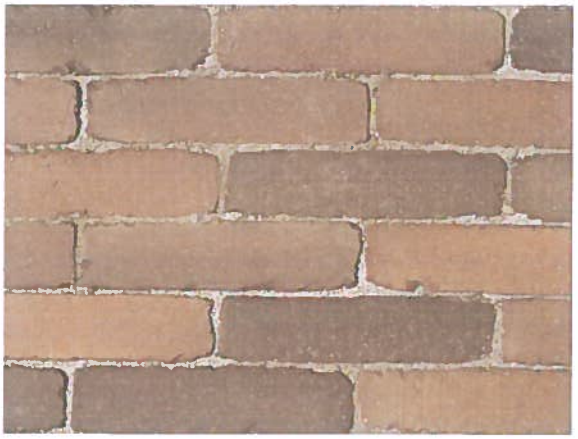

INFORMATION SHEET (/EN/CLAY-PAVERS/P/67/TERRESTRE)

PHOTO GALLERY (JAVASCRIPT:__DOPOSTBACK('CTL10$LNKFOTOGALLER

REFERENCES (MAILTO:INFO@VANDEMOORTEL.CO.UK?SUBJECT=REFLIST REQUEST)

BROCHURE (JAVASCRIPT:__DOPOSTBACK('CTL10$LNKBROCHURE','

GOOD PRACTICES (JAVASCRIPT:__DOPOSTBACK('CTL10$LNKVERWERKING

FOR PROFESSIONALS (JAVASCRIPT:__DOPOSTBACK('CTL10$LNKBESTEK_PLAN

DESCRIPTION

Unsanded clay paver, tumbled.

SIZE

ca. 215 x 52 x 70 mm (L x W x H)

STOCKIST:

NATURAL PAVING

(http://www.naturalpaving.co.uk/)

< Previous (/en/clay-pavers/p/100/olive) Back to overview (/en/clay-pavers) Next (/en/clay-pavers/p/62/melange) >

VANDE MOORTEL NV | Scheldekant 5 | BE-9700 OUDENAARDE | T +32 (0)55 33 55 66 | F +32 (0)55 33 55 70 | info@vandemoortel.be (mailto:info@vandemoortel.be)

Copyright © 2016 - Vande Moortel - All rights reserved. - Privacy Statement (/en/privacy-statement/) - Terms and Conditions of Sale (/en/terms-and-conditions-of-sale/)

DESCRIPTION : SEPTIMA "TERRESTRE" CLAY PAVERS

COLOUR

Red-brown with nuances. Tumbled, unsanded.

PRODUCT DESCRIPTION

The paving is laid in fired clay bricks of Belgian origin, quality class A, in accordance with NBN EN 1344 - PTV 910, carrying the Benor mark and the CE mark. All deliveries and samples provided are accompanied by the Benor certificate as proof. The bricks are formed individually in the mould to a solid mass, pressed from clay of alluvial origin from an area located in the Scheldt basin and fired in a tunnel oven at a temperature of approximately 1180°C. The shape is slightly irregular. Finally the bricks are processed until they have acquired a weathered shape, due to which the paver surface leaves a rustic, aged impression.

STANDARD WORK SIZE (NOMINAL)	NO./M² ON EDGE	
Ca. 215 x 52 x 70 mm	86	(size can vary depending on production)

TECHNICAL CHARACTERISTICS ACCORDING TO NBN EN 1344

Aspect	Class	Mean	Individual
Water absorption NBN EN771	W3	Max 3%	Max 4%
Transverse breaking load	T4	Min 80 N/mm	Min 64 N/mm
Abrasion resistance	A3	Max 450 mm³	Max 500 mm³
Frost resistance	FP100	freeze/thaw resistant	freeze/thaw resistant
Wet skid resistance	U3	>55	
Acid resistance	C	< 7%	
Size tolerance*	R1	Max. ± 0,4 √d	Max. 0,6 √d

* as these are tumbled pavers, they are not judged on damage/dimensions.

VANDE MOORTEL

Vande Moortel NV
Scheldekant 5 - B 9700 Oudenaarde
T. +32 (0)55 33 55 66 - F. +32 (0)55 33 55 70
Website www.vandemoortel.be
E-mail info@vandemoortel.be

"Unique colours and sizes !"

BRICKS (/EN/BRICKS/) CLAY PAVERS (/EN/CLAY-PAVERS/)

COLLECTION (#)

- [x] SeptimA
- [ ] Ancienne Belgique
- [ ] QUINTA
- [ ] SeptimA XL
- [ ] DecimA op aanvr

COLOUR (#)

- [ ] Brown-grey
- [ ] Yellow
- [ ] Green-grey
- [ ] Mix
- [ ] Red
- [x] Black-grey

FORMAT (#)

- [ ] ca. 183 x 43 x 88 mm
- [ ] ca. 208 x 50 x 102 mm
- [ ] ca. 208 x 67 x 102 mm
- [ ] ca. 215 x 70 x 52 mm
- [x] ca. 215 x 52 x 70 mm
- [ ] ca. 210 x 103 x 68 mm

Colosseum



INFORMATION SHEET (/EN/CLAY-PAVERS/P/106/COLOSSEUM)
PHOTO GALLERY (JAVASCRIPT:__DOPOSTBACK('CTL10$LNKFOTO
REFERENCES (MAILTO:INFO@VANDEMOORTEL.CO.UK?SUBJECT=REFI LIST REQUEST)
BROCHURE (JAVASCRIPT:__DOPOSTBACK('CTL10$LNKBROCHURE','')
GOOD PRACTICES (JAVASCRIPT:__DOPOSTBACK('CTL10$LNKVERWERKING
FOR PROFESSIONALS (JAVASCRIPT:__DOPOSTBACK('CTL10$LNKBESTEK_PLAN

DESCRIPTION

Sanded clay paver, tumbled.

SIZE

ca. 215 x 52 x 70 mm (L x W x H)

< Previous (/en/clay-pavers/p/103/forum) Back to overview (/en/clay-pavers) Next (/en/clay-pavers/p/107/aureum) >

VANDE MOORTEL NV | Scheldekant 5 | BE-9700 OUDENAARDE | T +32 (0)55 33 55 66 | F +32 (0)55 33 55 70 | info@vandemoortel.be (mailto:info@vandemoortel.be)
Copyright © 2016 - Vande Moortel - All rights reserved. - Privacy Statement (/en/privacy-statement/) - Terms and Conditions of Sale (/en/terms-and-conditions-of-sale/)

DESCRIPTION : SEPTIMA "TERRESTRE" CLAY PAVERS

COLOUR

Red-brown with nuances. Tumbled, unsanded.

PRODUCT DESCRIPTION

The paving is laid in fired clay bricks of Belgian origin, quality class A, in accordance with NBN EN 1344 - PTV 910, carrying the Benor mark and the CE mark. All deliveries and samples provided are accompanied by the Benor certificate as proof. The bricks are formed individually in the mould to a solid mass, pressed from clay of alluvial origin from an area located in the Scheldt basin and fired in a tunnel oven at a temperature of approximately 1180°C. The shape is slightly irregular. Finally the bricks are processed until they have acquired a weathered shape, due to which the paver surface leaves a rustic, aged impression.

STANDARD WORK SIZE (NOMINAL) NO./M² ON EDGE

Ca. 215 x 52 x 70 mm 86 (size can vary depending on production)

TECHNICAL CHARACTERISTICS ACCORDING TO NBN EN 1344

Aspect	Class	Mean	Individual
Water absorption NBN EN771	W3	Max 3%	Max 4%
Transverse breaking load	T4	Min 80 N/mm	Min 64 N/mm
Abrasion resistance	A3	Max 450 mm³	Max 500 mm³
Frost resistance	FP100	freeze/thaw resistant	freeze/thaw resistant
Wet skid resistance	U3	>55	
Acid resistance	C	< 7%	
Size tolerance*	R1	Max. ± 0,4 √d	Max. 0,6 √d

* as these are tumbled pavers, they are not judged on damage/dimensions.

VANDE MOORTEL

Vande Moortel NV
Scheldekant 5 - B 9700 Oudenaarde
T. +32 (0)55 33 55 66 - F. +32 (0)55 33 55 70
Website www.vandemoortel.be
E-mail info@vandemoortel.be