
Cl/SfB | | (47) | Nf9 | |
July 2015

MarleyEternit

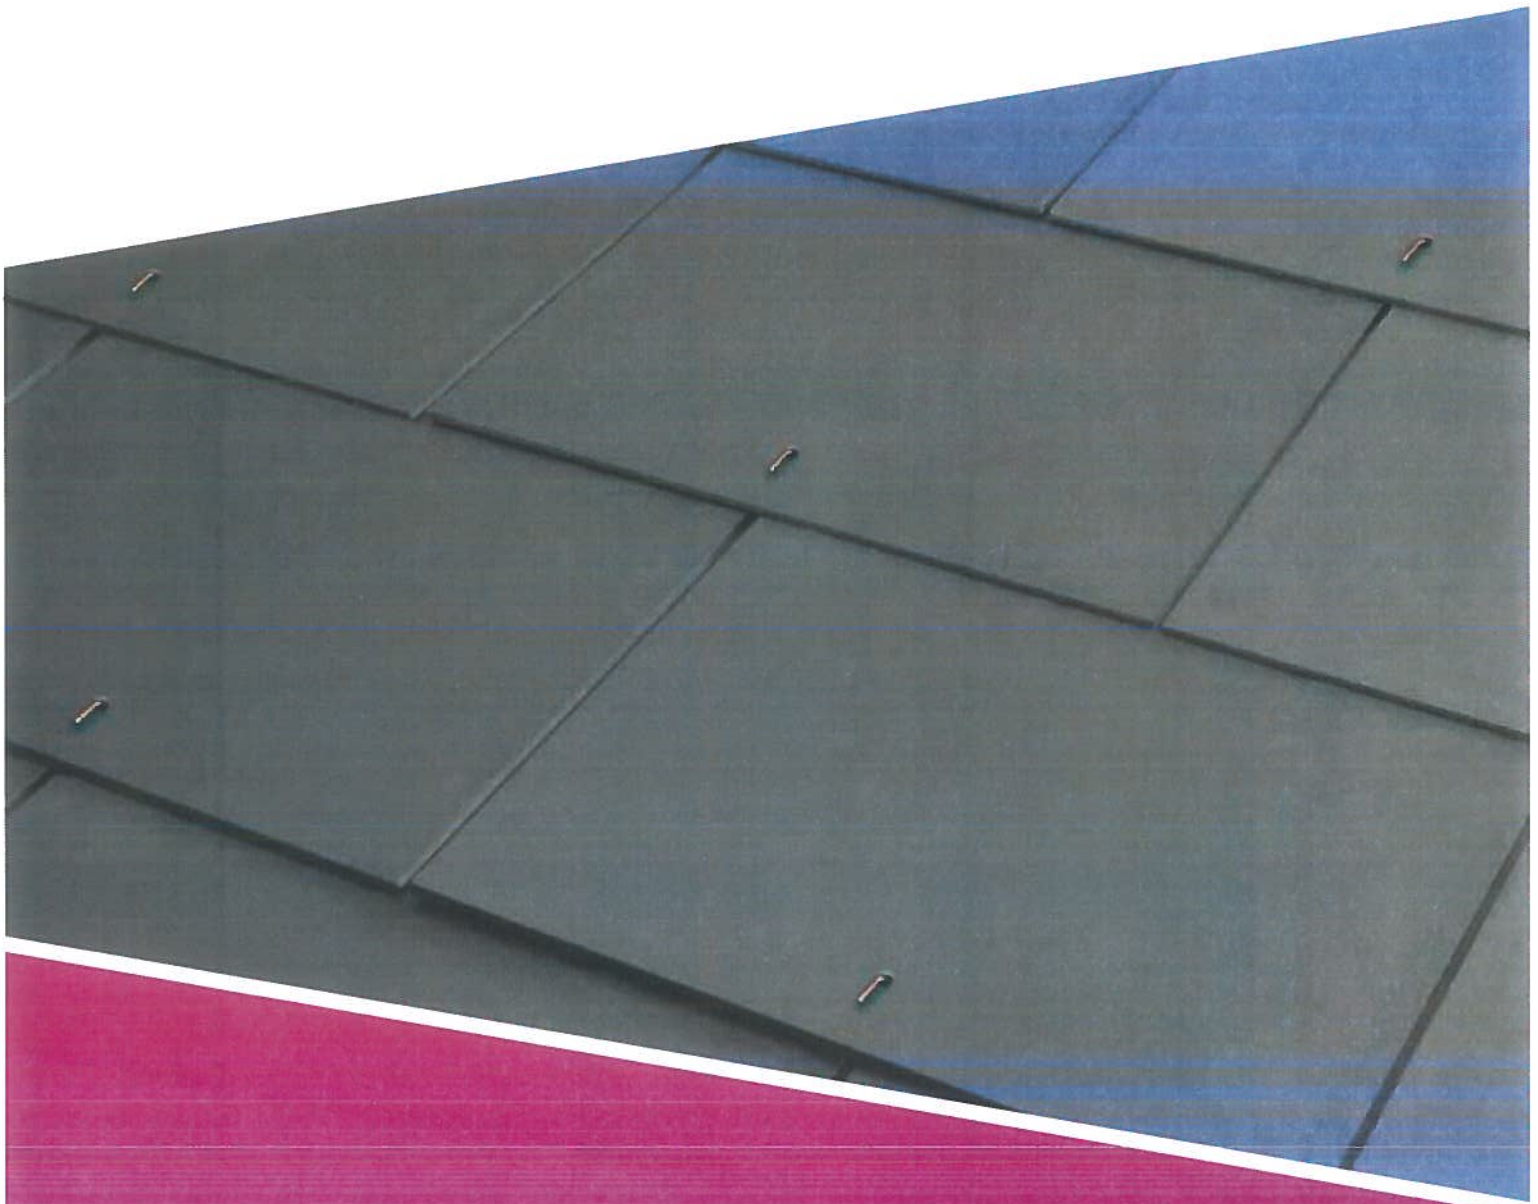

Graphite & Zinc Grey

Thrutone fibre cement slates

new colours

Graphite & Zinc Grey

Thrutone fibre cement slates


Thrutone Graphite


Thrutone Zinc Grey

To help you create even more interesting roof designs, Marley Eternit has added the new Graphite and Zinc Grey colours to the popular Thrutone range.

Thrutone is a low profile slate particularly suited to complex roof geometries.

Sustainability

Green guide rating	A+ (Element Ref: 812410008)
BES 6001	Very good – can achieve 3 credits
EPD available for Thrutone slates	

Technical data

Size of slate	600mm x 300mm	
Minimum pitch**	Moderate exposure	22.5° (100mm lap) 20° (110mm lap)
	Severe exposure	25° (100mm lap) 22.5° (110mm lap)
	4m max. rafter length	15°-17.5° (110mm lap)
	6m max. rafter length	17.5°-20° (110mm lap)
Maximum pitch	90°	
Typical laps	100, 110mm	
Maximum gauge	245-250mm	
Slate thickness	4mm	
Covering capacity (net)	13.4 slates/m² at 100mm lap 13.6 slates/m² at 110mm lap	
Weight of slating (approx.)	20.4 kg/m² (0.20 kN/m²) at 100mm lap 20.9 kg/m² (0.20 kN/m²) at 110mm lap	
Battens required (net)	4.00 lin.m/m² at 100mm lap 4.08 lin.m/m² at 110mm lap	
Batten size recommended (fixed to BS 5534)	38 x 25mm for rafters/supports not exceeding 450mm centres 50 x 25mm for rafters/supports not exceeding 600mm centres	
Fixings	Slate nails (30 x 2.65mm) Copper disc rivets (19mm dia. x 2mm stem)	
Fittings screws	14 gauge self sealing	
Authority	BS EN 492	

* Marley Eternit fibre cement slates meet the strength requirement of BS EN 492, achieving an average bending movement greater than 50 NM/M (Class B). The slates also have a minimum density of 1700 kg/m³ and a nominal thickness of 4mm.

** The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

Call 01283 722588
Email info@marleyeternit.co.uk
Or visit www.marleyeternit.co.uk

Marley Eternit Lichfield Road Branston Burton upon Trent DE14 3HD

MarleyEternit

an etex company

This publication is based on the latest data available at the time of printing. Due to product changes, improvements and other factors, the Company reserves the right to change or withdraw information contained herein without prior notice. For specific applications users should refer to the Technical Advisory Service and relevant Standards and Codes of Practice for guidance. The photography shown in the document should not necessarily be taken as recommendations of good practice. The printing process restricts the exact representation of colours. For true colour reference, please request product samples.