


# BS 5837 Arboricultural Report

## (Pre-Planning)



at

**9 Waverley Road  
London  
N8 9QS**

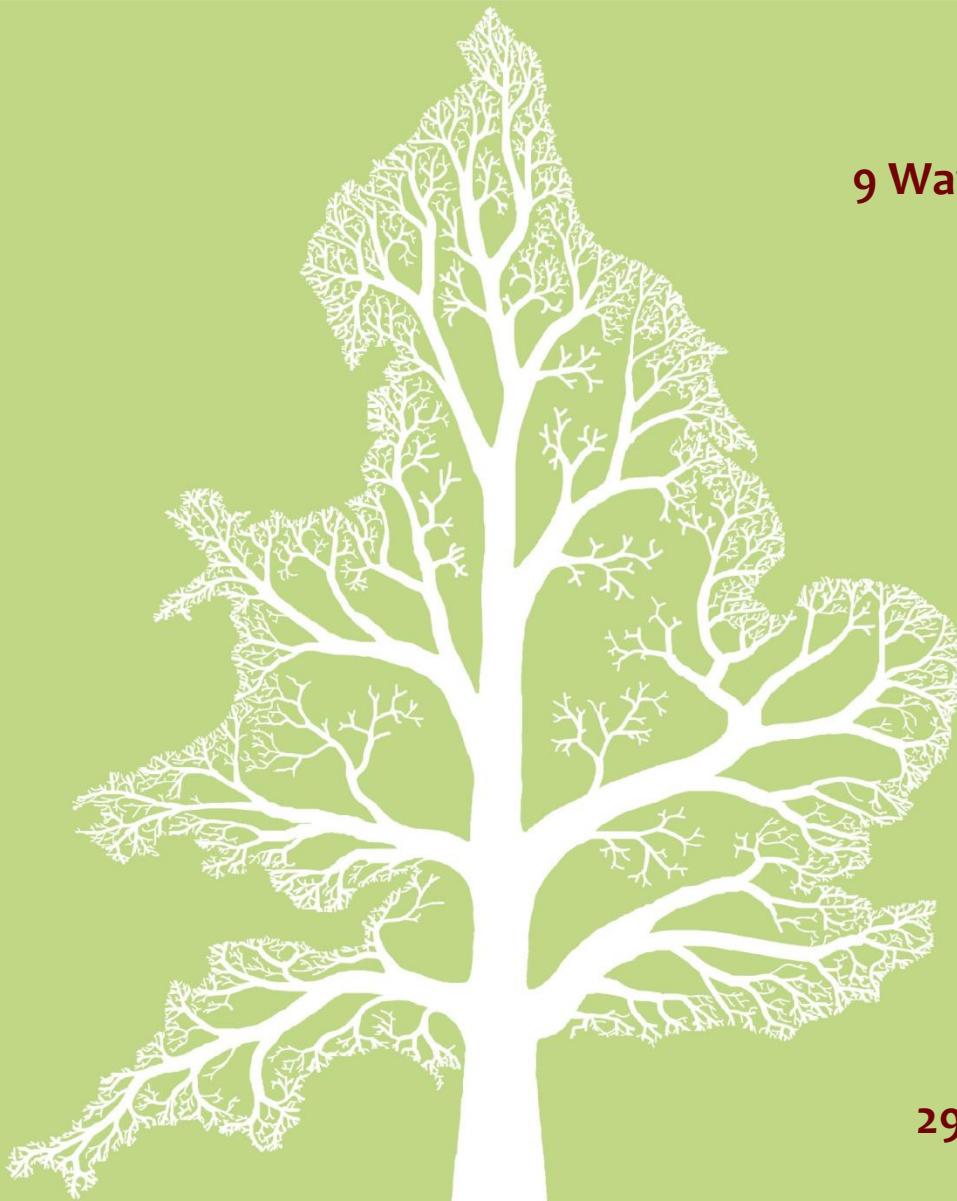

**Dated  
29<sup>th</sup> May 2020**



**CROWN**  
Tree Consultancy

Branching out through England and Wales



PDF readers select page-width for detail & page-view for scrolling

Arboricultural Report to BS 5837: 2012 for: Stockwool

Crown Ref: 10524

Site: 9 Waverley Road, London

Author: Emma Hoyle

Date: 29<sup>th</sup> May 2020

## Contents

|                                                            |                                                       |           |
|------------------------------------------------------------|-------------------------------------------------------|-----------|
| <b>1.</b>                                                  | <b>Introduction</b>                                   | <b>3</b>  |
| 1.1.                                                       | Instruction                                           | 3         |
| 1.2.                                                       | Scope and Purpose of the Report                       | 3         |
| 1.3.                                                       | Survey Details and Findings                           | 3         |
| 1.4.                                                       | Drawings                                              | 3         |
| 1.5.                                                       | Author                                                | 4         |
| <b>2.</b>                                                  | <b>Site Overview</b>                                  | <b>5</b>  |
| 2.1.                                                       | Brief Description                                     | 5         |
| 2.2.                                                       | Coordinates                                           | 5         |
| 2.3.                                                       | Survey Extent                                         | 5         |
| <b>3.</b>                                                  | <b>Vegetation Overview (independent of proposals)</b> | <b>6</b>  |
| 3.1.                                                       | Preliminary Management Recommendations                | 6         |
| 3.2.                                                       | Work Priority and Future Inspections                  | 6         |
| 3.3.                                                       | Tree Protection Status – Site Specific                | 7         |
| 3.4.                                                       | Tree Protection – General Notes                       | 7         |
| 3.5.                                                       | Species Present – Additional Information              | 7         |
| <b>4.</b>                                                  | <b>Implications for Development</b>                   | <b>9</b>  |
| 4.1.                                                       | Retention Categories                                  | 9         |
| 4.2.                                                       | Root Protection Areas                                 | 9         |
| 4.3.                                                       | Tree Canopies                                         | 10        |
| 4.4.                                                       | Arboricultural Impact Assessment                      | 10        |
| 4.5.                                                       | Tree Protection During Construction                   | 10        |
| <b>5.</b>                                                  | <b>Photographs</b>                                    | <b>12</b> |
| <b>Appendix 1: BS 5837: 2012 – Guidance Notes</b>          |                                                       | <b>14</b> |
| <b>Appendix 2: Explanation of Tree Data &amp; Glossary</b> |                                                       | <b>16</b> |
| <b>Appendix 3: Survey Methodology</b>                      |                                                       | <b>20</b> |
| <b>Appendix 4: Author's Qualifications</b>                 |                                                       | <b>21</b> |
| <b>Appendix 5: Further Information</b>                     |                                                       | <b>22</b> |
| <b>Appendix 6: Tree Data Schedule and Site Plan(s)</b>     |                                                       | <b>23</b> |



# 1. Introduction

## 1.1. Instruction

1.1.1. We are instructed by Stockwool to:

- Undertake an Arboricultural Survey at 9 Waverley Road and assess all trees potentially within influencing distance of proposed development within the site.
- Plot the trees on a Tree Constraints Plan and record the data in a Tree Data Schedule.
- Provide an overview of the site and any management recommendations.
- Determine if any of the trees are growing within a conservation area or are protected by a tree preservation order.
- Provide guidance for architects or developers to enable them to understand and design within the existing tree constraints.

## 1.2. Scope and Purpose of the Report

1.2.1. This report is designed to assist parties interested in developing the site to understand the constraints that are presented by any trees within the curtilage of the site or adjacent to it.

1.2.2. It primarily contains information to assist designers and developers whilst being fully compliant with local authority planning requirements. This report does not take into account specific design proposals which were not available at the time of writing. Where significant trees could be impacted upon by development proposals, we advise that this report is integrated into a suitably detailed arboricultural impact assessment in order to meet validation requirements for a planning application.

1.2.3. This report is produced according to the guidance and recommendations within BS 5837: 2012 - *Trees in Relation to Design, Demolition and Construction*.

## 1.3. Survey Details and Findings

1.3.1. A visual ground level inspection of all trees was undertaken on the 15<sup>th</sup> April 2020 by Joe Taylor. No climbed inspections or specialist decay detection were undertaken. Details of how the survey was undertaken can be found in Appendix 1.

1.3.2. The findings of the survey are presented in The Tree Data Schedule which is provided as a separate document as well as being appended to the end of this document within Appendix 6. The vegetation is further discussed in Section 3.

1.3.3. The Schedule includes scaled tree images based on measurements recorded for stem diameter, crown spread, crown height and overall height. Their purpose is to indicate, at a glance, the relative dimensions of each tree.

1.3.4. A definition of the Retention Categories can be found in Appendix 1. All other terms used within the Tree Data Schedule are defined and explained in Appendix 2. A more detailed description of the survey method is detailed in Appendix 3.

## 1.4. Drawings

1.4.1. The tree locations shown on the accompanying plans which are reproduced in Appendix 6 are based on a measured plan of the site supplied to Crown Tree Consultancy. This plan



had the tree positions already plotted. Where applicable, additional trees have been plotted by us according to measurements taken on site.

1.4.2. The *Tree Constraints Plan* shows the existing layout. For each tree the stem location is indicated and scaled according to its diameter, the canopy is indicated according to measurements taken along the four cardinal points of the compass. Root protection areas (RPAs) are indicated which are calculated according to the guidelines within BS 5837 (2012).

1.4.3. Where appropriate, the shapes of the RPAs have been amended to reflect actual site conditions or where trees have been heavily pruned. The 'original' RPAs are indicated as a dashed line whereas the amended RPAs are indicated as a solid line.

## 1.5. Author

1.5.1. This report was compiled by Emma Hoyle FDS (Arboriculture), ED (Forestry & Arboriculture), M. Arbor. A. Details of the author's experience that qualify her to produce such a report are detailed in Appendix 4.



## 2. Site Overview

### 2.1. Brief Description

- 2.1.1. 9 Waverley Road is a detached, residential property. A dual entrance driveway and parking area occupies the front of the property with a low retained planter adjacent the front boundary wall. A Retention Category A Beech tree (T1) and a Retention Category B Lime tree (T3) grow at the front of the property.
- 2.1.2. The rear garden is largely given over to a lawn with steps leading down from the rear of the building onto pedestrian footpaths. One Retention Category A Ash tree (T4), seven Retention Category B trees (T7, T8, G9 and T17), four Retention Category C trees (T5, T6, T10 and T13) and one Retention Category U tree (T12) grow within the rear garden.
- 2.1.3. Adjacent to the site and overhanging the boundaries of the rear garden is a Retention Category B tree (T16), two Retention Category C trees (T11 and T14) and a Retention Category C hedge (H15). The roots of these trees may extend into the site.
- 2.1.4. The site is a rectangular plot measuring approximately 50m by 24m and the front of the property is at a slightly higher level than the rear.
- 2.1.5. The Tree Constraints Plan and Tree Data Schedule (see Appendix 6) should be referred to for descriptions and locations of all trees.

### 2.2. Coordinates

- 2.2.1. The site coordinates are  $0^{\circ} 7'30.23''\text{W } 51^{\circ}34'32.38''\text{N}$  and the altitude is approximately 67m above sea level<sup>1</sup>.

### 2.3. Survey Extent

- 2.3.1. We surveyed the front and rear gardens along with all trees beyond the curtilage of the property which could potentially be affected by any development within it. The area indicated below<sup>2</sup> shows the extent of the site.



<sup>1</sup> To access satellite imagery and street views of the site these co-ordinates may be entered into: <http://maps.google.co.uk/>

<sup>2</sup> Image taken from Google Earth and may not be current



### 3. Vegetation Overview (independent of proposals)

This section summarises all the recommendations within the Tree Data Schedule regardless of whether trees are to be retained, felled or pruned to facilitate the proposed development. It does not specify works that may be required to facilitate the development proposals. The protection status of the trees is also reported in this section.

#### 3.1. Preliminary Management Recommendations

- 3.1.1. The following recommendations are made in order to maintain the trees in an acceptable condition:
- 3.1.2. **T1**, a mature Beech, has a significant cavity forming on the southern side of its stem at approximately 2.5m above ground level. We recommend a climbed inspection of the cavity is undertaken to determine the extent of any decay that may be present.
- 3.1.3. **T8**, a semi-mature London Plane, was observed to have a cavity where its secondary stem has torn out in the past. We recommend a climbed inspection is undertaken to inspect the cavity for any decay that may be present.
- 3.1.4. **T12** is a dead Pear tree. We recommend this tree is removed.
- 3.1.5. **T17** is a mature Lime tree. This tree has a dense canopy along with a covering ivy which prevented a detailed inspection. We recommend undertaking remedial pruning to clean the canopy of any dead, dying or defective branches and remove the ivy in order to enable a better inspection of the tree.
- 3.1.6. **T3** and **T7** could not be fully inspected due to a covering of ivy. We recommended the ivy is removed so that the stems may be re-inspected to ascertain their structural condition.
- 3.1.7. All other trees were deemed to be in an acceptable condition.

#### 3.2. Work Priority and Future Inspections

- 3.2.1. The table below suggests a schedule for completing the works recommended in the Tree Data Schedule based on the perceived risk:

| Work Priority    | Definition          | Tree Number        |
|------------------|---------------------|--------------------|
| <b>Urgent</b>    | As soon as possible | None               |
| <b>Very High</b> | Within 1 Month      | None               |
| <b>High</b>      | Within 3 Months     | T1 and T17         |
| <b>Moderate</b>  | Within 1 year       | T3, T7, T8 and T12 |
| <b>Low</b>       | Within 3 years      | None               |

- 3.2.2. The table below suggests a schedule of future inspections based on the condition and location of each tree:

| Inspection Frequency (years) | Tree Number                                                 |
|------------------------------|-------------------------------------------------------------|
| <b>0.5</b>                   | None                                                        |
| <b>1</b>                     | T1 and T3                                                   |
| <b>1.5</b>                   | T17                                                         |
| <b>3</b>                     | T2, T4, T5, T6, T7, T8, G9, T10, T11, T13, T14, H15 and T16 |

- 3.2.3. The trees should be inspected sooner if there is a noticeable decline in their condition or following extreme weather events.



### 3.3. Tree Protection Status – Site Specific

3.3.1. On 27<sup>th</sup> March 2020, we visited the local authority website (London Borough of Haringey) which informed us that:

- The site lies within Crouch End Conservation Area.
- There are Tree Preservation Orders affecting 2 x Beech and 3 x Lime trees within the site (TPO Refs: 2014/2178, 2014/1194 and 2014/1195).
- There are Tree Preservation Orders affecting 8 x Lime trees at the adjacent property, Midhurst Court (TPO Ref: 2014/1122).

### 3.4. Tree Protection – General Notes

3.4.1. Before undertaking works to trees protected by a tree preservation order, consent needs to be obtained from the local authority which will provide application forms and advice to potential applicants. The removal of dead wood is exempt.

3.4.2. Where the works are proposed for reasons of safety or ill health, a report from a suitably qualified arborist will usually be required. Trees that are dead or imminently dangerous are technically exempt from protection, as are dead branches. If the tree work is not urgently necessary however, at least five working days notice of intention should be given to the local authority. In any case it would be prudent to take photographs before undertaking works without prior consent being granted. Unauthorised works to protected trees may result in a criminal prosecution and a large fine (unlimited).

3.4.3. Where trees are located in a conservation area (but not protected by a TPO), works are not permitted without first giving the local authority 6 weeks' notice of intention. During this time the local authority may elect to create a tree preservation order or to inform the applicant that they have no objection to the proposed works. If the local authority does not respond within 6 weeks, then the intended work may be undertaken. Note: the local authority cannot refuse consent for works to trees within a conservation area; they may only create a tree preservation order if they wish to have further control over what works are undertaken.

3.4.4. Where planning permission is granted and tree works have been approved as part of the planning consent, no further application is required in respect of protected trees and no further notice is required in respect of trees within a conservation area.

### 3.5. Species Present – Additional Information

3.5.1. The table below contains general information about the tree *species* (rather than the actual tree *specimens*) included in the survey. Its purpose is to assist readers who are unfamiliar with the characteristics of the various species.

| Species | Typical Height at Maturity (m) | Typical Canopy Spread at Maturity (m) | General Notes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------|--------------------------------|---------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Ash     | 25                             | 18                                    | Large deciduous tree with a straight bole and a high open domed crown. Native to Britain and commonly found in woodlands and adjacent roadsides. Not suitable for small gardens. Easily identified by its oppositely arranged pinnate leaves and black buds. Branches are relatively brittle resulting in a fairly high incidence of small branch failure in windy conditions. Visit <a href="http://www.pfaf.org/user/Plant.aspx?LatinName=Fraxinus+excelsior">http://www.pfaf.org/user/Plant.aspx?LatinName=Fraxinus+excelsior</a> for more info. |
| Elder   | 8                              | 8                                     | Deciduous tree native throughout Europe, N Africa and W Asia. Untidy, shrubby habit. Very fast growing. Covered in dense creamy flowers and deep red berries which are excellent for making wine. Visit <a href="http://www.pfaf.org/user/Plant.aspx?LatinName=Sambucus+nigra">http://www.pfaf.org/user/Plant.aspx?LatinName=Sambucus+nigra</a> for more info.                                                                                                                                                                                      |



| Species        | Typical Height at Maturity (m) | Typical Canopy Spread at Maturity (m) | General Notes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|----------------|--------------------------------|---------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| False Acacia   | 20                             | 12                                    | Deciduous fast-growing tree native to the US. Part of the pea family and its roots fix nitrogen. Bright yellow 'Frisia' cultivar is widely planted in gardens. All parts are toxic except the flowers which appear in June. Seed pods ripen in winter.<br>Visit <a href="http://www.pfaf.org/user/Plant.aspx?LatinName=Robinia+pseudoacacia">http://www.pfaf.org/user/Plant.aspx?LatinName=Robinia+pseudoacacia</a> for more info.                                                                                                                                                                                                                       |
| Holly          | 16                             | 12                                    | Evergreen tree native across Western Europe. Many cultivars available, often with variegated leaves. Females produce bright red berries. Good wildlife value.<br>Visit <a href="http://www.pfaf.org/user/Plant.aspx?LatinName=Ilex+aquifolium">http://www.pfaf.org/user/Plant.aspx?LatinName=Ilex+aquifolium</a> for more info.                                                                                                                                                                                                                                                                                                                          |
| Lawson Cypress | 40                             | 10                                    | Erect, narrowly conical evergreen tree native to Southwest Oregon and N. W. California. Introduced to Britain in the 1850's and now a common tree in gardens and parks. Makes an excellent dense hedge. Many varieties are available including golden and miniature varieties. Easily distinguished from Leyland cypress by the presence of small cones.<br>Visit <a href="http://www.pfaf.org/user/Plant.aspx?LatinName=Chamaecyparis+lawsoniana">http://www.pfaf.org/user/Plant.aspx?LatinName=Chamaecyparis+lawsoniana</a> for more info.                                                                                                             |
| Lime           | 25                             | 12                                    | Very common street tree. Several species exist; the one most often found in woods is 'common lime' which produces a mass of suckers at the stem base, making it very cheap to propagate. Limes have non-symmetrical heart shaped leaves which are much loved by aphids (hence the sticky honeydew on cars parked beneath). Limes are tolerant of heavy pruning and are often managed as pollards. Old limes tend to support a lot of small dead branches. Visit <a href="http://www.pfaf.org/user/Plant.aspx?LatinName=Tilia+x+europaea">http://www.pfaf.org/user/Plant.aspx?LatinName=Tilia+x+europaea</a> for more info.                               |
| London Plane   | 30                             | 20                                    | Deciduous tree arisen in cultivation probably as a cross between the Oriental Plane and the American Buttonwood. Has attractive bark which peels off in small plates leaving a multicoloured flecked pattern. Very common as a street tree, especially throughout London where it dominates the streetscape. Often managed as a pollard in order to constrain its large size to more manageable proportions, especially where there are clay soils and adjacent buildings. Somewhat susceptible to the decay fungus Inonotus hispidus.<br>Visit <a href="http://en.wikipedia.org/wiki/Platanus">http://en.wikipedia.org/wiki/Platanus</a> for more info. |
| Pear           | 8                              | 8                                     | Deciduous tree native across Europe and W Asia. Hundreds of cultivars available due to its popular fruit. White flowers in spring along with bright green foliage. More upright growth habit than most apples.                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Purple Beech   | 27                             | 20                                    | Purple variety of the common beech, also called Copper Beech. A majestic tree with grey bark and purple leaves. The best forms are grafted though this species does occasionally appear in the wild.<br>Visit <a href="http://en.wikipedia.org/wiki/Fagus_sylvatica">http://en.wikipedia.org/wiki/Fagus_sylvatica</a> for more info.                                                                                                                                                                                                                                                                                                                     |
| Sycamore       | 25                             | 16                                    | Deciduous tree native to S. Europe, widely naturalised in the UK. Often regarded as a weed species due to its invasive nature and ability to tolerate most conditions. Responds well to pruning. Not a good tree to park beneath in summer due to the sticky sap secreted by aphids.<br>Visit <a href="http://www.pfaf.org/user/Plant.aspx?LatinName=Acer+pseudoplatanus">http://www.pfaf.org/user/Plant.aspx?LatinName=Acer+pseudoplatanus</a> for more info                                                                                                                                                                                            |
| Yew            | 14                             | 12                                    | Evergreen species native throughout Europe. Commonly planted in churchyards. Once revered by ancient Britons and thought to be the inspiration for our Christmas tree. Capable of remarkable regeneration and extreme longevity. Poisonous foliage and seeds. Slow growing. Visit <a href="http://www.pfaf.org/user/Plant.aspx?LatinName=Taxus+baccata">http://www.pfaf.org/user/Plant.aspx?LatinName=Taxus+baccata</a> for more info.                                                                                                                                                                                                                   |

3.5.2. The figures quoted regarding typical height and canopy spread should be treated as approximate. Actual heights and spreads vary according to several environmental factors such as soil conditions, climate and presence of competing vegetation. The figures quoted are not the maximum dimensions that the species may attain.



## 4. Implications for Development

This section of the report offers general advice on dealing with tree related constraints. It is intended to assist designers to work with the Tree Constraints Plan. Examples of mitigation strategies are included which may reduce potential impacts on trees. Persons familiar with BS 5837 Arboricultural Reports (e.g. tree officers) may wish to skip this section and go straight to the following section.

### 4.1. Retention Categories

4.1.1. The Tree Constraints Plan indicates the BS 5837 Retention Categories for each tree. These should be taken into account during the design stage of any development proposals according to the following criteria:

- 4.1.2. Wherever possible, Category A trees should be retained. These are usually large trees with a relatively high amenity value. They are generally in good condition, well suited to their surroundings and with a significant life expectancy.
- 4.1.3. The retention of Category B trees is also desirable, though these trees are of a lesser quality, or have a reduced life expectancy or are smaller than category A trees.
- 4.1.4. The retention of Category C trees should be seen as optional. These are usually small trees or trees of no particular merit and are not considered to be a material planning consideration.
- 4.1.5. Category U trees have been recommended for removal due to their poor condition, and should be removed regardless of development proposals.

### 4.2. Root Protection Areas

- 4.2.1. The Tree Constraints Plan indicates the Root Protection Areas of each tree. This does not represent the maximum extent of rooting activity; rather, it defines the area within which the majority of roots are expected to be confined. Wherever possible, this should be left undisturbed for all trees to be retained. In which case the trees shall be unharmed. Significant disturbances such as changes in ground level, soil compaction, excavation of trenches, or interference with oxygen and rainwater exchange may have a significant impact on the health of the tree. (Soil compaction may be caused by vehicles, plant machinery, excessive pedestrian usage, storing of materials/spoil or by the installation of a new vehicular surface.)
- 4.2.2. Some disturbance of the Root Protection Area may be acceptable but must be kept to a minimum. Construction methods should be adopted that are sympathetic to root requirements:
- 4.2.3. Concrete strip foundations should be avoided except at the very extremity of the Root Protection Area. Instead, pile/pier and beam foundations or raft foundations should be utilised. These will minimise root severance.
- 4.2.4. Hard surfaces should be installed with the minimum of excavation. The majority of roots lie within the upper soil horizons and are relatively fine. Roots do not need to be as thick as branches, since they do not have to combat gravity and high winds etc. A root as thin as a finger is able to transport a lot of nutrients. Thus, excavation as shallow as 30cm can have a significant impact on the health of a tree even though large roots might not be severed. Cellular confinement systems help to reduce the amount of excavation required to give a driveway adequate strength.



- 4.2.5. Hard surfaces should ideally be porous to allow rainwater and oxygen to pass into the soil. Gravel is the ideal medium and can be retained in a cellular system to prevent rutting. Block paving and flagstones without mortar joints are a good alternative. Tarmac is not very porous; the use of a no-fines tarmac is preferable.
- 4.2.6. Trenches for underground services are commonly overlooked but can cause major damage to trees. Further arboricultural advice should be sought if underground services are to pass within Root Protection Areas. Trenchless techniques can sometimes be utilised but are not usually practical for installing drains.
- 4.2.7. If ground levels are to be raised, this should always be done with a loose granular material such as gravel or coarse sand. Ground levels must never be raised against the trunks of trees as this may cause them to rot.
- 4.2.8. It is sometimes possible to mitigate against root disturbance, by above ground pruning or by improving rooting conditions for existing roots. The introduction of mycorrhizal fungi and earth worms significantly improves rooting conditions, as does the removal of competing vegetation such as grass.
- 4.2.9. Soil compaction occurs when vehicles repeatedly pass over rooting areas without some kind of structure to disperse their weight. Healthy soils will contain approximately 25% airspace. When soils become compacted these air spaces disappear and roots are unable to respire. It is possible to de-compact soils but this is an expensive operation. It is preferable to avoid compaction, by spreading the load of traffic passing over Root Protection Areas with the use of metal road plates or suitable boards.

### 4.3. Tree Canopies

- 4.3.1. Where trees are to be retained, adequate space should be allowed between buildings and tree canopies. A minimum distance of 3m is recommended. For high quality trees (Category A or B) which have not yet reached maturity a further allowance should be made to allow the canopies to mature without the need for extensive pruning.
- 4.3.2. For residential dwellings, the shade cast by trees should be also taken into account. Particularly where buildings are located north or north-east of sizeable trees. Some species e.g. birch, have light airy canopies so shade is less of an issue. Commonly occurring trees which cast quite dense shade include beech, oak, ash, chestnut, sycamore, lime and most evergreen species. Shade constraints are less of an issue for garages and other non-residential buildings.
- 4.3.3. More sources of information regarding the above points can be found within Appendix 5. Crown Tree Consultancy will gladly offer any further advice, and you are invited to contact the author of this report on 01422 316660.

### 4.4. Arboricultural Impact Assessment

- 4.4.1. When development proposals are available we recommend that an Impact Assessment is carried out before submission to the Local Planning Authority. This will identify any potential issues so that they may be resolved or mitigated against.

### 4.5. Tree Protection During Construction

BS 5837 recommends that an Arboricultural Method Statement is adhered to which ensures that all retained trees are adequately protected during the construction phase. This should be highly site specific and take into account such things as hard surface design, implementation of services and foundations, storage of materials, scaffolding,



PDF readers select *page-width* for detail & *page-view* for scrolling

Arboricultural Report to BS 5837: 2012 for: Stockwool

Crown Ref: 10524

Site: 9 Waverley Road, London

Author: Emma Hoyle

Date: 29<sup>th</sup> May 2020

---

use of heavy plant such as cranes or excavators, protective fencing specification, and necessary tree works. Adherence to such a Method Statement will help to minimise the impact of the development.



PDF readers select *page-width* for detail & *page-view* for scrolling

Arboricultural Report to BS 5837: 2012 for:

Stockwool

Crown Ref: 10524

Site: 9 Waverley Road, London

Author: Emma Hoyle

Date: 29<sup>th</sup> May 2020

## 5. Photographs



Photo 2.



Photo 3.



Photo 4.



Photo 5.



Photo 6.





PDF readers select *page-width* for detail & *page-view* for scrolling

Arboricultural Report to BS 5837: 2012 for:

Stockwool

Crown Ref: 10524

Site: 9 Waverley Road, London

Author: Emma Hoyle

Date: 29<sup>th</sup> May 2020

Photo 7.



Photo 8.



Photo 9.



Photo 10.

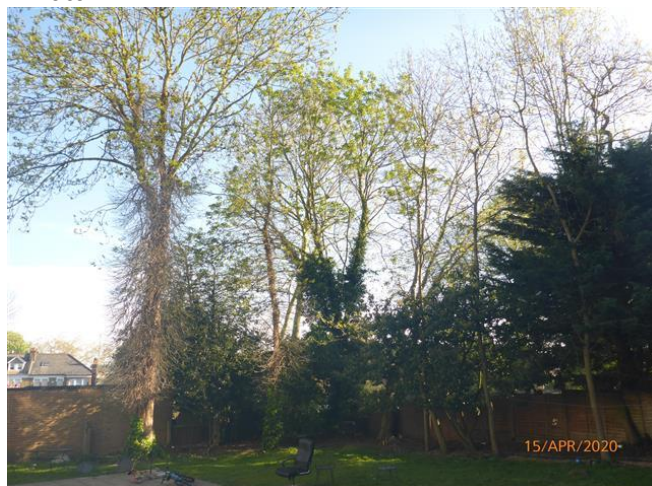


Photo 11.



Photo 12.





## Appendix 1: BS 5837: 2012 – Guidance Notes

This Standard prescribes the principles to be applied to achieve a satisfactory juxtaposition of trees and structures. It sets out to assist those concerned with trees in relation to design, demolition and construction to form balanced judgements.

It acknowledges the positive contribution trees may offer to a site, as well as the negative aspects of retaining inappropriate trees. It addresses the negative impacts that construction activity may have upon trees and offers mitigation strategies to minimise these impacts.

The Standard suggests a three stage approach to ensure best practice is followed when developing close to trees:

### A1.1 Stage 1: Survey Details and Notes

A ground level visual survey was undertaken. No climbed inspections or specialist decay detection were undertaken. Only trees with a stem diameter over 75mm, which lie within the site boundary or relatively close to it, were included.

Where applicable, trees with significant defects have been highlighted and appropriate remedial works have been recommended. However, this report should not be seen as a substitute for a full *Safety Survey* or *Management Plan* which are specifically designed to minimise risk and liability associated with responsibility for trees.

Wherever practicable dimensions were obtained using diameter tapes, logger's tapes, distometers and clinometers. Where obstacles prevent accurate measurement, dimensions are estimated. Trees on privately owned third party are surveyed from the best available vantage point and observations relating to the condition of these trees should be treated accordingly. All height measurements should be regarded as approximate.

Data is recorded for each tree and is presented in a Tree Data Schedule. Each tree is allocated a **Retention Category** according to its size, amenity value, condition and safe useful life expectancy. The categories are allocated independently of development proposals. Our interpretation of the Retention Categories is explained below:

#### A1.1.1 Retention Categories

**A Category:** Trees of high quality and amenity value. Usually, mature trees with a significant life expectancy which would enhance any development. Retention of these trees is strongly encouraged.

**B Category:** Trees of moderate quality and amenity value. Usually these are maturing trees or younger trees with exceptional form. Retention of these trees is desirable though the removal of occasional specimens may be acceptable.

**C Category:** Trees of low quality or small specimens with a relatively low amenity value. These trees are not considered to be a material planning constraint and their removal will generally be seen as acceptable in order to facilitate development.

**U Category:** Trees of such low quality that their removal is recommended regardless of development proposals.

Occasionally trees are borderline and do not fall neatly into one of the categories A, B or C. In such cases we apply a superscript (+/-) such that:

**C<sup>+</sup>** Indicates borderline C/B, though Category C is deemed to be most appropriate.

**B<sup>-</sup>** Indicates borderline C/B, though Category B is deemed to be most appropriate.



The British Standard suggests that each of the A, B and C categories may be further subdivided (A1, A2, A3, B1, B2, B3 etc) such that subcategory 1 denotes mainly arboricultural values, subcategory 2 denotes mainly landscape values and subcategory 3 denotes mainly cultural values (including conservation). Multiple subcategories may be used.

Our experience suggests that these subdivisions lack clarity and can be confusing. Within this report subcategories are **not** denoted. Where appropriate, the use of phrases such as 'Part of a formal group', or 'Has a high ecological value', or 'Offers good screening to the site' are incorporated into the observation section of the Tree Data Schedule. We believe this conveys all relevant landscape and cultural information without any confusion.

**Tree Constraints Plan (TCP).** This indicates the position, crown spread, Retention Category and Root Protection Area of each tree. It is used to inform where development may proceed without causing damage to trees.

**Root Protection Area (RPA).** This is the area around each tree likely to contain the majority of roots. It should ideally remain undisturbed to avoid a detrimental impact on tree health. For single stemmed trees it is calculated according to the formula "radius of RPA" = "12 x stem diameter". Where a tree has more than one stem, the equivalent-single-stem diameter is usually recorded. This is calculated by adding the squares of the stems and then finding the square root of this total. The radius of the Root Protection Area is then calculated by multiplying the equivalent-stem-diameter by 12.

**Shade Constraints.** The previous Standard (BS 5837 2005) suggested that shade constraints should be indicated on the TCP. These are denoted as a circle-segment drawn northwest to due east with a radius equal to the height of the tree. These do not represent the actual shade pattern which varies through the seasons. Rather, they indicate the area most shaded by the tree throughout the course of the year. Ideally habitable room windows should be located outside of these shade constraints. Where we consider it appropriate, we will include shade constraints information on our Impact Assessment Plan or Proposed Layout Plan.

## A1.2 Stage 2: Arboricultural Impact Assessment

After the initial survey and the production of the Tree Constraints Plan, arborists and designers are encouraged to work together to establish a design proposal with minimal impact on the high quality trees. An assessment should be made of all possible impacts including the impact that the trees may have upon the proposal. The arborist may recommend mitigation strategies to minimise these impacts and help achieve a more harmonious juxtaposition between buildings and trees.

## A1.3 Stage 3: Arboricultural Method Statement

This type of report specifies the measures necessary to protect trees against damage from construction activity. The Method Statement should be written in a manner that it may be conditioned and enforced by the local authority upon granting of planning permission. The site manager should be familiar with all aspects of the Method Statement and should ensure that all persons working on the site are aware of those aspects which appertain to their work. This includes service installation engineers and operators of plant machinery.



## Appendix 2: Explanation of Tree Data & Glossary

This section explains the terms used in the **Tree Data Schedule** (see Section 3 and Appendix 6).

### A2.1 General Observations

|                                 |                                                                                                                                                                                                                                                                                                                                       |
|---------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Numbering System:</b>        | Each item of vegetation has its own unique number prefixed by a letter such that T1=Tree 1, G2=Group 2, H3=Hedge 3 and W4=Woodland 4, S5=Shrub 5.                                                                                                                                                                                     |
| <b>Age Categories:</b>          |                                                                                                                                                                                                                                                                                                                                       |
| <b>Young</b>                    | Usually less than 10 years old.                                                                                                                                                                                                                                                                                                       |
| <b>Semi-Mature</b>              | Significant future growth to be expected, both in height and crown spread (typically below 30% of life expectancy).                                                                                                                                                                                                                   |
| <b>Early-Mature</b>             | Full height almost attained. Significant growth may be expected in terms of crown spread (typically 30-60% of life expectancy).                                                                                                                                                                                                       |
| <b>Mature</b>                   | Full height attained. Crown spread will increase but growth increments will be slight (typically 60% or more of life expectancy).                                                                                                                                                                                                     |
| <b>Veteran</b>                  | A level of maturity whereby significant management may be required in order to keep the tree in a safe condition.                                                                                                                                                                                                                     |
| <b>Over Mature</b>              | As for veteran except management is not considered worthwhile.                                                                                                                                                                                                                                                                        |
| <b>Species:</b>                 | Common names and Latin names are given.                                                                                                                                                                                                                                                                                               |
| <b>Height:</b>                  | Measured from ground level to the top of the crown.                                                                                                                                                                                                                                                                                   |
| <b>Stem Diameter:</b>           | Taken at 1.5m above ground level where possible. On multi-stemmed trees this measurement may be taken at ground level, though usually an indication of the number of stems and average diameter is given, e.g. 3 x 30cm.                                                                                                              |
| <b>Crown Height:</b>            | Measured from ground level to the height at which the main crown begins. Where the crown is unbalanced it is measured on the side deemed to be most relevant. This is usually the side facing the area of anticipated development.                                                                                                    |
| <b>Tree Diagram:</b>            | This scaled drawing is computer generated based on measurements taken for stem diameter, crown height and spread, and overall height. It is designed to help the reader rapidly assess the data. It is not an accurate representation of the form of the tree.                                                                        |
| <b>Crown Spread:</b>            | Measured N, E, S & W, taken from the centre of the stem and usually rounded up to the nearest metre.                                                                                                                                                                                                                                  |
| <b>Observations:</b>            | If a tree's position is considered to be relevant it will be commented upon (e.g. overhanging a children's play area). Tree form and pruning history are also recorded along with an account of any significant defects. Defects and descriptive terms are dealt with in more detail at the end of this section.                      |
| <b>Recommendations:</b>         | Usually based on any defects observed and intended to ensure that the tree is in an acceptable condition.                                                                                                                                                                                                                             |
| <b>Priority Scale:</b>          | Depending upon the threat posed by the tree, and the likelihood of failure, recommendations should be carried out according to the following priority scale:                                                                                                                                                                          |
| <b>Urgent</b>                   | To be carried out as soon as possible.                                                                                                                                                                                                                                                                                                |
| <b>Very High</b>                | To be carried out within 1 month.                                                                                                                                                                                                                                                                                                     |
| <b>High</b>                     | To be carried out within 3 months.                                                                                                                                                                                                                                                                                                    |
| <b>Moderate</b>                 | To be carried out within 1 year.                                                                                                                                                                                                                                                                                                      |
| <b>Low</b>                      | To be carried out within 3 years.                                                                                                                                                                                                                                                                                                     |
| <b>Inspection Frequency:</b>    | An interval of 6 months, 1 year, 1.5 years or 3 years is allocated before the next inspection is due. Wherever practical, consideration should be given to seasonal changes so that deciduous trees are not always surveyed in winter when they have no leaves, or in summer when leaves may obscure branches within the upper crown. |
| <b>Vigour:</b>                  | An indication of growth rate and the tree's ability to cope with stresses:                                                                                                                                                                                                                                                            |
| <b>High</b>                     | Having above average vigour.                                                                                                                                                                                                                                                                                                          |
| <b>Moderate</b>                 | Having average vigour.                                                                                                                                                                                                                                                                                                                |
| <b>Low</b>                      | Having below average vigour.                                                                                                                                                                                                                                                                                                          |
| <b>Very Low</b>                 | Tree is struggling to survive and may be dying.                                                                                                                                                                                                                                                                                       |
| <b>Physiological Condition:</b> |                                                                                                                                                                                                                                                                                                                                       |
| <b>Good</b>                     | Healthy and with no symptoms of significant disease.                                                                                                                                                                                                                                                                                  |
| <b>Fair</b>                     | Disease present or vigour is impaired.                                                                                                                                                                                                                                                                                                |
| <b>Poor</b>                     | Significant disease present or vigour is extremely low.                                                                                                                                                                                                                                                                               |
| <b>Very Poor</b>                | Tree is dying.                                                                                                                                                                                                                                                                                                                        |
| <b>Structural Condition:</b>    |                                                                                                                                                                                                                                                                                                                                       |
| <b>Good</b>                     | Having no significant structural defects.                                                                                                                                                                                                                                                                                             |
| <b>Fair</b>                     | Some defects observed though no high priority works are required.                                                                                                                                                                                                                                                                     |
| <b>Poor</b>                     | Significant defects found. Tree requires monitoring or remedial works.                                                                                                                                                                                                                                                                |
| <b>Very Poor</b>                | Major defects which will usually require significant remedial works or tree removal.                                                                                                                                                                                                                                                  |
| <b>Amenity Value:</b>           |                                                                                                                                                                                                                                                                                                                                       |
| <b>Very High</b>                | Exceptional specimen, observable by a large number of people.                                                                                                                                                                                                                                                                         |
| <b>High</b>                     | Attractive specimen, observable by a significant number of people.                                                                                                                                                                                                                                                                    |
| <b>Moderate</b>                 | One of the above factors is not applicable.                                                                                                                                                                                                                                                                                           |
| <b>Low</b>                      | Unattractive specimen or largely hidden from view.                                                                                                                                                                                                                                                                                    |
| <b>Life Expectancy:</b>         | The estimated number of years before the tree may require removal. Classified as (<10), (10 – 20), (20 – 40), or (40+).                                                                                                                                                                                                               |
| <b>Retention Category:</b>      | These are explained in detail in Appendix 1.                                                                                                                                                                                                                                                                                          |

### A2.2 Evaluation of Defects

Cavities, wounds, deadwood etc are all evaluated as follows:

|                    |                                                                                                                                                                  |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Major</b>       | Such that structural integrity is, or will become, compromised and the tree is, or will inevitably become, hazardous.                                            |
| <b>Significant</b> | A defect that may over time become a major defect, though not necessarily so. This will depend on the vigour of the tree and its ability to deal with decay etc. |
| <b>Minor</b>       | A defect that is not likely to compromise the tree's structural integrity.                                                                                       |



## General Glossary

|                         |                                                                                                                                                                                                                                                                                                                                                                               |
|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Adaptive growth         | In tree biomechanics, the process whereby wood formation is influenced both in quantity and quality by the action of gravitational forces and mechanical stresses on the cambial zone.                                                                                                                                                                                        |
| Aerobic                 | Conditions in which oxygen is freely available, or to biomechanical processes that depend on the presence of oxygen.                                                                                                                                                                                                                                                          |
| Anaerobic               | A condition marked by the absence of oxygen; Generally such areas are unsuitable for normal life and growth of plant tissues. These sites tend to be populated by bacteria capable of surviving low oxygen conditions often associated with Slime Flux.                                                                                                                       |
| Arboriculture           | The culture and management of trees as groups and individuals primarily for amenity and other non-forestry purposes.                                                                                                                                                                                                                                                          |
| Arborist                | A person possessing the technical competence through experience and related training to provide management of trees or other woody plants in a landscape setting. Generally involved with the development or management of trees for visual amenity or land management rather than the growth of trees for product or profit.                                                 |
| Barrier zone            | A layer within an annual increment of wood which contains abnormal xylem cells, laid down by the cambium in response to wounding or other trauma.                                                                                                                                                                                                                             |
| Body language           | In trees, the outward display of growth responses and or deformation in response to mechanical stress.                                                                                                                                                                                                                                                                        |
| Bole                    | Or Trunk, the main stem of a tree below its first major branch.                                                                                                                                                                                                                                                                                                               |
| Bracket                 | A type of fruiting body produced by various fungal species, plate like to hoof like in shape and often a one sided attachment to the wood or bark.                                                                                                                                                                                                                            |
| Branch bark ridge       | A ridged area located at the union of a branch to a trunk or stem.                                                                                                                                                                                                                                                                                                            |
| Branch Collar           | Trunk tissue that forms around the base of a branch between the main stem and the branch, or between a main branch and a lateral branch. As a branch decreases in vigour or begins to die, the collar usually becomes more pronounced and completely encircles the branch.                                                                                                    |
| Brown Rot               | Form of decay where cellulose is degraded, while lignin is only modified.                                                                                                                                                                                                                                                                                                     |
| Buttress Root           | Roots that emerge from the base of the tree stem, normally large and well developed that rapidly reduce in diameter to create the Root Plate this offers structural support for the tree. Buttress roots divide rapidly forming the connection between the stem and the transport roots.                                                                                      |
| Cabling Bracing         | Installing cables within the crown of a tree to prevent collapse.                                                                                                                                                                                                                                                                                                             |
| Callus                  | Undifferentiated cells often formed at the edges of recent injuries. This tissue quickly becomes differentiated, forming cells of the type characteristic of that position on the tree (e.g. forming wood, bark, roots, etc.) see wound response tissue.                                                                                                                      |
| Cambium                 | A thin layer of actively growing and dividing cells, located between the xylem (sapwood) and bark of a plant; the part responsible for radial growth of a tree stem or branch.                                                                                                                                                                                                |
| Canopy                  | The topmost layer of twigs and foliage in a woodland, tree or group of trees.                                                                                                                                                                                                                                                                                                 |
| Canker                  | A localised area of dead bark and cambium on a stem or branch, caused by fungal or bacterial organisms, characterised by woundwood development on the periphery. This may be annual or perennial.                                                                                                                                                                             |
| Cavity                  | An open and exposed area of wood, where the bark is missing and internal wood has been decayed and dissolved.                                                                                                                                                                                                                                                                 |
| Chlorotic               | Also Chlorosis. A condition of the plant marked by yellowing of normally green foliage, often indicating nutrient deficiency or plant dysfunction.                                                                                                                                                                                                                            |
| Clinometer              | Devices that measures vertical angles, and provides direct height measurements of objects by triangulation.                                                                                                                                                                                                                                                                   |
| Co-dominant stems/trunk | Are forked branches or trunks of nearly the same size in diameter and lacking a normal branch union.                                                                                                                                                                                                                                                                          |
| Compacted soils         | Soils in which the air-space (oxygen space) has been reduced or eliminated, reducing water infiltration and percolation, reducing root presence and inhibiting new root development.                                                                                                                                                                                          |
| Compartmentalisation    | The physiological process that creates the chemical and mechanical boundaries that act to limit the spread of disease and decay organisms.                                                                                                                                                                                                                                    |
| Compression Failure     | Localized buckling of fibres and other longitudinal elements produced by compression of wood along the grain; compression failures sometimes develop in standing trees.                                                                                                                                                                                                       |
| Compression Strength    | The ability of a material or structure to resist failure when subjected to compressive loading; measurable in trees using special drilling devices                                                                                                                                                                                                                            |
| Compression Wood        | Abnormal wood formed on the lower side of branches and curved stems, with physical properties different from normal wood.                                                                                                                                                                                                                                                     |
| Conservation Area       | In Great Britain, designated areas of architectural or historical interest, in which there are special procedures for planning applications. Additionally tree works cannot generally be undertaken without prior notification (Currently 6 weeks) to the relevant local planning authority. See also Tree Preservation Orders.                                               |
| Core Sample             | A sample of wood extracted from a trunk or branch, using an increment borer tool. The resulting core can be analysed for characteristics of growth, wood strength, structure, decay, and for species identification.                                                                                                                                                          |
| Crotch                  | The union of two or more branches; the auxiliary zone between branches.                                                                                                                                                                                                                                                                                                       |
| Crown                   | The upper canopy of a tree, including upper trunk, scaffold branches, secondary branches, stems and leaves.                                                                                                                                                                                                                                                                   |
| Crown lifting / raising | Crown Lift The removal of the lowest branches, usually to a given height. It allows more residual light and greater clearance underneath for vehicles etc.                                                                                                                                                                                                                    |
| Crown reduction         | The reduction of a tree's height or spread while preserving its natural shape.                                                                                                                                                                                                                                                                                                |
| Crown thinning          | The removal of some of the density of a tree's crown, usually 5-25% allowing more light through its canopy and reducing wind resistance.                                                                                                                                                                                                                                      |
| Deadwood (noun)         | Deadwood is often present within the crown or on the stems of trees. It may be an indication of ill health, however, it may also indicate natural growth processes. If a target is present beneath the tree, deadwood may fall and cause injury or damage and should be removed, otherwise deadwood can remain intact for conservation purposes (insects, fungi, birds etc.). |
| Deadwood (verb)         | The removal of dead branches from a tree's canopy, usually of a specified size (in diameter).                                                                                                                                                                                                                                                                                 |
| Decay                   | Progressive deterioration of organic tissues, usually caused by fungal or bacterial organisms, resulting in loss of cell structure, strength, and function. In wood, the loss of structural strength.                                                                                                                                                                         |
| Decay Detection         | The assessment of decay within a tree has been traditionally difficult, but recent advances have made it possible to achieve accurate representations of the internal section of a tree in both 2D and 3D, removing doubt over the condition of the tree and allowing accurate management decisions.                                                                          |
| Defect                  | In relation to tree hazards, any feature of a tree which detracts from the uniform distribution of mechanical stress, or which makes the tree mechanically unsuited to its environment.                                                                                                                                                                                       |
| Defoliation             | The losing of plants foliage.                                                                                                                                                                                                                                                                                                                                                 |
| Dieback                 | Progressive death of buds, twigs and branch tissues, on individual limbs resulting in Deadwood, or throughout the canopy,                                                                                                                                                                                                                                                     |



|                              |                                                                                                                                                                                                                                                                                                                                                                                      |
|------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                              | extreme cases can result in Stag Heading.                                                                                                                                                                                                                                                                                                                                            |
| <b>Dripline</b>              | A projected line on the ground that corresponds to the spread of branches in the canopy; the farthest spread of branches.                                                                                                                                                                                                                                                            |
| <b>Epicormic shoots</b>      | Fast growing, weakly attached shoots/branches that often grow as a response to stress factors upon a tree or branch removal.                                                                                                                                                                                                                                                         |
| <b>Failure</b>               | In connection with tree hazards, a partial or total fracture within the wood tissue or loss of cohesion between roots and soil. (In total failure affected parts will snap or tear away completely, Partial failure there is a crack or deformation, which results in an altered distribution of mechanical stress.                                                                  |
| <b>Feeder Roots</b>          | Fine fibrous Water and nutrient absorbing roots located in the outer root system.                                                                                                                                                                                                                                                                                                    |
| <b>Flush-Cut</b>             | In trees and shrubs, a pruning cut close to the parent stem, which removes the branch bark ridge.                                                                                                                                                                                                                                                                                    |
| <b>Foliage</b>               | The live leaves or needles of the tree; the plant part primarily responsible for photosynthesis.                                                                                                                                                                                                                                                                                     |
| <b>Formative pruning</b>     | The trimming of a tree to remove weaknesses and irregularities which may lead to problems. The formative pruning operation is aimed at reducing the potential for future weaknesses or problems within the tree's crown.                                                                                                                                                             |
| <b>Gall</b>                  | An abnormal, disorganized growth of plant tissues, caused by parasitic or infectious organisms such as insects, fungi, bacteria, or viruses.                                                                                                                                                                                                                                         |
| <b>Girdling</b>              | In woody plants, any form of damage that destroys the bark and / or the Cambium all the way around the stem, branch or root, normally resulting in death of the damaged section.                                                                                                                                                                                                     |
| <b>Girdling Root</b>         | In woody plants, a root that grows across the buttress, or across other roots, eventually causing constriction of the radial growth.                                                                                                                                                                                                                                                 |
| <b>Growth Increment</b>      | The incremental growth added as new annual ring develops each season over existing wood. This is seen as (growth) rings in cross-sections of wood.                                                                                                                                                                                                                                   |
| <b>Hazard beam</b>           | An upwardly curved branch in which strong internal stresses may occur without the compensatory formation of extra wood (longitudinal splitting may occur in some cases).                                                                                                                                                                                                             |
| <b>Heartwood</b>             | Inner non functioning tissues that provide structural support to trunk.                                                                                                                                                                                                                                                                                                              |
| <b>Heave</b>                 | In relation to shrinkable clay soils, expansion due to rewetting of a volume of soil previously subjected to the removal or water by plant / trees following felling or root severance. Also in relation to root growth, the lifting of pavements and other structures by radial expansion. Also in relation to tree stability, the lifting of one side of a wind rocked root plate. |
| <b>Herbicide</b>             | A chemical compound that causes the death of a plant.                                                                                                                                                                                                                                                                                                                                |
| <b>Included Bark</b>         | Bark that becomes embedded in a crotch between branch and trunk or between co-dominant stems, usually found in narrow or tight crotches, and causes a weak structure.                                                                                                                                                                                                                |
| <b>Increment Borer</b>       | A tool that cuts and extracts a narrow cylinder of wood from a tree for analysis of the wood tissue and growth increments.                                                                                                                                                                                                                                                           |
| <b>Leader</b>                | The primary terminal shoot or trunk of a tree.                                                                                                                                                                                                                                                                                                                                       |
| <b>Limb</b>                  | A large lateral branch growing from the main trunk or from another larger branch.                                                                                                                                                                                                                                                                                                    |
| <b>Lion Tailing</b>          | Often the result of poor pruning practices; the main leader or branches are largely devoid of side branches, growth is restricted to the end of branches and is likely to suffer damage through end loading.                                                                                                                                                                         |
| <b>Lopping</b>               | In trees, a general term that related to the removal of branches from a tree.                                                                                                                                                                                                                                                                                                        |
| <b>Monitoring</b>            | Due to the relative life span of trees in relation to our own, long-term monitoring provides a valuable insight to the health of trees, identifying decline and or stabilisation and or improvement.                                                                                                                                                                                 |
| <b>Mulch</b>                 | A material laid over the root system of a tree to help conserve moisture within the soil. Additionally it may help control the development of weeds close to the tree.                                                                                                                                                                                                               |
| <b>Mycelium</b>              | A mass of growing filaments (hyphae) formed by fungi.                                                                                                                                                                                                                                                                                                                                |
| <b>Mycorrhizae</b>           | The symbiotic relationship between roots and certain beneficial fungi. Mycorrhizae are the combined root / fungal growth.                                                                                                                                                                                                                                                            |
| <b>Occluding tissue</b>      | The general term of wood, cambium and bark that develop around the site of a wound on a woody plant                                                                                                                                                                                                                                                                                  |
| <b>Pathogen</b>              | A microorganism that causes diseases within another organism.                                                                                                                                                                                                                                                                                                                        |
| <b>Phloem</b>                | The principle conductive tissue that the products of Photosynthesis are transported around the plant                                                                                                                                                                                                                                                                                 |
| <b>Photosynthesis</b>        | The process were light energy is used to create energy (Carbohydrate) for use within the plant.                                                                                                                                                                                                                                                                                      |
| <b>Pollard</b>               | A term for a pollarded tree.                                                                                                                                                                                                                                                                                                                                                         |
| <b>Pollard head</b>          | The swollen section of branch / stem that forms behind the pollarding cut.                                                                                                                                                                                                                                                                                                           |
| <b>Pollarding</b>            | The complete or partial removal of the crown of a young tree so as to encourage the development of numerous branches either for amenity or historically as fodder, repeated management is required cyclically to maintain the feature                                                                                                                                                |
| <b>Prune or Pruning</b>      | Selective removal of woody plant parts of any size, using saws, Loppers, Secateurs, or other pruning tools.                                                                                                                                                                                                                                                                          |
| <b>Reaction Wood</b>         | Wood with distinctive anatomical characteristics, formed in parts of leaning or crooked stems and in branches to provide additional strength / support. In hardwoods, tension wood usually forms. In conifers, compression wood is usually found.                                                                                                                                    |
| <b>Reaction Zone</b>         | A zone normally darker than surrounding wood that denoted the boundary often a defensive one between functional sapwood and dysfunctional or decaying wood.                                                                                                                                                                                                                          |
| <b>Re-grading</b>            | The raising or lowering of a soil profile from its original grade.                                                                                                                                                                                                                                                                                                                   |
| <b>Remedial pruning</b>      | The removal of old stubs, deadwood, epicormic growth, rubbing or crossing branches and other unwanted items from the tree's crown.                                                                                                                                                                                                                                                   |
| <b>Resistograph</b>          | Invasive decay detection technique whereby the resistance offered by the timber to a spinning probe is measured and plotted.                                                                                                                                                                                                                                                         |
| <b>Rib</b>                   | In tree body language, a long narrow, axial protuberance which often over lays a crack.                                                                                                                                                                                                                                                                                              |
| <b>Ring Barking</b>          | Artificial Girdling of the stem, to result in the death of a tree. May be used in habitat creation were the retention of dead standing trees is required.                                                                                                                                                                                                                            |
| <b>Rod Bracing / Bolting</b> | Traditionally, this has relied upon the installation of steel rods or bolts through the stems or limbs, to reduce twisting or splitting of the wood. The installation of such features does require legal interpretation.                                                                                                                                                            |
| <b>Root Barriers</b>         | Both Buildings and services can benefit from the installation of root barriers to protect a soil volume from the ingress of roots.                                                                                                                                                                                                                                                   |
| <b>Root Collar</b>           | The basal area of the tree; transition zone from trunk to root. Also sometimes called trunk flare.                                                                                                                                                                                                                                                                                   |
| <b>Root Plate</b>            | The primary support area for the tree; an area of the root system close to the base that structurally anchors the tree to the soil.                                                                                                                                                                                                                                                  |
| <b>Root Rot</b>              | Either a general term for decay within the wood of the lower stem / buttress roots, or a disease in which the fine roots are killed.                                                                                                                                                                                                                                                 |
| <b>Root System</b>           | The portion of the tree containing the root organs, including buttress roots, transport roots, and fine absorbing roots; all underground parts of the tree.                                                                                                                                                                                                                          |
| <b>Root Zone</b>             | The area and volume of soil around the tree in which roots are expected. May extend to three or more times the branch spread of the tree, or several times the height of the tree.                                                                                                                                                                                                   |
| <b>Sail Area</b>             | That area or the tree subjected to wind load.                                                                                                                                                                                                                                                                                                                                        |



## Arboricultural Report to BS 5837: 2012 for: Stockwool

Crown Ref: 10524

Site: 9 Waverley Road, London

Author: Emma Hoyle

Date: 29<sup>th</sup> May 2020

|                                    |                                                                                                                                                                                                                                                                                                                                                                                       |
|------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Sapwood                            | Xylem wood tissue, usually light in colour, representing the outer growth rings of the wood. Usually living, reactive wood tissue, in a healthy tree. See heartwood                                                                                                                                                                                                                   |
| Scaffold limbs / scaffold Branches | The branches that from the main network framework of the crown of a tree.                                                                                                                                                                                                                                                                                                             |
| Senescent                          | A decline in growth and vigour due to age or stress factors.                                                                                                                                                                                                                                                                                                                          |
| Shrub                              | A woody plant that branches at or close to the ground level and so does not have a single stem.                                                                                                                                                                                                                                                                                       |
| Slime Flux                         | Relating to a toxic condition from the spreading of bacteria or their products from a source of infection; characterized by malodorous gases, or salt deposits upon the bark. If these products enter the sap stream, localised vessel necrosis can result, usually associated with anaerobic conditions.                                                                             |
| Soft Rot                           | A kind of wood decay, were a fungi degrades cellulose within the cell wall, without causing overall degradation.                                                                                                                                                                                                                                                                      |
| Soil Compaction                    | The compression of soil, causing a reduction of pore space and an increase in the density of the soil. Air is squeezed out and nutrients become locked. Tree roots cannot grow in compacted soil.                                                                                                                                                                                     |
| Sonic Decay Detection              | Non invasive method whereby sound waves are passed through the tree and the speed is measured. Slow speeds indicate decay and a tomography picture representing the inner stem is produced.                                                                                                                                                                                           |
| Stag Heading                       | In a tree, a state of dieback were dead branches protrude beyond the current living crown.                                                                                                                                                                                                                                                                                            |
| Stress                             | In plant physiology, conditions were one or more physiological functions Are not working within normal parameters.                                                                                                                                                                                                                                                                    |
| Stump Grinding                     | The removal of a tree stump using a specialist grinding machine.                                                                                                                                                                                                                                                                                                                      |
| Subsidence                         | In relation to vegetation, the removal of water by plant growth resulting in localised shrinkage in the soil volume.                                                                                                                                                                                                                                                                  |
| Sucker                             | Same as sprout.                                                                                                                                                                                                                                                                                                                                                                       |
| Suppressed                         | Trees which are dominated by surrounding vegetation and whose crown development is restricted from above.                                                                                                                                                                                                                                                                             |
| Systemic                           | Affecting the whole plant or organism. A systemic compound is carried throughout the entire plant to all parts through the vascular system.                                                                                                                                                                                                                                           |
| Target                             | Any person or object within reach of a falling tree or part of a tree that may be injured or damaged.                                                                                                                                                                                                                                                                                 |
| Target Pruning                     | The pruning of a branch were the wound affects only branch material, often result in a target shaped wound.                                                                                                                                                                                                                                                                           |
| Tension Wood                       | Reaction wood typically formed on the upper side of limbs or curved stems; characterized by lack of cell wall lignifications (higher ratios of cellulose to lignin).                                                                                                                                                                                                                  |
| Tight Union / Tight Crotch         | Also, narrow crotch. A crotch with a narrow angle between branches, often having included bark.                                                                                                                                                                                                                                                                                       |
| Tomography                         | The comparison of sound or stress waves through the tree allows the creation of a 2D or 3D representation of the internal structure of a stem or branch section and highlights areas of damage. Virtually non-injurious.                                                                                                                                                              |
| Topography                         | The configuration of surface features, including the vertical and horizontal relationships of the ground and other features.                                                                                                                                                                                                                                                          |
| Topping                            | Cutting large limbs back severely, without regard to form or habit of the tree. Cuts are usually made between lateral branch nodes. This practice is extremely injurious to trees, and promotes decay and structural weakness within the crown.                                                                                                                                       |
| Tree                               | A woody plant that typically has a single stem, at maturity has a height of a least 4 metres and a stem diameter at breast height of at least 75mm.                                                                                                                                                                                                                                   |
| Tree Preservation Order            | In Great Britain, an order made by the local planning authority, where consent must be gained before undertaking all but exempt works to a tree.                                                                                                                                                                                                                                      |
| Trunk Flare                        | The basal area of the trunk that flares or widens, and merges with the main roots. See root collar                                                                                                                                                                                                                                                                                    |
| Veteran Tree                       | Veteran trees are often found in large parks or estates and commonly affected by extensive decay or have been subject to extensive works. These trees are retained for historical importance and often pose greater risk than normal, which is generally justified. They need careful management and often propping or bracing to support them, some require fencing to limit access. |
| Vigour                             | Active, healthy growth of plants: ability to respond to stress factors.                                                                                                                                                                                                                                                                                                               |
| Visual Tree Assessment (VTA)       | An assessment of the mechanical condition of trees based upon their 'body language'. Trees are dynamic and respond to faults / decay / environmental factors in various ways, these responses can be indicative of structural integrity.                                                                                                                                              |
| Wetwood                            | An infection caused by bacteria living inside the plant tissues. The bacteria ferment the plant fluids, resulting in death of nearby cells, and often causing exudations of fluid from the bark, often referred to as a Slime Flux.                                                                                                                                                   |
| White Rot                          | A kind of wood decay were a fungi attacks the lignin within the wood matrix                                                                                                                                                                                                                                                                                                           |
| Wind loading                       | Forces placed upon tree canopy, branches, trunk and roots of a tree under windy conditions.                                                                                                                                                                                                                                                                                           |
| Wind Throw                         | The failure of a tree due to wind loading.                                                                                                                                                                                                                                                                                                                                            |
| Witches Broom                      | A deformed or unusual growth of twigs from adventitious buds, caused by insects, disease, or dieback of twigs and buds.                                                                                                                                                                                                                                                               |
| Wood                               | Secondary Xylem; the main structural support and water conducting tissue of trees and shrubs.                                                                                                                                                                                                                                                                                         |
| Wound Response Tissue              | Also Occluding Tissue, Wound Wood or Callus. Differentiated wood tissue that grows around the margins of a wound or injury.                                                                                                                                                                                                                                                           |
| Wound Wood                         | Wood with atypical features, formed in the vicinity of a wound and a term to describe the occluding tissues around a wound                                                                                                                                                                                                                                                            |
| Xylem                              | Plant tissues with special function of translocation of water and dissolved nutrients.                                                                                                                                                                                                                                                                                                |



## Appendix 3: Survey Methodology

Ground level visual surveys are carried out using the *Visual Tree Assessment* technique described by Mattheck and Broeler (1994) and endorsed by the Arboricultural Association (LANTRA Professional Tree Inspection course, 2007).

Structural condition is assessed by inspecting the stem and scaffold branches from all angles looking for weak branch junctions or symptoms of decay. Particular attention is paid to the stem-base. Cavities are explored using a metal probe in order to assess the extent of any decay. If this is not possible further inspection is recommended in the form of a climbed inspection or using specialist decay detection equipment.

The physiological condition is assessed by inspecting the stem, branches and foliage for symptoms of disease. The overall vigour of the tree is also taken into account.

Where significant defects are observed, recommendations are made according to a scale of priority in order to reduce the likelihood of structural failure. The position of the tree and its potential targets are taken into account.

Measurements are obtained using a diameter tape, clinometer, distometer and loggers tape. Where this is not practical measurements are estimated.

Some trees are surveyed as groups, though this is usually avoided close to areas likely to be developed.

Finally, a *Retention Category* is allocated as described in Appendix 1.1.1.



## Appendix 4: Author's Qualifications

### **Qualifications & Experience of Ivan Button N.C.H. (Arb), FDS (Arb), BSc (Hons), P.G.C.E., M. Arbor. A.**

Between 1983 and 1995 Ivan worked primarily within the construction industry and received training in a broad range of practical building skills and general construction principles. During this time he obtained a BSc (Hons) at Leeds University followed by a P.G.C.E at The University of Wales.

In 1995, Ivan obtained a NCH (Arboriculture) at the University of Lincoln and became a member of the Arboricultural Association. He then worked for an Arboricultural Consultancy for one year before establishing a tree surgery and landscaping business in 1998. In 2005 Ivan commenced full time employment with a leading Arboricultural Association approved consultancy and soon adopted a senior role responsible for five consultants.

He obtained a FDS in arboriculture at the University of Lancashire, which he passed with distinction and is now a Director and Principal Consultant of Crown Consultants Ltd. He is accredited as a LANTRA *Professional Tree Inspector*. A qualification produced in association with the Arboricultural Association and generally recognised as appropriate for all levels of tree inspection.

Ivan is a professional member of the Arboricultural Association, the International Society of Arboriculture and the Consulting Arborist Society

Ivan is trained and licensed in QTRA (Quantified Tree Risk Assessment). He has undertaken professional expert witness training provided by Bond Solon and has been registered as a Sweet and Maxwell Checked Expert Witness from 2008-2017, after which the service was no longer offered.

Throughout 2009 acted as the principal Tree Officer for Barnsley Metropolitan Borough Council.

Ivan has produced several hundred Arboricultural Reports for the purposes of Development, Safety, Management, Mortgage, Subsidence, Mitigation and Litigation.

### **Qualifications & Experience of Emma Hoyle FDS (Arboriculture), ED (Forestry & Arboriculture), M. Arbor. A.**

Emma is a qualified Arboricultural Consultant educated to Level 5 in Arboriculture at Askham Bryan College and is a professional member of the Arboricultural Association. She has worked for Crown Consultants since 2015 and has since written numerous reports relating to all aspects of arboriculture including; planning and development, vegetation related subsidence, tree preservation orders and tree risk assessment. Emma regularly attends seminars and events in order to keep abreast with current knowledge and best practise in Arboriculture.

Prior to becoming an arboricultural consultant, Emma worked for two reputable tree surgery firms from 2008 and became an NPTC Qualified tree surgeon after completing a Level 3 Extended Diploma in Forestry and Arboriculture at Askham Bryan College. Emma also has experience in other areas of arboriculture such as forest clearance, tree planting, tree maintenance and landscaping.

### **Qualifications & Experience of Joe Taylor - MArborA, FdSc (Arboriculture)**

Joe began his career in Arboriculture as a tree surgeon/climber. During his time as a tree surgeon, Joe has achieved City & Guilds NPTC qualifications in Chainsaw Maintenance and Cross Cutting, Tree Climbing and Rescue, Safe Use of Manually Fed Wood-chipper and Supporting Colleagues Undertaking Tree Related Operations.

Joe obtained a Foundation Degree in Arboriculture at Askham Bryan College in 2015 which he passed with merit. Joe is a professional member of the Arboricultural Association, the International Society of Arboriculture and the Royal Forestry Society and regularly attends industry related seminars in order to keep abreast of industry best practice.

Studying at Askham Bryan College reinforced Joe's passion for trees and drove his enthusiasm to learn more. Learning how trees interact with their surrounding environment and their importance within our urban and rural landscapes highlighted an interest in pursuing a career in consultancy.

Since working for Crown Consultants Joe has undertaken numerous surveys and produced numerous reports for the purpose of planning (BS 5837), tree condition surveys, subsidence risk assessments, root surveys and decay detection investigations.



PDF readers select page-width for detail & page-view for scrolling

Arboricultural Report to BS 5837: 2012 for: Stockwool

Crown Ref: 10524

Site: 9 Waverley Road, London

Author: Emma Hoyle

Date: 29<sup>th</sup> May 2020

## Appendix 5: Further Information

### Building Near Trees – General

National Joint Utilities Group publication # 10 (1995), *Guidelines for the Planning, Installation and Maintenance of Utility Services in Proximity to Trees*. Downloadable at [www.njug.demon.co.uk/pdf/NJUG%20Publication10.pdf](http://www.njug.demon.co.uk/pdf/NJUG%20Publication10.pdf)

NHBC Standards Chapter 4.2., *Trees and Buildings*.

Horticulture LINK project 212. (University of Cambridge, 2004), *Controlling Water Use of Trees to Alleviate Subsidence Risk*.

### Tree Planting and aftercare

See [www.trees.org.uk/leaflets.php#](http://www.trees.org.uk/leaflets.php#) for downloadable leaflets on selecting a garden tree, planting, aftercare and veteran tree management.

### British Standards

BS 5837: 2012. Trees in Relation to Design, Demolition and Construction – Recommendations.

Bs 3998: 2010. Recommendations for Tree Work.

BS 3936: 1992. Nursery Stock. Part 1: Specification for Trees and Shrubs.

BS 3936: 1992. Nursery Stock. Part 10: Specification for Groundcover Plants.

BS 4043: 1989. Transplanting Root-balled Trees.

BS 8004: 1986. Foundations.

BS 8103: 1995. Structural design of Low-Rise Buildings.

BS 8206: 1992. Lighting for Buildings.

BS 8545:2014. Trees: From nursery to independence in the landscape – Recommendations

BS 3882: 2007. Topsoil.

BS 4428: 1989. General Landscaping Operations (excluding hard surfaces).

### Permission to do Works to Protected Trees / Tree Law

Forestry Commission (Edinburgh, 2003), *Tree Felling – Getting Permission*. Country Services Division - Forestry Commission. Downloadable at [www.forestry.gov.uk/website/pdf.nsf/pdf/wgsfell.pdf/\\$FILE/wgsfell.pdf](http://www.forestry.gov.uk/website/pdf.nsf/pdf/wgsfell.pdf/$FILE/wgsfell.pdf)

Transport and the Regions (Department of the Environment, 2000), *Tree Preservation Orders, A Guide to the Law and Good Practice*. Downloadable at [www.communities.gov.uk/publications/planningandbuilding/tposguide](http://www.communities.gov.uk/publications/planningandbuilding/tposguide)

C. Mynors, *The Law of Trees, Forests and Hedgerows* (Sweet and Maxwell, London, 2002)

Communities and Local Government website with numerous downloadable documents, from: <http://www.communities.gov.uk/planningandbuilding/planning/treeshighhedges/>

### Lighting Levels

P.J. Littlefair, B.R.E. 209: *Site layout planning for daylight and sunlight A guide to good practice*. B.R.E. Bookshop, London.

British Standards Institution. Code of practice for day lighting. *British Standard BS 8206: Part 2* (1992).

Chartered Institution of Building Services Engineers. *Applications manual: Window Design* (London, 1987).

NBA Tectonics. A study of passive solar housing estate layout. *ETSU Report S-1126*. Harwell, Energy Technology Support Unit (1988).

I.P. Duncan; D. Hawkes, Passive solar design in non-domestic buildings. *ETSU Report S-1110*. Harwell, Energy Technology.

P. J. Littlefair, Measuring Daylight, *BRE Information Paper 23/93 f3.50*. (Advises on measuring daylight under the real sky or an artificial sky, allowing for the changing nature of sky light).

### High Hedges

Communities and Local Government website with numerous downloadable documents, from: <http://www.communities.gov.uk/planningandbuilding/planning/treeshighhedges/>

### Tree Specific Websites

[www.crowntrees.co.uk](http://www.crowntrees.co.uk)

Crown Consultants site containing useful information

[www.trees.org.uk](http://www.trees.org.uk)

Arboricultural Association

[www.rfs.co.uk](http://www.rfs.co.uk)

Royal Forestry Society of England, Wales and N. Ireland

[www.treehelp.info](http://www.treehelp.info)

The Tree Advice Trust

[www.woodland-trust.org.uk](http://www.woodland-trust.org.uk)

The Woodland Trust

[www.treecouncil.org.uk](http://www.treecouncil.org.uk)

The Tree Council



PDF readers select *page-width* for detail & *page-view* for scrolling

Arboricultural Report to BS 5837: 2012 for: Stockwool

Crown Ref: 10524

Site: 9 Waverley Road, London

Author: Emma Hoyle

Date: 29<sup>th</sup> May 2020

---

## Appendix 6: Tree Data Schedule and Site Plan(s)

The Tree Data Schedule and any drawings accompanying this report follow this page.  
They are also provided as separate documents for ease of printing and screen viewing.



| Reference<br>G = Group<br>H = Hedge | Age & Species                                                        | Height (m) | Crown Ht (m) | Diameter (cm) | Crown Spread (m)<br>N<br>W      E<br>S | Scaled Tree Diagram (m) | Notes                                                                                                                                                                                                                                                       | Recommendations<br>(Independent of any development proposals) |                    | Vigour                           | Amenity Value                       |
|-------------------------------------|----------------------------------------------------------------------|------------|--------------|---------------|----------------------------------------|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------|--------------------|----------------------------------|-------------------------------------|
|                                     |                                                                      |            |              |               |                                        |                         |                                                                                                                                                                                                                                                             | Priority                                                      | Inspect Freq (yrs) | Physiological Condition          | Life Expectancy (yrs)               |
|                                     |                                                                      |            |              |               |                                        |                         |                                                                                                                                                                                                                                                             |                                                               |                    | Structural Condition             | Retention Category                  |
| T1                                  | Mature<br><br><b>Purple Beech</b><br><br>Fagus sylvatica 'purpurea'. | 22         | 2            | 110 @ Base    | 8<br>9      9<br>9.5                   |                         | Form: Multi-stemmed at 2m with a well-formed crown.<br>History: Occasional pruning wounds due to crown lifting.<br>Defects: <b>Significant cavity forming at 2.5m above ground level to south.</b>                                                          | Inspect cavity for decay.                                     |                    | Moderate<br><br>Fair<br><br>Fair | High<br><br>20-40<br><br><b>A</b>   |
|                                     |                                                                      |            |              |               |                                        |                         | High                                                                                                                                                                                                                                                        | 1                                                             |                    |                                  |                                     |
| T2                                  | Semi-Mature<br><br><b>Yew</b><br><br>Taxus baccata.                  | 3.5        | 2            | 20            | 3<br>3      3<br>3                     |                         | Position: Situated on third party land.<br>Form: Single stemmed and vertical with a balanced crown.<br>History: No evidence of significant pruning.<br>Defects: <b>No significant defects observed.</b><br>Other: Limited inspection, dimensions estimated. | No action required.                                           |                    | High<br><br>Good<br><br>Good     | Low<br><br>40+<br><br><b>C</b>      |
|                                     |                                                                      |            |              |               |                                        |                         | n/a                                                                                                                                                                                                                                                         | 3                                                             |                    |                                  |                                     |
| T3                                  | Mature<br><br><b>Lime</b><br><br>Tilia sp.                           | 15         | 2            | 81            | 5<br>5.5      5<br>5.5                 |                         | Form: Single stemmed and vertical with a balanced crown.<br>History: No evidence of significant pruning.<br>Defects: <b>No significant defects observed.</b><br>Other: Epicormic shoots throughout stem & ivy prevented detailed inspection.                | Remove ivy and inspect stem for defects.                      |                    | Moderate<br><br>Fair<br><br>Fair | High<br><br>20-40<br><br><b>B</b>   |
|                                     |                                                                      |            |              |               |                                        |                         | Moderate                                                                                                                                                                                                                                                    | 1                                                             |                    |                                  |                                     |
| T4                                  | Early-Mature<br><br><b>Ash</b><br><br>Fraxinus excelsior.            | 15         | 6            | 49            | 6<br>6.5      5<br>7                   |                         | Form: Twin-stemmed at 6m with a balanced crown.<br>History: No evidence of significant pruning.<br>Defects: <b>No significant defects observed.</b>                                                                                                         | No action required.                                           |                    | Moderate<br><br>Good<br><br>Good | Moderate<br><br>40+<br><br><b>A</b> |
|                                     |                                                                      |            |              |               |                                        |                         | n/a                                                                                                                                                                                                                                                         | 3                                                             |                    |                                  |                                     |
| T5                                  | Semi-Mature<br><br><b>Ash</b><br><br>Fraxinus excelsior.             | 8          | 3.5          | 21            | 0.5<br>2      1<br>3                   |                         | Form: Single stemmed with a slight lean and an unbalanced crown.<br>History: No evidence of significant pruning.<br>Defects: <b>No significant defects observed.</b>                                                                                        | No action required.                                           |                    | High<br><br>Good<br><br>Good     | Low<br><br>20-40<br><br><b>C</b>    |
|                                     |                                                                      |            |              |               |                                        |                         | n/a                                                                                                                                                                                                                                                         | 3                                                             |                    |                                  |                                     |
| T6                                  | Semi-Mature<br><br><b>Holly</b><br><br>Ilex aquifolium.              | 5          | 1            | 26            | 3<br>3      3<br>3                     |                         | Form: Single stemmed and vertical with a balanced crown.<br>History: No evidence of significant pruning.<br>Defects: <b>No significant defects observed.</b>                                                                                                | No action required.                                           |                    | High<br><br>Good<br><br>Good     | Low<br><br>40+<br><br><b>C</b>      |
|                                     |                                                                      |            |              |               |                                        |                         | n/a                                                                                                                                                                                                                                                         | 3                                                             |                    |                                  |                                     |
| T7                                  | Early-Mature<br><br><b>Sycamore</b><br><br>Acer pseudoplatanus.      | 13         | 6            | 45            | 5<br>5      5<br>4                     |                         | Form: Single stemmed with a slight lean and an unbalanced crown.<br>History: No evidence of significant pruning.<br>Defects: <b>No significant defects observed.</b><br>Other: Ivy prevented detailed inspection. Limited inspection, dimensions estimated. | Remove ivy and inspect stem for defects.                      |                    | Moderate<br><br>Good<br><br>Fair | Low<br><br>40+<br><br><b>B</b>      |
|                                     |                                                                      |            |              |               |                                        |                         | Moderate                                                                                                                                                                                                                                                    | 3                                                             |                    |                                  |                                     |

| Reference<br>G = Group<br>H = Hedge | Age & Species                                                             | Height (m) | Crown Ht (m) | Diameter (cm) | Crown Spread (m)<br>N<br>W      E<br>S | Scaled Tree Diagram (m)                                                             | Notes                                                                                                                                                                                                                                                                         | Recommendations<br>(Independent of any development proposals) |                    | Vigour                                     | Amenity Value                      |
|-------------------------------------|---------------------------------------------------------------------------|------------|--------------|---------------|----------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------|--------------------|--------------------------------------------|------------------------------------|
|                                     |                                                                           |            |              |               |                                        |                                                                                     |                                                                                                                                                                                                                                                                               | Priority                                                      | Inspect Freq (yrs) | Physiological Condition                    | Life Expectancy (yrs)              |
|                                     |                                                                           |            |              |               |                                        |                                                                                     |                                                                                                                                                                                                                                                                               |                                                               |                    | Structural Condition                       | Retention Category                 |
| T8                                  | Semi-Mature<br><br><b>London Plane</b><br><br>Platanus x hispanica.       | 12         | 3            | 43            | 4<br>2      7<br>6                     |    | Form: Single stemmed with a slight lean and an unbalanced crown.<br>History: No evidence of significant pruning.<br>Defects: <b>Cavity observed where secondary stem has torn out in the past.</b>                                                                            | Inspect cavity for decay.                                     |                    | Moderate<br><br>Good<br><br>Fair           | Low<br><br>20-40<br><br><b>B -</b> |
|                                     |                                                                           |            |              |               |                                        |                                                                                     |                                                                                                                                                                                                                                                                               | Moderate                                                      | 3                  |                                            |                                    |
| G9                                  | Semi-Mature<br><br><b>Ash</b><br><br>Fraxinus excelsior.                  | av<br>12   | av<br>2      | av<br>20      | av<br>2.5<br>2.5<br>2.5 each           |    | Form: Four close growing specimens.<br>History: No evidence of significant pruning.<br>Defects: <b>No significant defects observed.</b>                                                                                                                                       | No action required.                                           |                    | High<br><br>Good<br><br>Good               | Low<br><br>40+<br><br><b>B -</b>   |
|                                     |                                                                           |            |              |               |                                        |                                                                                     |                                                                                                                                                                                                                                                                               | n/a                                                           | 3                  |                                            |                                    |
| T10                                 | Semi-Mature<br><br><b>Ash</b><br><br>Fraxinus excelsior.                  | 12         | 6            | 25            | 3<br>1.5      5<br>3                   |    | Form: Single stemmed and leaning with an unbalanced crown.<br>History: No evidence of significant pruning.<br>Defects: <b>No significant defects observed.</b><br>Other: Stem leans over boundary fence and wraps around 3 sides of the stem of T11.                          | No action required.                                           |                    | High<br><br>Good<br><br>Good               | Low<br><br>40+<br><br><b>C</b>     |
|                                     |                                                                           |            |              |               |                                        |                                                                                     |                                                                                                                                                                                                                                                                               | n/a                                                           | 3                  |                                            |                                    |
| T11                                 | Semi-Mature<br><br><b>Lawson Cypress</b><br><br>Chamaecyparis lawsoniana. | 7          | 2            | 30            | 4<br>4      4<br>4                     |    | Position: Situated on third party land.<br>Form: Single stemmed and vertical with a balanced crown.<br>History: No evidence of significant pruning.<br>Defects: <b>No significant defects observed.</b><br>Other: Stem of T10 wraps around stem in 3 places.                  | No action required.                                           |                    | High<br><br>Good<br><br>Good               | Low<br><br>40+<br><br><b>C</b>     |
|                                     |                                                                           |            |              |               |                                        |                                                                                     |                                                                                                                                                                                                                                                                               | n/a                                                           | 3                  |                                            |                                    |
| T12                                 | <b>Dead</b><br><br><b>Pear</b><br><br>Pyrus sp.                           | 5          | 2            | 22            | 0.5<br>2      1.5<br>1.5               |  | Form: Dead specimen.                                                                                                                                                                                                                                                          | Remove.                                                       |                    | Dead<br><br><b>Dead</b><br><br><b>Dead</b> | Dead<br><br>Dead<br><br><b>U</b>   |
|                                     |                                                                           |            |              |               |                                        |                                                                                     |                                                                                                                                                                                                                                                                               | Moderate                                                      | N/A                |                                            |                                    |
| T13                                 | Early-Mature<br><br><b>Elder</b><br><br>Sambucus nigra.                   | 5          | 3            | 21            | 2.5<br>1.5      0.5<br>0.5             |  | Form: Twin-stemmed at 1m with an unbalanced crown.<br>History: No evidence of significant pruning.<br>Defects: <b>Decay tp multiple branches and scattered dead twigs throughout.</b><br>Other: Poor specimen. Recorded stem diameter is equivalent for 2 stems (17cm, 12cm). | No action required.                                           |                    | Low<br><br>Poor<br><br>Fair                | Low<br><br><10<br><br><b>C</b>     |
|                                     |                                                                           |            |              |               |                                        |                                                                                     |                                                                                                                                                                                                                                                                               | n/a                                                           | 3                  |                                            |                                    |
| T14                                 | Mature<br><br><b>False Acacia</b><br><br>Robinia pseudoacacia.            | 14         | 4            | 85            | 6.5<br>3      4<br>4                   |  | Position: Situated on third party land.<br>Form: Twin-stemmed at 3m with an unbalanced crown.<br>History: Central stem reduced back to main fork.<br>Defects: <b>No significant defects observed.</b><br>Other: Limited inspection, dimensions estimated.                     | No action required.                                           |                    | Low<br><br>Poor<br><br>Fair                | Low<br><br>10-20<br><br><b>C +</b> |
|                                     |                                                                           |            |              |               |                                        |                                                                                     |                                                                                                                                                                                                                                                                               | n/a                                                           | 3                  |                                            |                                    |

| Reference<br>G = Group<br>H = Hedge | Age & Species                                                       | Height (m) | Crown Ht (m) | Diameter (cm) | Crown Spread (m)<br>N<br>W      E<br>S | Scaled Tree Diagram (m)                                                           | Notes                                                                                                                                                                                                                                                           | Recommendations<br>(Independent of any development proposals) |                    | Vigour                  | Amenity Value         |
|-------------------------------------|---------------------------------------------------------------------|------------|--------------|---------------|----------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------|--------------------|-------------------------|-----------------------|
|                                     |                                                                     |            |              |               |                                        |                                                                                   |                                                                                                                                                                                                                                                                 | Priority                                                      | Inspect Freq (yrs) | Physiological Condition | Life Expectancy (yrs) |
|                                     |                                                                     |            |              |               |                                        |                                                                                   |                                                                                                                                                                                                                                                                 |                                                               |                    | Structural Condition    | Retention Category    |
| H15                                 | Early-Mature<br><br>Yew<br><br>Taxus baccata.                       | 7          | 1.5          | 40            | 3<br><br>3<br><br>3                    |  | Position: Situated on third party land.<br>Form: Vertical hedgerow.<br>History: Topped at 7m.<br>Defects: No significant defects observed.<br>Other: Limited inspection, dimensions estimated.                                                                  | No action required.                                           |                    | High                    | Low                   |
|                                     | n/a                                                                 |            |              |               |                                        |                                                                                   |                                                                                                                                                                                                                                                                 | 3                                                             | Good<br><br>Good   | 40+<br><br>C            |                       |
| T16                                 | Early-Mature<br><br>Purple Beech<br><br>Fagus sylvatica 'purpurea'. | 10         | 4            | 55            | 4<br><br>5.5<br><br>5                  |  | Position: Situated on third party land.<br>Form: Single stemmed with a slight lean and an unbalanced crown.<br>History: Central stem reduce to a height of 7m.<br>Defects: No significant defects observed.<br>Other: Limited inspection, dimensions estimated. | No action required.                                           |                    | Moderate                | Low                   |
|                                     | n/a                                                                 |            |              |               |                                        |                                                                                   |                                                                                                                                                                                                                                                                 | 3                                                             | Good<br><br>Fair   | 20-40<br><br>B -        |                       |
| T17                                 | Mature<br><br>Lime<br><br>Tilia sp.                                 | 20         | 2            | 104           | 6.5<br><br>5.5<br><br>6<br><br>6       |  | Form: Multi-stemmed at 7m with a balanced crown.<br>History: No evidence of significant pruning.<br>Defects: No significant defects observed.<br>Other: Ivy prevented detailed inspection. Dense canopy.                                                        | Remedial prune and remove ivy and inspect stem for defects.   |                    | Moderate                | High                  |
|                                     | High                                                                |            |              |               |                                        |                                                                                   |                                                                                                                                                                                                                                                                 | 1.5                                                           | Fair<br><br>Fair   | 20-40<br><br>B          |                       |



See the accompanying report  
for more photographs



| Tree Ref. | Species        | Height (m) | Root Protection Area |                |            |
|-----------|----------------|------------|----------------------|----------------|------------|
|           |                |            | Radius (m)           | m <sup>2</sup> | Square (m) |
| 1         | Yew            | 22         | 11.0                 | 380            | 19.5       |
| 2         | Pine           | 35         | 2.4                  | 18             | 3.3        |
| 3         | Lime           | 15         | 9.7                  | 297            | 17.2       |
| 4         | Ash            | 15         | 5.9                  | 109            | 10.4       |
| 5         | Ash            | 8          | 2.5                  | 20             | 4.5        |
| 6         | Holly          | 5          | 3.1                  | 31             | 5.5        |
| 7         | Sycamore       | 13         | 5.4                  | 92             | 9.6        |
| 8         | London Plane   | 12         | 5.2                  | 84             | 9.1        |
| 9         | Ash            | 12         | 2.4                  | 18             | 4.3        |
| 10        | Ash            | 12         | 3.0                  | 28             | 5.3        |
| 11        | Lawson Cypress | 7          | 3.6                  | 41             | 6.4        |
| 12        | Pear           | 5          | 2.6                  | 22             | 4.7        |
| 13        | Elder          | 5          | 2.5                  | 20             | 4.5        |
| 14        | Faise Acacia   | 14         | 10.2                 | 327            | 18.1       |
| 15        | Yew            | 7          | 8.1                  | 72             | 8.5        |
| 16        | Purple Beech   | 10         | 6.6                  | 137            | 17.1       |
| 17        | Lime           | 20         | 12.5                 | 489            | 22.1       |