

FREE UK DELIVERY



SITE SURVEYS



10 YEAR GUARANTEE




INSTALLATION SERVICE



MADE IN BRITAIN

TWO TIER CYCLE RACK

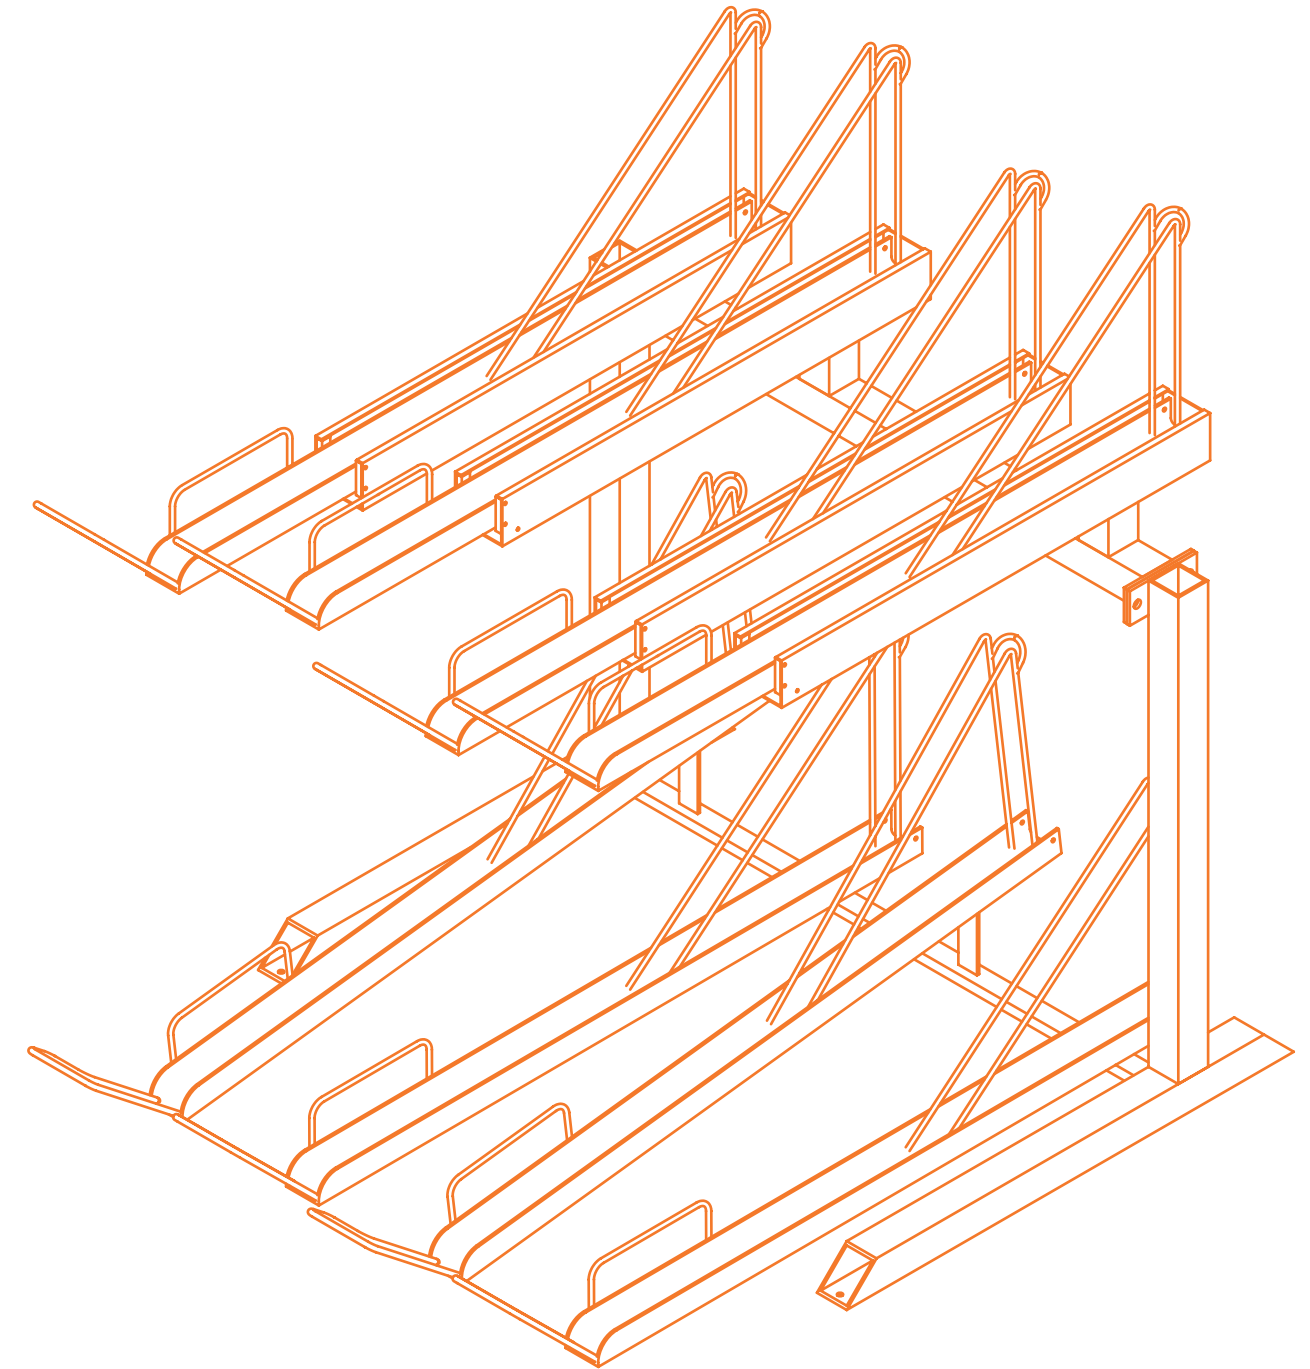

THE
BIKE STORAGE
COMPANY
SPECIFICATION DOCUMENT


0800 246 1723
www.thebikestoragecompany.co.uk
hello@thebikestoragecompany.co.uk
Marina Studios, Harbour Yard, London, SW10 0XD
Registered in England No. 9189322.

TWO TIER CYCLE RACK


Phone No: 0800 246 1723
Website: www.thebikestoragecompany.co.uk




TOP

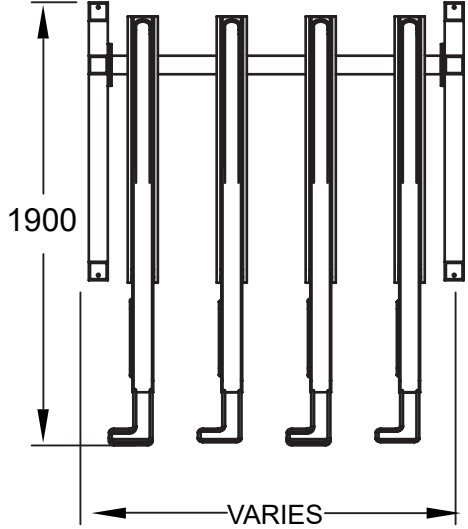

SIDE

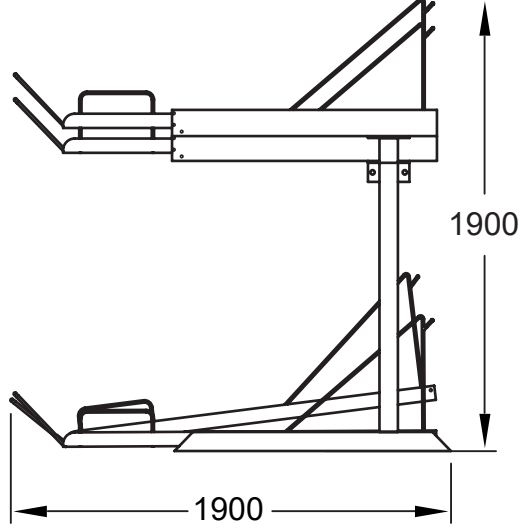

FRONT

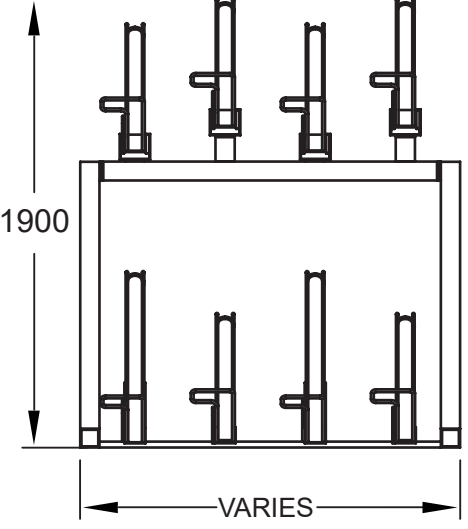

SUMMARY:

The Two Tier Bike Rack is the ultimate for achieving excellent space saving bike storage whilst ensuring a usable system for your users. Offering superb usability and exceptional value it has become the bike rack of choice for any area requiring high density bike storage such as stations, universities, shopping centres, car park and offices. The Two Tier Bike Rack accommodates all types of bicycles which are securely supported in the tyre channel. The rack also offers high security as both the wheels and the frame are able to be locked to the rack. BREEAM Compliant.

FEATURES:

- UK Manufactured
- Hot Dipped Galvanised to BS EN ISO 1461:2011
- Minimum height required 2500mm
- Counterbalance lifting mechanism
- Allows for both the wheels and the frame to be locked to the rack
- Code for Sustainable Homes compliant and BREEAM Compliant
- 375mm spacing between racks and a staggered height design allows for great utilisation of space whilst allowing easy access to bikes
- Single or Back-to-Back versions available
- Manufactured against your dimensions and room layout at no extra cost
- Full site visit and layout design provided free of charge
- Free delivery

OPTIONAL EXTRAS:

- Easy Grip Red Handle
- Gas assisted upper level
- Lower level channels (rack is provided as standard with sheffield hoops for lower level)
- Integrated back to back channel arrangement
- Powdercoating (excluding inner channel)



SpecifiedBy





POTENTIAL LAYOUTS



Install Requirements

- Rack to rack aisle width: 1300mm
- Rack to wall aisle width: 1300mm
- Centre of rack leg to wall tolerance: 300mm
- Minimum ceiling height: 2500mm


SPACING REQUIREMENTS

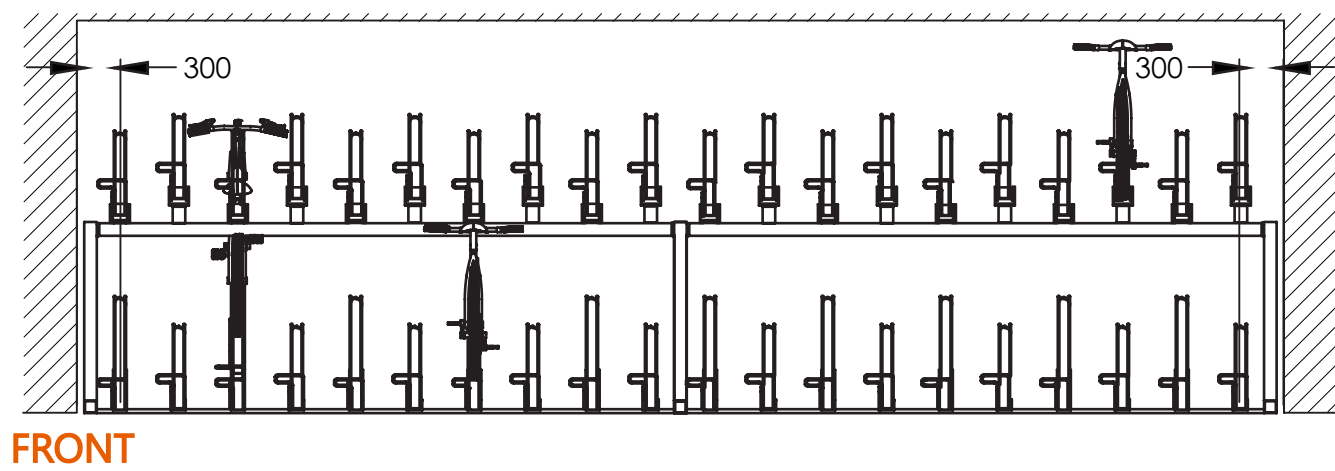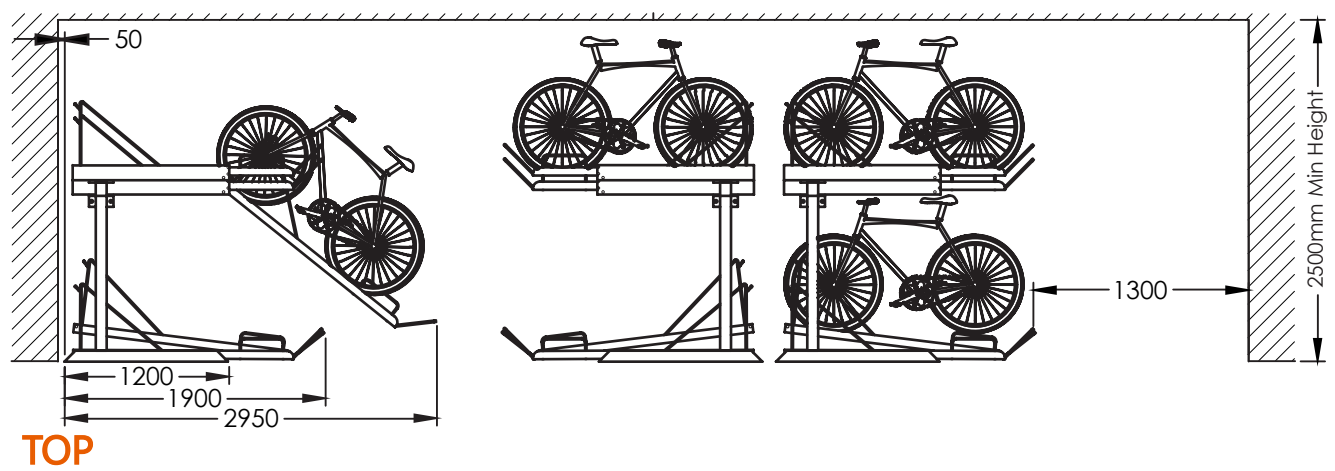


LAYOUT 1

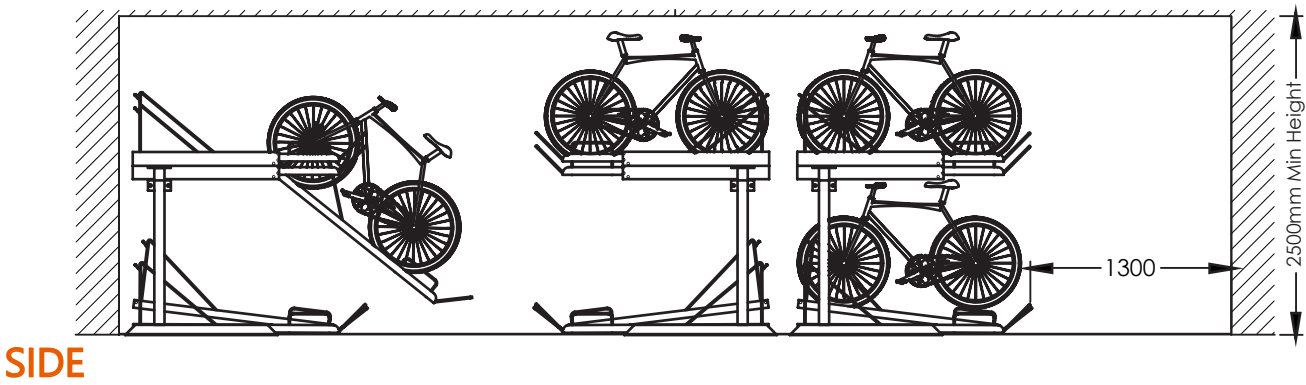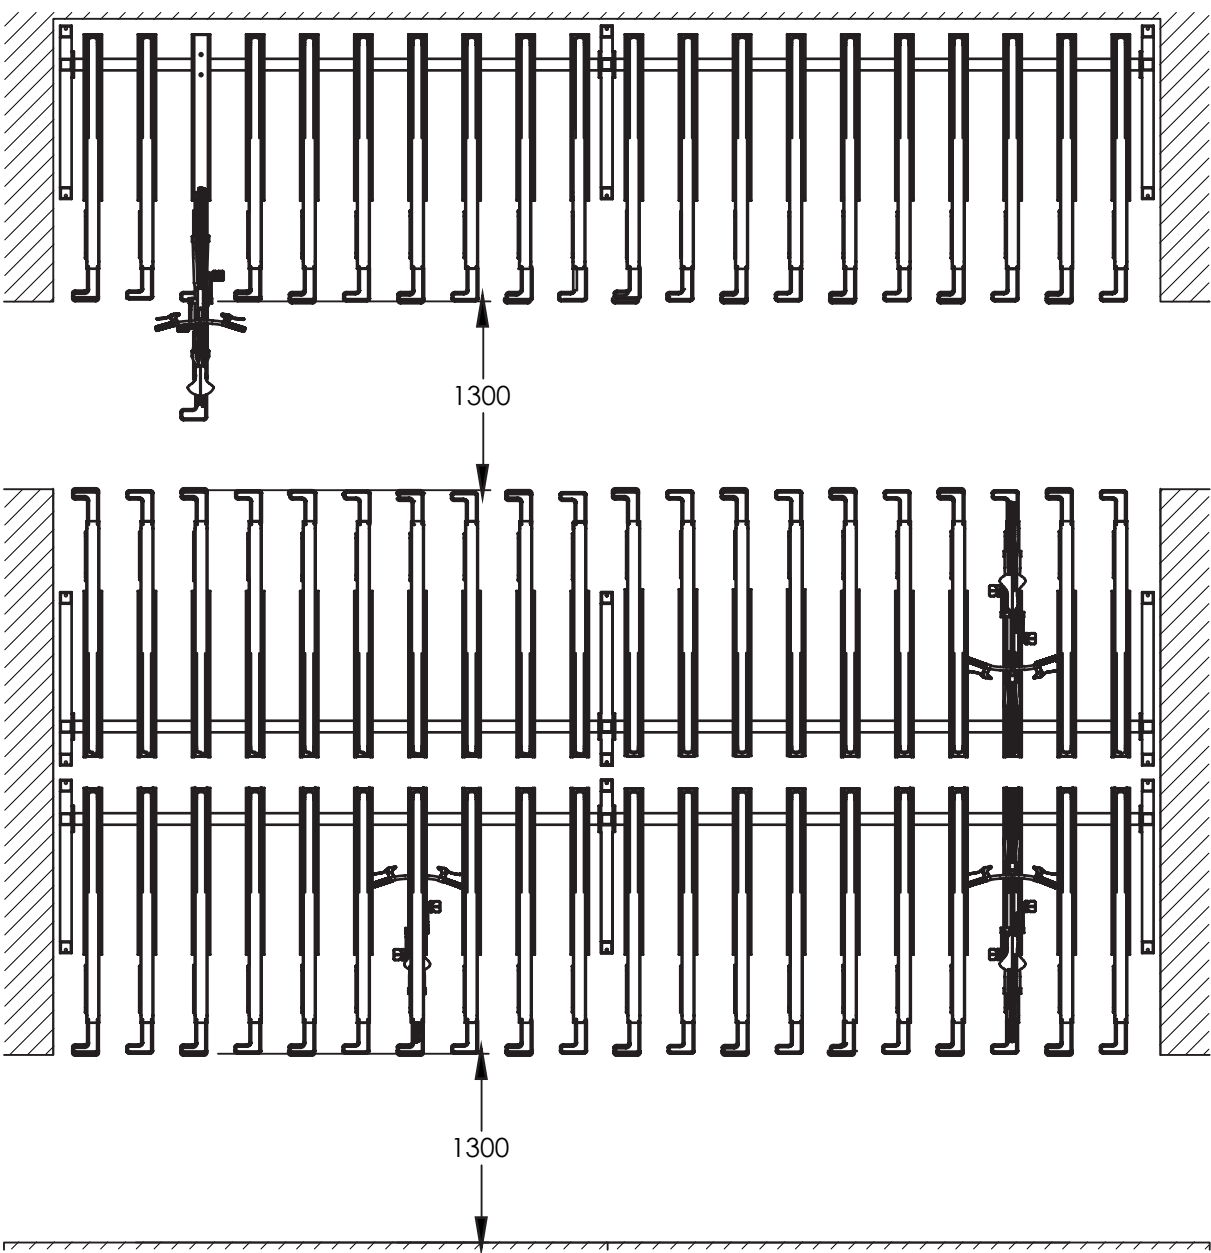

LAYOUT 2

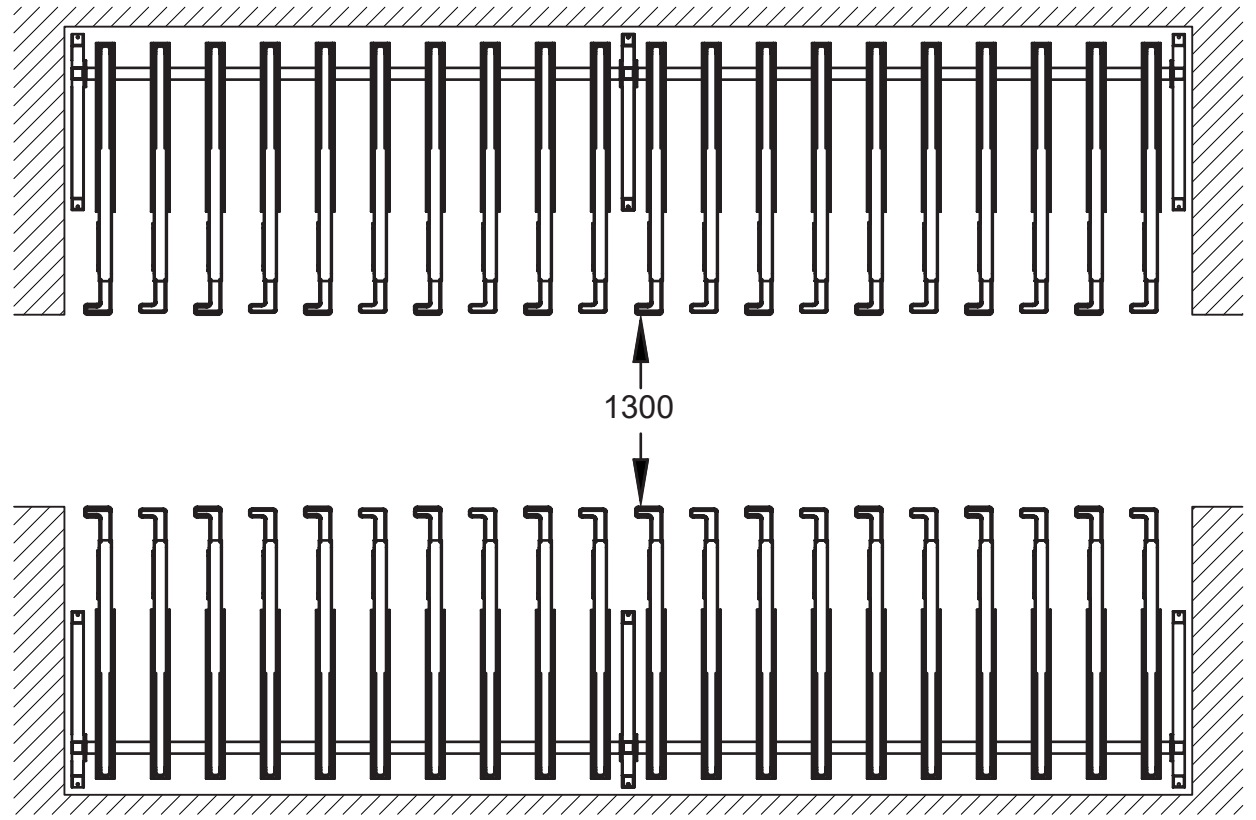


TOP

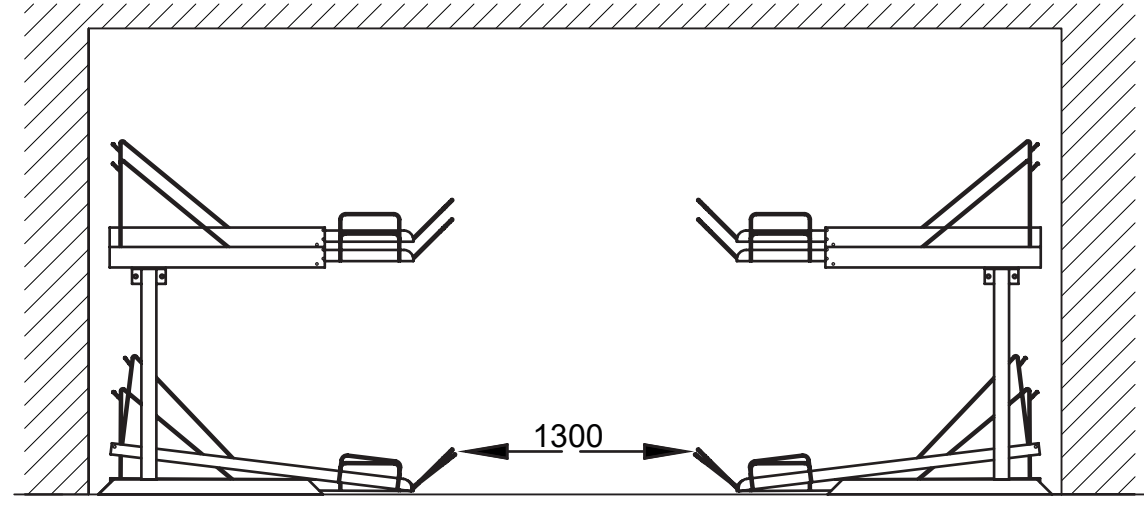


SIDE

LAYOUT 3

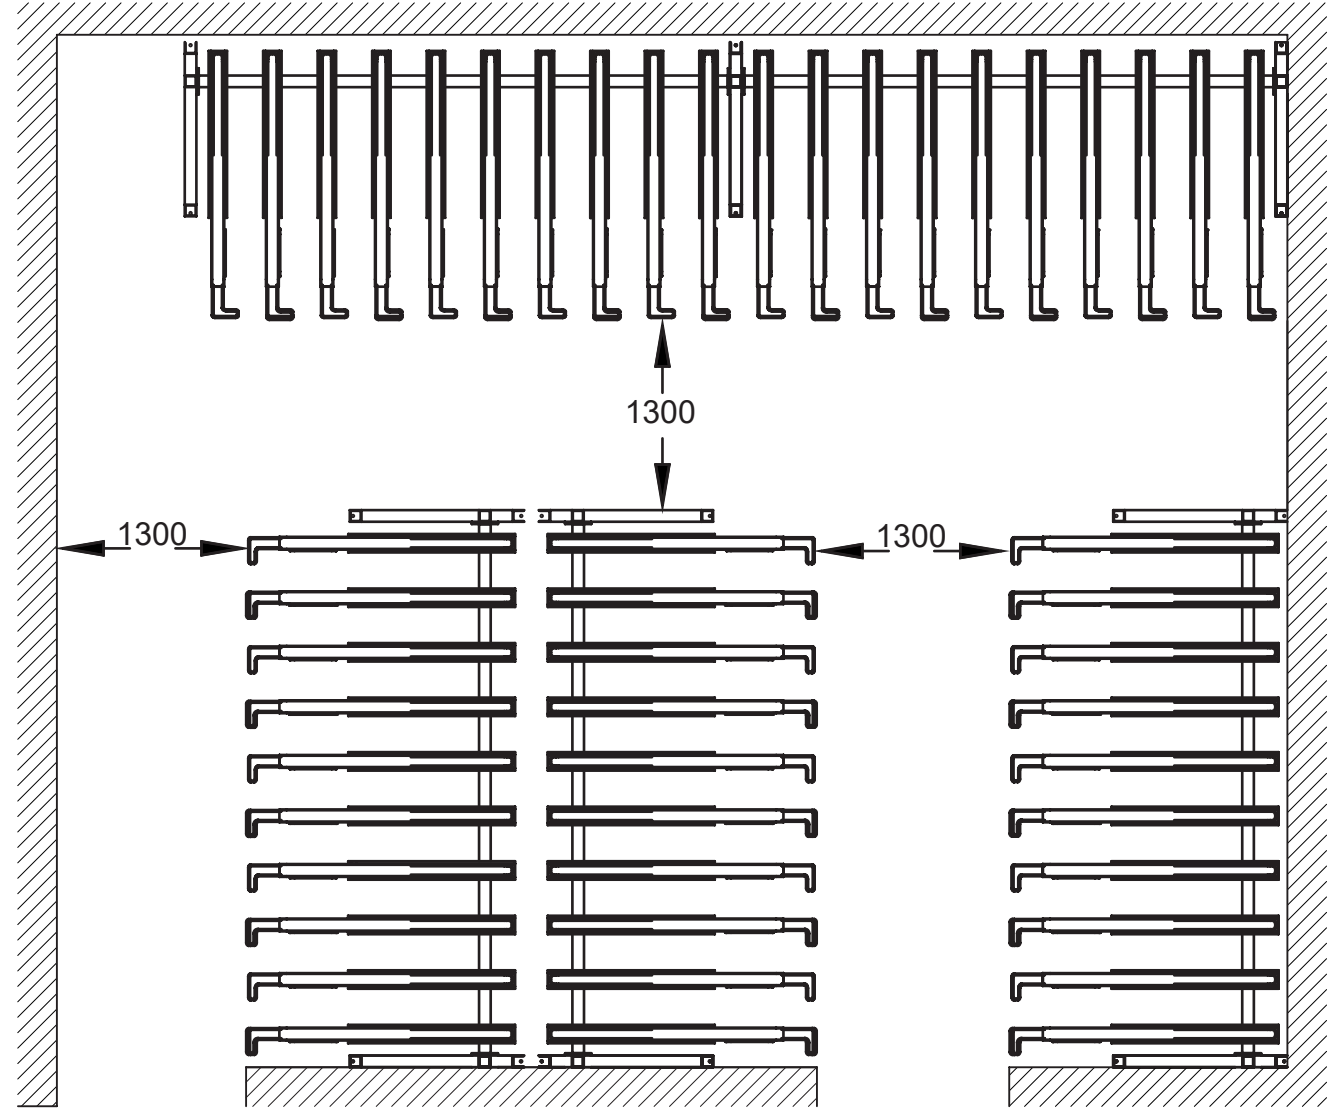

TOP

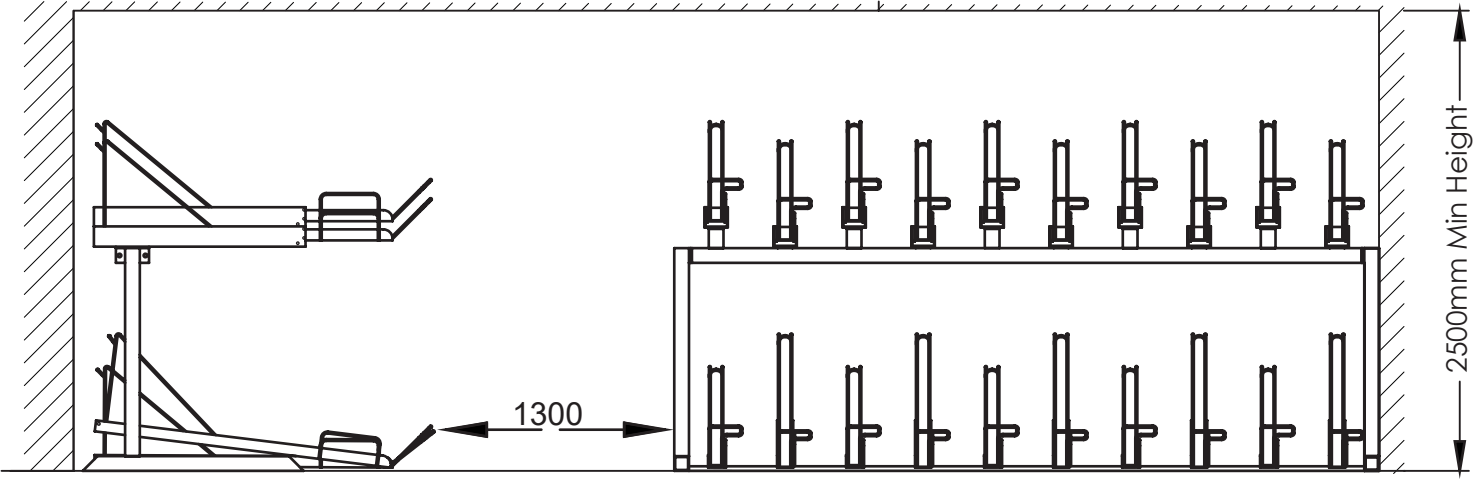

SIDE