
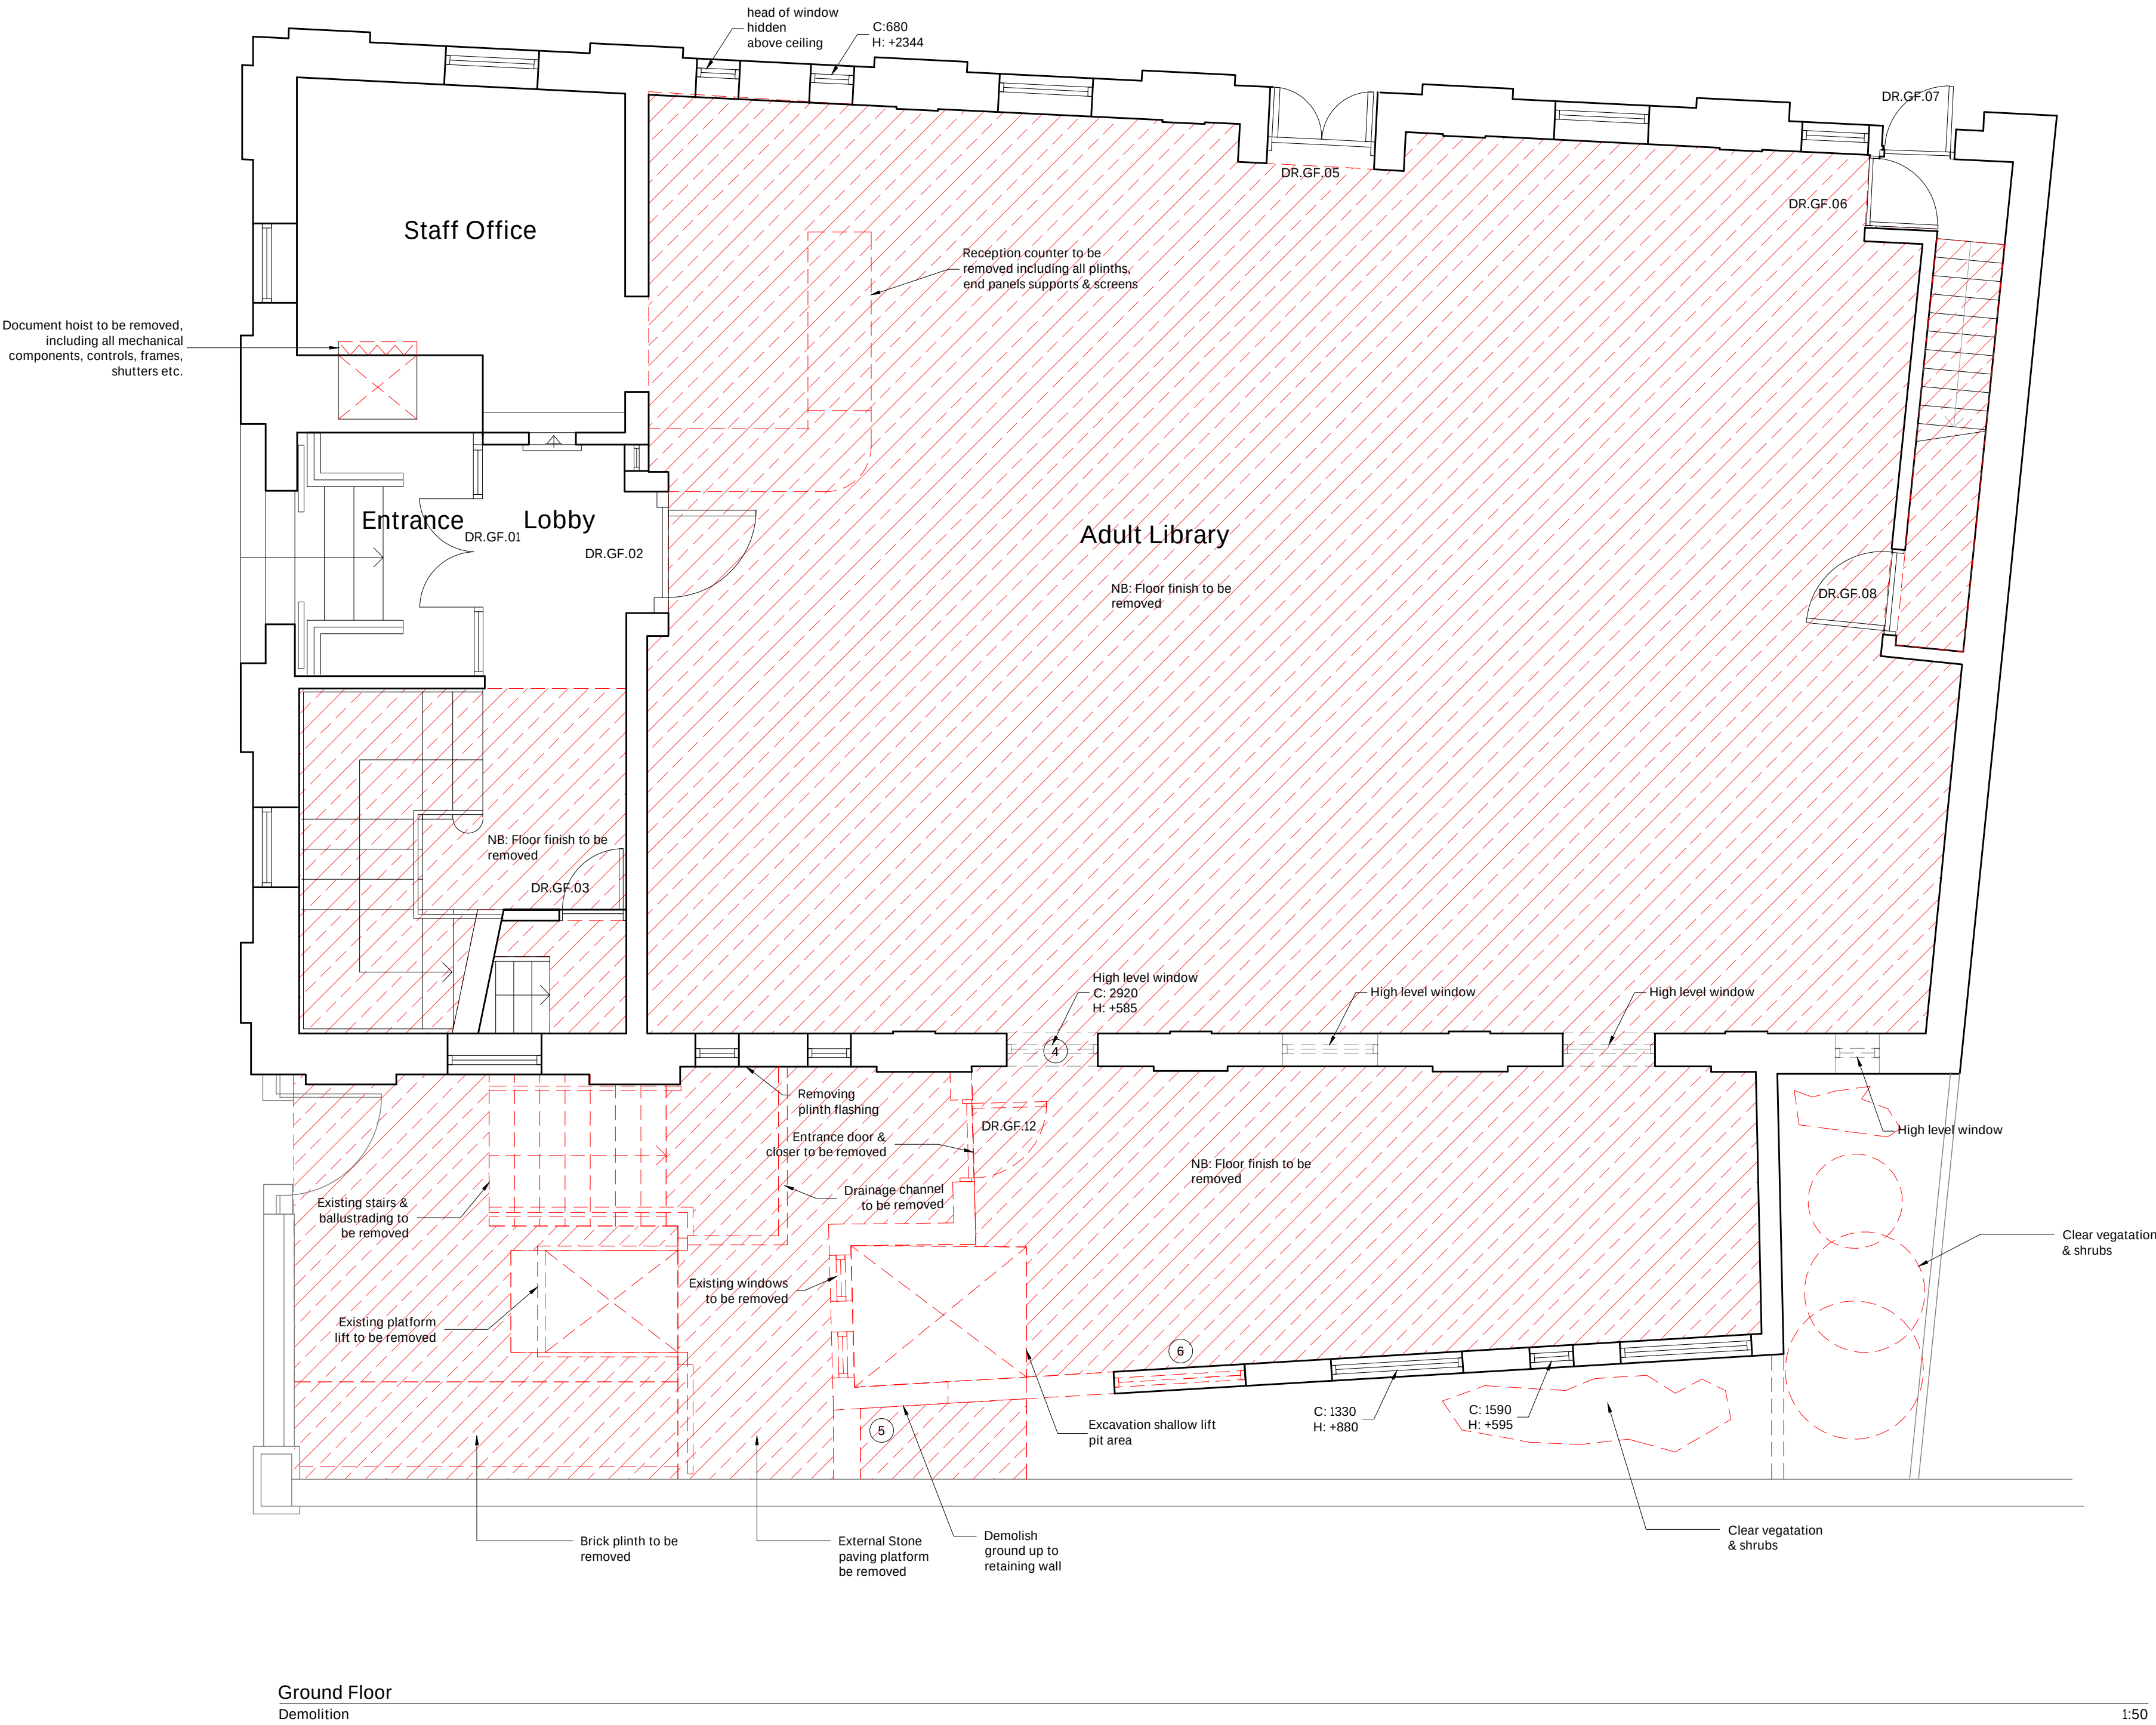


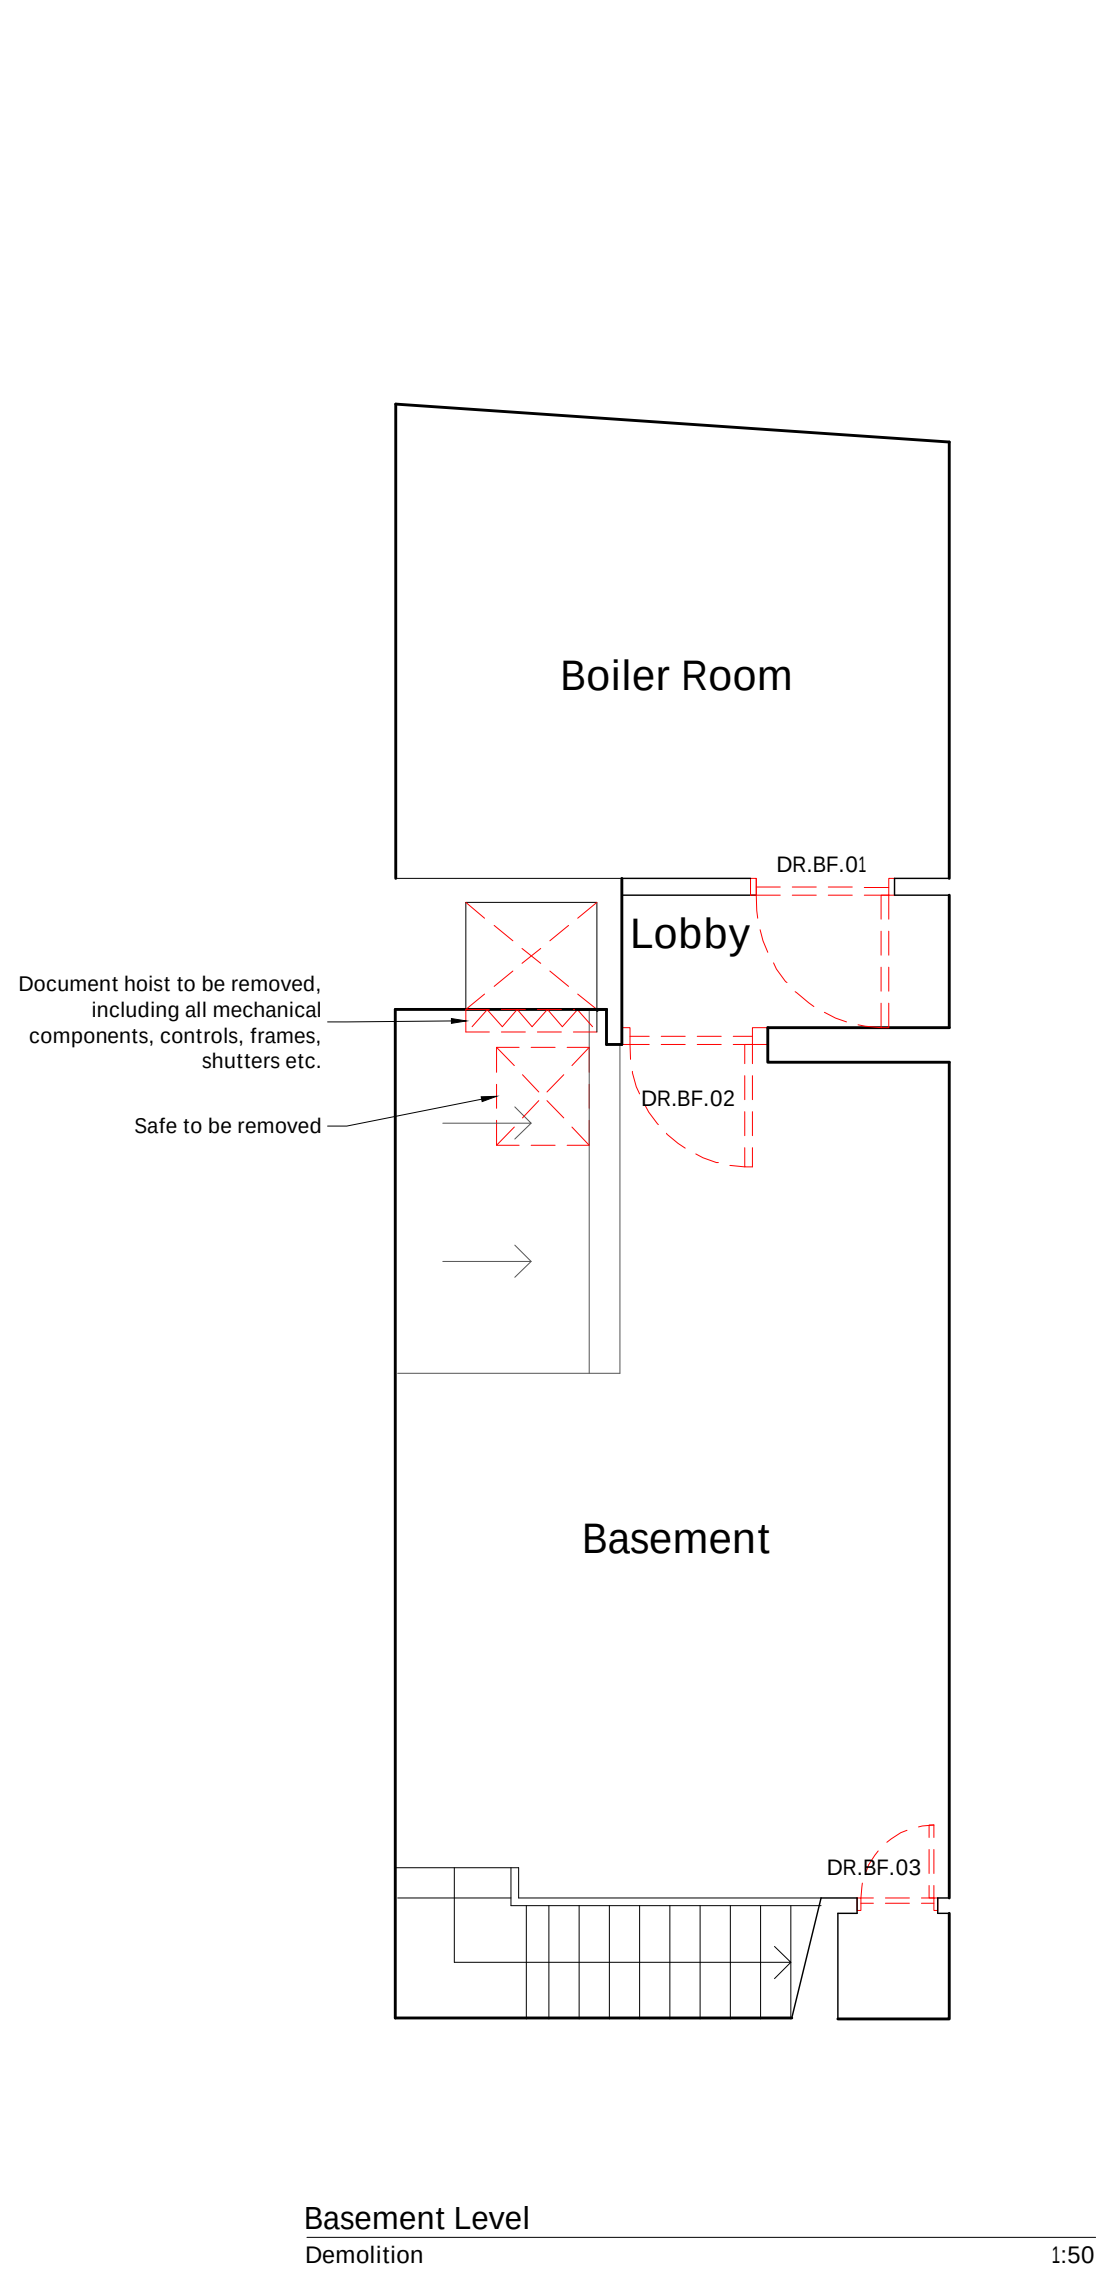

KEY:	
	Structure to be removed
	Doors to be removed
	Floor covering to be removed

BL & GL LEVEL KEY		
REF	DESCRIPTION	CLAUSE
1.	All stripping out to be in accordance with schedule of work & NBS C20 Specification. Refer to Mechanical & Electrical specification and drawings for removal of services	C20
2.	Make good all disturbed areas on completion of strip out to prepare ahead of the new works described separately and leave ready for new finishes etc.	C20
3.	The client will remove all loose furniture and wall mounted display boards prior to the start of the works.	C20
4.	Existing opening to be made good ready to receive new door and finishes.	C20
5.	Excavate earth beside the existing wall to level of new entrance to allow installation of new glazed extension and side steps	C20
6.	Window to be removed and replaced by a smaller one. Refer to SE spec	C20
7.	Asbestos impacted by works are to be removed by the client prior to commencement	C20

P03	High level windows and cill and head heights added	08/11/22	SP
P02	Issued for Tender	14/10/22	SP
P01	Issued for Tender	30/09/22	SP

rev.	description	date	chkd.
------	-------------	------	-------

client : London Borough of Haringey

project : Library Enhancement Works
Muswell Hill Library
Queen's Av, Muswell Hill. London. N10 3PF

drawing title :

Demolitions Plans
Basement & Ground

FulkersBaileyRussell

london | brighton | bristol | leeds | reading | manchester
info@fulkers.co.uk // www.fulkers.co.uk // 020 3735 5792

drawn: CK chkd: AK date: Aug 2022

proj no : 21.3453 scale: 1:50@A1

identifier : 3453-FBR-A1-ZZ-DR-A-120

status: D2 (Tender) rev no: P03