



ARBORICULTURAL IMPACT ASSESSMENT REPORT FOR:

2 Courtenay Avenue
London
N6 4LP

INSTRUCTING PARTY:

Private Client c/o Wolff Architects Ltd
16 Lambton Place
Notting Hill
London W11 2SH

REPORT PREPARED BY

David Gardner
MSc MArborA
&
Adam Hollis
MSc ARB MICFor FArbor A MRICS C Env

Ref: WFA/2CNY/AIA/02a

Date: 29th November 2022

The content and format of this report are for the exclusive use of the client in planning. It may not be sold, lent, hired out or divulged to any third party, not directly involved in the subject matter without Landmark Trees' written consent.

Web: www.landmarktrees.co.uk
e-mail: info@landmarktrees.co.uk
Tel: 0207 851 4544

London Office: Holden House, 4th Floor, 57 Rathbone Place London W1T 1JU

Registered Office: 15 Abbey Road, Oxford OX2 0AD

Landmark Trees is the trading name of Landmark trees Ltd. Registered in Wales. Reg No. 3882076



PART 1: MAIN TEXT

Section	Content	Page N°
1.0	SUMMARY	3
2.0	INTRODUCTION	4
3.0	SITE CHARACTERISTICS	8
4.0	DEVELOPMENT CONSTRAINTS	13
5.0	TABLE OF IMPACTS	16
6.0	ARBORICULTURAL IMPLICATIONS	18
7.0	CONCLUSION	26
8.0	RECOMMENDATIONS	27
9.0	COMPLIANCE	30
10.0	REFERENCES	31

PART 2 - APPENDICES

APPENDIX 1	Survey Data	34
APPENDIX 2	Recommended Tree Works	40
APPENDIX 3	Recommended Tree Works to Facilitate Development	42
APPENDIX 4	Trees for Urban Sites	44

PART 3 - PLANS

PLAN 1	Tree Constraints Plan	46
PLAN 2	Impact Assessment Plan(s)	48
PLAN 3	Outline Tree Protection Plan	52

DOCUMENT HISTORY

Revision	Status	Comments	Date
Rev 0	DRAFT	For Internal Review (Client / Design Team)	25/11/22
Rev 01a	Approved	For External Issue (Planning Application)	29/11/2022

1. SUMMARY

- 1.1 The proposal includes the construction of a replacement dwelling should be replaced with the proposed remodeling and extension of the existing dwelling.
- 1.2 There are 30 trees on the property and adjoining land outside of the application boundary that are within close proximity to the development and need to be assessed. These are judged mostly moderate and low-quality trees, but with a number of poor-quality trees, T3 and T15 in particular, requiring prompt attention regardless of development.
- 1.3 The report has assessed the impacts of the development proposals and concludes there would be at most a low impact on the resource: a small portion of trees will be removed or pruned to facilitate construction. Those removed have more collective than individual specimen value, such that their loss could be mitigated with new planting, bringing its own benefits to a relatively unmanaged resource. Similarly, though pruning here is to serve development, if undertaken to best practice, the scale envisaged should not be altogether untoward in an occupied site.
- 1.4 Whilst the default position is that structures be located outside the Root Protection Area* (RPA) of trees to be retained, there are some modest encroachments that could not be avoided in the design of the scheme. The report has demonstrated that the tree(s) can remain viable and that the area lost to encroachment can be compensated for elsewhere, contiguous with the RPA; the report also proposes a series of mitigation measures to improve the soil environment that is used by the tree for growth. Net impacts are assessed therefore as being low.
- 1.5 Notwithstanding the above assurances, the report sets out a series of recommendations prior and during construction that will ensure impacts to trees are minimised. These are detailed in sections 6.3 and 8 of this report.
- 1.6 In conclusion, the proposal, through following the above recommendations, will have no, or very limited, impact on the existing trees and is acceptable.

* British Standards Institute: Trees in relation to design, demolition and construction BS 5837: 2012 HMSO, London

2. INTRODUCTION

2.1 Terms of Reference

2.1.1 Wolff Architects Ltd instructed Landmark Trees (LT) to prepare this Arboricultural Impact Assessment on behalf of their client, to support a full planning application submitted to the London Borough of Haringey ('LBH').

2.1.2 The demolition of the existing building and construction of a replacement dwelling which will include a basement level. The replacement dwelling largely occupies the same footprint as existing should be replaced with the proposals include extension and refurbishment works to the existing dwelling to create a large family home.

The proposals include:

- *Demolition to the rear elevation of the property at ground, first, and second floor levels,*
- *Demolition of existing pitched roof to be replaced by a new pitched roof with clay tiles to match the existing. New dormer windows are also proposed to replace the existing.*
- *Alterations to fenestration including replacement timber framed sash double glazed windows and doors.*
- *Internal remodeling to suit revised layout, including partial basement extension*
- *Remodeling and relevelling of external terrace areas at side and rear of property*


2.1.3 This report will assess the impact on trees and their constraints, identified in our survey. Although the proposals were known at the time of the survey, Landmark Trees endeavour to survey each site blind, working from a topographical survey, wherever possible, with the constraints plan informing their evolution. The purpose of the report is to provide guidance on how trees and other vegetation can be integrated into construction and development design schemes. The overall aim is to ensure the protection of amenity by trees which are appropriate for retention.

2.1.4 Trees are a material consideration for a Local Planning Authority when determining planning applications, whether or not they are afforded the statutory protection of a Tree Preservation Order or Conservation Area. British Standard BS 5837:2012 Trees in Relation to Design, Demolition and Construction sets out the principles and procedures to be applied to achieve a harmonious and sustainable relationship between trees and new developments. The Standard recommends a sequence of activities (see Fig.1 overleaf) that starts in the initial feasibility and design phase (RIBA Stage 2 'Concept Design' as defined in 2012) with a survey to qualify and quantify the trees on site and establish the arboricultural constraints to development (above- and below-ground) to inform the design in an iterative process, and continues with an assessment of the arboricultural impacts of the final design and measures to mitigate such impacts should they be negative. Detailed technical specifications for mitigation and protection measures are devised in the design phase that follows (RIBA Stage 3-4 'Developed and Technical design'), and the

sequence ends with the Implementation and Aftercare phase (RIBA Stages 5-7) with the implementation of those measures once planning permission is granted, guided by Arboricultural Method Statements (RIBA Stage 4-5, 'Technical Design and Construction') and professional guidance where appropriate.

- 2.1.5 This report is produced to support the Design Team to the Scheme Design Approvals stage in the process chart overleaf.

Figure 1 The design and construction process and tree care

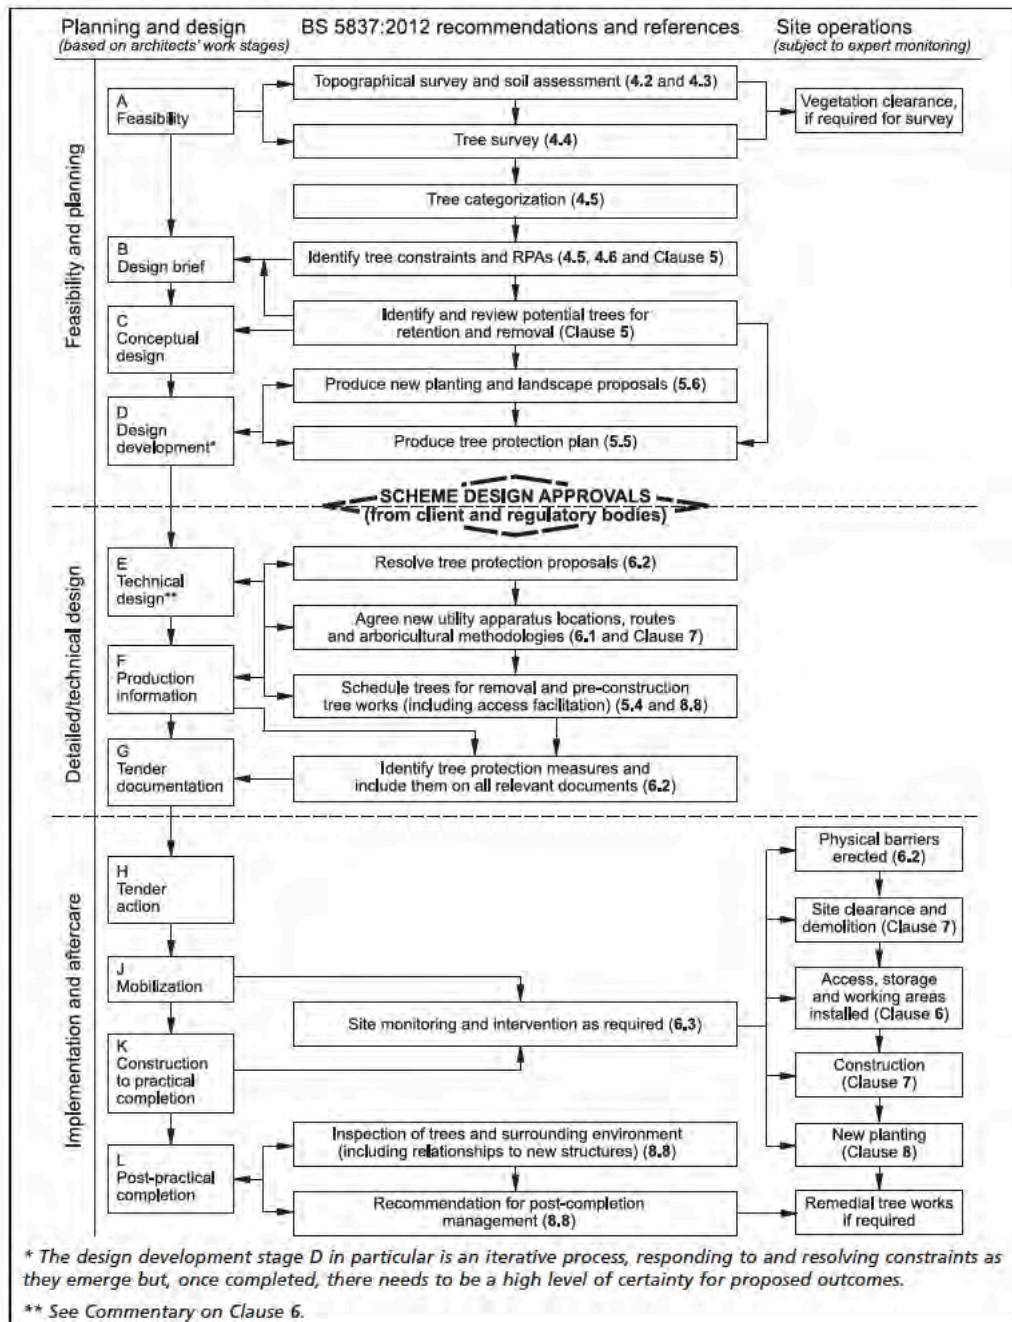

2.2 Drawings Supplied

- 2.2.1 The drawings supplied by the client and relied upon by Landmark Trees in the formulation of our survey plans are:

Existing site survey: 3943

Proposals: 2176-Set of Proposed Drawings

2.3 Scope & Limitations of Survey

- 2.3.1 As Landmark Trees' (LT) arboricultural consultant, Ross Gamblin MArborA surveyed the trees on site on the 1st of November 2022, recording relevant qualitative data in order to assess both their suitability for retention and their constraints upon the site, in accordance with British Standard 5837:2012 Trees in relation to design, demolition and construction – Recommendations [BS5837:2012].
- 2.3.2 Our survey of the trees, the soils and any other factors, is of a preliminary nature. The trees were SURVEYED on the basis of the Visual Tree Assessment method expounded by Mattheck and Breloer (The Body Language of Trees, DoE booklet Research for Amenity Trees No. 4, 1994). LT have not taken any samples for analysis and the trees were not climbed but inspected from ground level.
- 2.3.3 The results of the tree survey, including material constraints arising from existing trees that merit retention, should be used (along with any other relevant baseline data) to inform feasibility studies and design options. For this reason, the tree survey should be completed and made available to designers prior to and/or independently of any specific proposals for development. Tree surveys undertaken after a detailed design has been prepared can identify significant conflicts: in such cases, the nature of and need for the proposed development should be set against the quality and values of affected trees. The extent to which the design can be modified to accommodate those trees meriting retention should be carefully considered. Where proposed development is subject to planning control, a tree survey should be regarded as an important part of the evidence base underpinning the design and access statement
- 2.3.4 A tree survey is generally considered invalid in planning terms after 2 years, but changes in tree condition may occur at any time, particularly after acute (e.g. storm events) or prolonged (e.g. drought) environmental stresses or injuries (e.g. root severance). Routine surveys at different times of the year and within two - three years of each other (subject to the incidence of the above stresses) are recommended for the health and safety management of trees remote from highways or busy access routes. Annual surveys are recommended for the latter.
- 2.3.5 The survey does not cover the arrangements that may be required in connection with the laying or removal of underground services.

2.4 Survey Data & Report Layout

- 2.4.1 Detailed records of individual trees are given in the survey schedule in Appendix 1. General husbandry recommendations are distinguished at Appendix 2 from minimum requirements to facilitate development which form part of the planning application at Appendix 3. The former may still be relevant to providing a safe site of work, of course. Planning considerations notwithstanding, we trust these necessary recommendations are passed on to relevant parties with due diligence and the trees to be managed appropriately.
- 2.4.2 A site plan identifying the surveyed trees, based on the Instructing Party's drawings / topographical survey is provided in Part 3 of this report. This plan also serves as the Tree Constraints Plan with the theoretical Recommended Protection Areas (RPA's), tree canopies and shade constraints, (from BS5837: 2012) overlain onto it. These constraints are then overlain in turn onto the Instructing Party's proposals to create a second Arboricultural Impact Assessment Plan in Part 3. Physical measures required to protect trees during construction are then added to this plan to create an Outline Tree Protection Plan. General observations, discussion, conclusions and recommendations follow, below.

3. SITE CHARACTERISTICS

3.1 Property Description & Planning Context



Photograph 1: Aerial view of application site (Source: Google Maps)

- 3.1.1 This property is located approximately midway along Courtenay Avenue which is accessed from Hampstead Lane. It comprises a detached mansion house with existing lower ground floor / basement and extensive gardens.
- 3.1.2 The site is relatively level although there are a number of level changes throughout it.
- 3.1.3 LB Haringey's website indicates the site is included within an Area Tree Preservation Order made in 2014 and we also understand that the site stands within the Highgate Conservation Area, both designations affect the subject trees: it is a criminal offence to prune, damage or fell such trees without permission from the local authority.
- 3.1.4 Relevant local planning policies comprise Policies G1 and G7 of the London Plan 2021 and Policies DM1 (C), DM9 (D), DM19 (B) and DM21 (A) of the Haringey Management DPD 2017 and Policies SP11, SP12 and SP13 of Haringey's Local Plan Strategic Policies 2013 – 2026 (consolidated 2017).

3.2 Soil Description

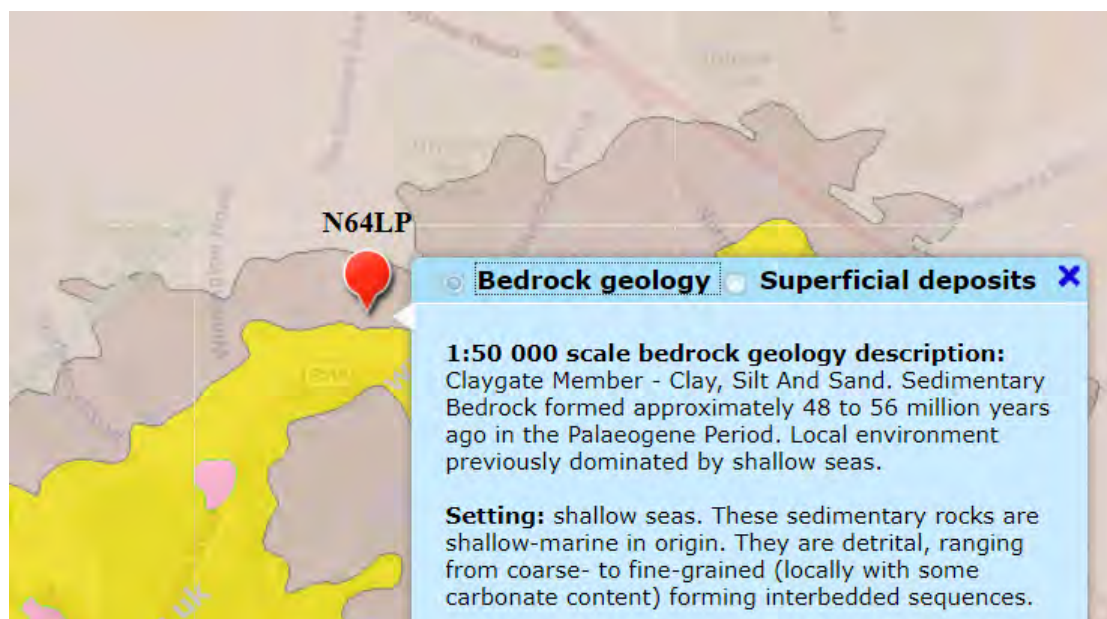


Figure 2: Extract from the BGS Geology of Britain Viewer

- 3.2.1 In terms of the British Geological Survey, the site overlies the Claygate Member / Beds (see dark area on plan extract above). As the youngest part of the London Clay, they form a transition between the clay and the sandier Bagshot Beds above (shown in yellow). Unlike the Bagshot Beds, more typical of Hampstead Heath, the associated soils are generally, highly shrinkable clay; e.g. slowly permeable seasonally waterlogged fine loam over clay. Such highly plastic soils are prone to movement: subsidence and heave.
- 3.2.2 The actual limits of soil series are not as clearly defined on the ground as on plan and there may be anomalies between them. Further advice from the relevant experts on the specific soil properties can be sought as necessary.
- 3.2.3 Clay soils are prone to compaction during development. Damage to soil structure can have a serious impact on tree health. Design of foundations near problematic tree species will also need to take into consideration subsidence risk.

3.3 Subject Trees

- 3.3.1 Of the 30 surveyed trees, 9 are category* B (Moderate Quality), 16 are category C (Low Quality), 1 is category C/U (Low / Poor Quality) and 3 are category U (Poor Quality); none are category A (High Quality). The 30th specimen recorded comprises the stump of a tree surveyed as T12 in our 2018 survey of the site.
- 3.3.2 The tree species found on the site comprise English oak, Leyland cypress, holly, rhododendron, silver birch, bay laurel, common hazel, cotoneaster, sycamore, common beech, sorbus, Scots pine, goat willow, rowan, common yew and purple plum.
- 3.3.3 In terms of age demographics there are predominantly semi-mature and mature specimens present with a few early mature trees present.
- 3.3.4 Full details of the surveyed trees can be found in Appendix 1 of this report.
- 3.3.5 There are recommended works for 4 on-site trees. These are listed in Appendix 2.
- 3.3.6 NB T3 oak (see photo 3 below) is recommended therein for felling on account of its moribund condition. In view of the local (Bishops Wood) sensitivity to removal of oaks, a proviso is made for the tree's retention through pollarding (severe pruning) subject to further investigation. To some extent the applicant would be led by the council's sentiments here, not wishing an essentially separate management decision to adversely impact upon a wider planning decision. Notwithstanding this sensitivity, my inclination would be to fell. I think it reasonable to go out of one's way to maintain a mature oak tree in decline at the bottom of the garden (as with similarly affected T15) where a preference for benign neglect may be expected; more intensive maintenance and formal aesthetics are reasonable within a front driveway courtyard at <5m from the corner of the house and overhanging the neighbours' boundary. Moreover, the tree's habit (high crown break) leaves little of aesthetic value to retain in a pollard (but a pole shape). On this basis, felling is my preference.


*page 9 of: [British Standards Institute: Trees in relation to design, demolition and construction BS 5837: 2012 HMSO, London](#)



Photograph 2: Frontage of 2 Courtenay Avenue



Photograph 3: Oak T3 recommended for removal regardless of development

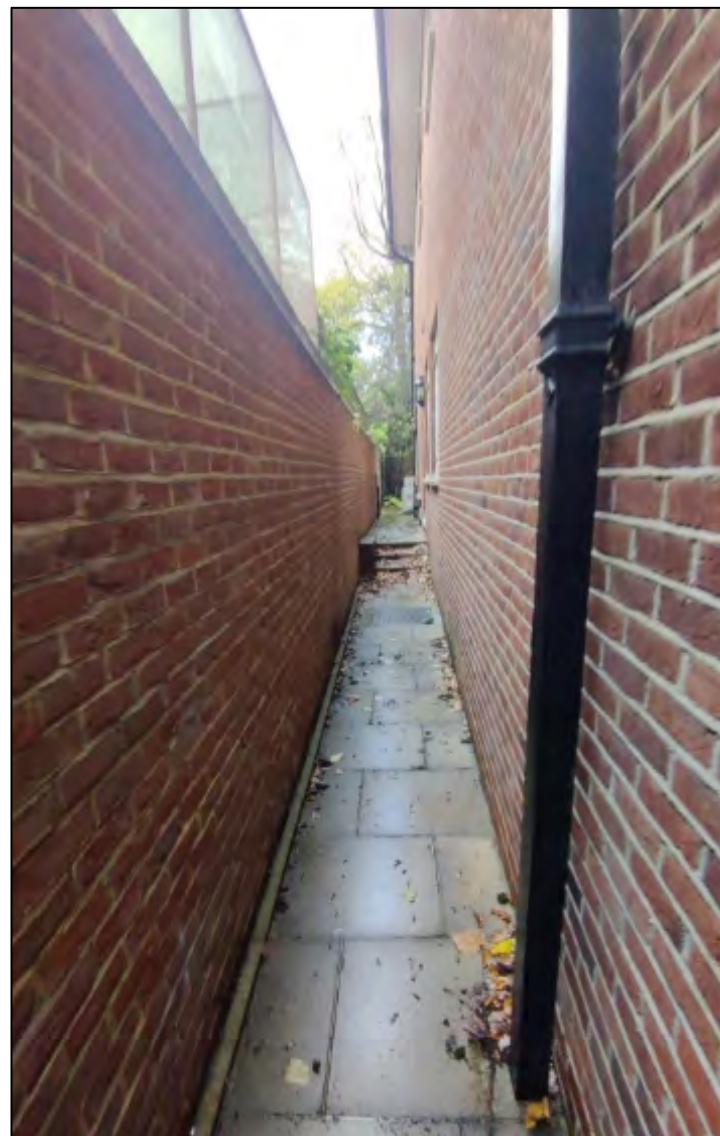

Photograph 4: Existing arrangement between house and northern boundary

4. DEVELOPMENT CONSTRAINTS

4.1 Primary Constraints

- 4.1.1 BS5837: 2012 gives Recommended Protection Areas (RPAs) for any given tree size. The individual RPAs are calculated in the Tree Schedule in Appendix 1 to this report, or rather the notional radius of that RPA, based on a circular protection zone. The prescribed radius is 12-x stem diameter at 1.5m above ground level, except where composite formulae are used in the case of multi-stemmed trees.
- 4.1.2 Circular RPAs are appropriate for individual specimen trees grown freely, but where there is ground disturbance, the morphology of the RPA can be modified to an alternative polygon, as shown in the diagram below (Figure 3). Alternatively, one need principally remember that RPAs are area-based and not linear – notional rather than fixed entities.

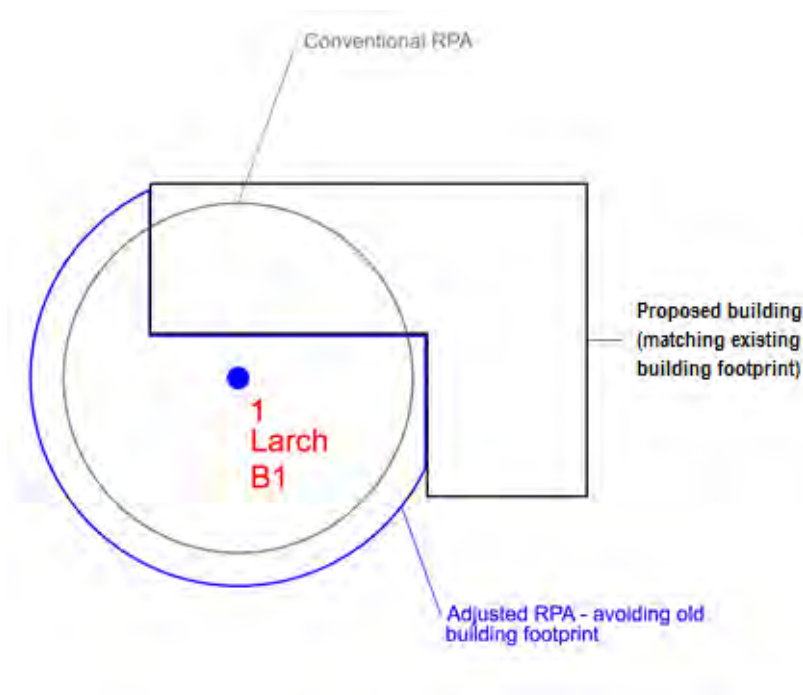


Figure 3 – Generic BS 5837 RPA Adjustments

- 4.1.3 In BS5837, paragraph 4.6.2 states that RPAs should reflect the morphology and disposition of the roots; where pre-existing site conditions or other factors indicate that rooting has occurred asymmetrically, a polygon of equivalent area should be produced. Modifications to the shape of the RPA should reflect a soundly based arboricultural assessment of likely root distribution. This can be done as a desktop / theoretical exercise but is not altogether (scientifically) reliable and may also invite disagreement / differences of opinion as to that distribution.

- 4.1.4 LT prefer where possible and practical to raise the issue of modification but suspend judgment until such time as more reliable site investigations have been undertaken (Tree Radar scans and / or trial pits). Of course, the justification for these investigations will depend upon whether trees are (or are likely to be once modified) subject to impacts and also upon their quality / condition: it is generally not worth commissioning a radar study to locate the roots of a poor- or low-quality tree. On other occasions, there may not be the opportunity to commission investigations, either because the access is restricted by ownership / tenancy or the report's turnaround simply does not allow it, and they may need to follow on or be conditioned. **No a priori RPA modifications have been made in this instance despite our working hypothesis that the soil beneath the existing house is not a priority area to protect. This is principally due to the difficulty in accurately ascribing the modified area in situations such as this where numerous barriers to rooting exist.**
- 4.1.5 The quality of trees will also be a consideration: U Category trees are discounted from the planning process in view of their limited useful life expectancy. Again, Category-C trees would not normally constrain development individually, unless they provide some external screening function.
- 4.1.6 At paragraph 5.1.1. BS5837: 2012 notes that "Care should be exercised over misplaced tree preservation; attempts to retain too many or unsuitable trees on a site are liable to result in excessive pressure on the trees during demolition or construction work, or post-completion demands on their removal."
- 4.1.7 In theory, only moderate quality trees and above are significant material constraints on development. However, low quality trees comprise a constraint in aggregate, in terms of any collective loss / removal, where replacement planting is generally considered appropriate.
- 4.1.8 In this instance, the moderate quality trees present have the potential to pose significant constraints to development of the site.

4.3 Secondary Constraints

4.3.1 The second type of constraint produced by trees that are to be retained is that the proximity of the proposed development to the trees should not threaten their future with ever increasing demands for tree surgery or felling to remove nuisance shading (Figure 4), honeydew deposition or perceived risk of harm.

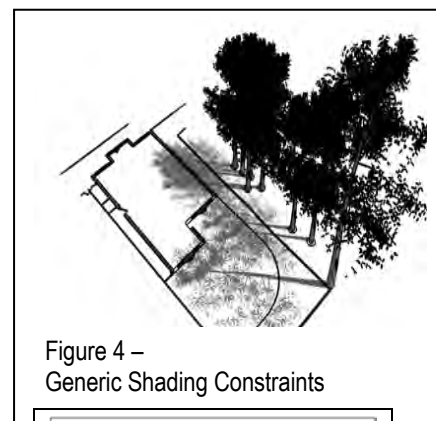


Figure 4 –
Generic Shading Constraints

4.3.2 The shading constraints are crudely determined from BS5837 by drawing an arc from northwest to east of the stem base at a distance equal to the height of the tree, as shown in the diagram opposite. Shade is less of a constraint on non-residential developments, particularly where rooms are only ever temporarily occupied.

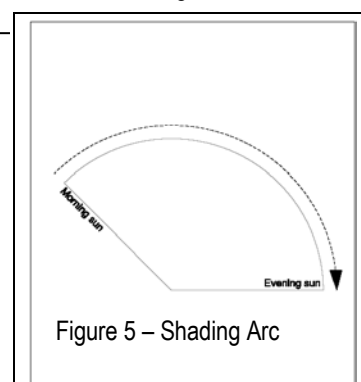


Figure 5 – Shading Arc

4.3.3 This arc (see Figure 5) represents the effects that a tree will have on layout through shade, based on shadow patterns of 1x tree height for a period May to Sept inclusive 10.00-18.00 hrs daily.

4.3.4 Assuming that they will be retained, the orientation of the on- and off-site trees means some have the potential to provide a variety of secondary constraints, including shading, organic deposition and the potential need to maintain crown clearance in the future. The significance of these constraints will vary depending on the location and proximity to the proposed re-development which is considered below (in Sections 5 & 6). As specified by BS5837, this section (4) of the report considers only the site as it is, not in the light of pending proposals.

Note: Sections 5 & 6 below will now assess the impacts of the proposals upon constraints identified in Section 4 above. Table 1 in Section 5 presents the impacts in tabular form (drawing upon survey data presented in Appendices 1 & 2). Impacts are presented in terms of whole tree removal and the effect on the landscape or partial encroachment (% of RPA) and its effect on individual tree health. Section 6 discusses the table data, elaborating upon the impacts' significance and mitigation.

Table 1: Arboricultural Impact Assessment

(Impacts assessed prior to mitigation and rated with reference to Matheny & Clark (1998))

Hide irrelevant

Show All Trees

Ref: WFA_2CNY_AIA

B.S. Cat.	Tree No.	Species	Impact	Tree / RPA Affected	Age	Growth Vitality	Species Tolerance	Impact on Tree Rating	Impact on Site Rating	Mitigation
B	1	Oak, English	Terrace & Hard Surfacing Replacement within RPA	m ² N/A %	Mature	Moderate	Moderate	Very Low	Very Low	No-dig construction
B	2	Oak, English	Terrace & Hard Surfacing Replacement within RPA	m ² N/A %	Mature	Normal	Moderate	Very Low	Very Low	No-dig construction
C	3	Oak, English	Building Construction within RPA Building Construction within Canopy	24.7 m ² 5.46 %	Mature	Poor	Moderate	Very Low	Very Low	Airspade / manual excavation Remedial tree surgery (see Rec. Works)
C	4	Oak, English	LGF Construction within RPA Building Construction within Canopy	m ² N/A %	Mature	Moderate	Moderate	Low	Low	Hand dig top 750mm of LGF line thro' RPA Remedial tree surgery (see Rec. Works)
C	G4	Mixed shrubs	Wall Construction within RPA	m ² N/A %	Semi-mature	Moderate	Moderate	Very Low	Very Low	Low-invasive foundation design
C	5	Birch, Silver	Felled to Facilitate Development	m ² N/A %	Mature	Moderate	N/A	N/A	Low	New planting / landscaping
C	6	Hazel, Common	Felled to Facilitate Development	m ² N/A %	Mature	Normal	N/A	N/A	Low	New planting / landscaping

Table 1: Arboricultural Impact Assessment

(Impacts assessed prior to mitigation and rated with reference to Matheny & Clark (1998))

Hide irrelevant

Show All Trees

Ref: WFA_2CNY_AIA

B.S. Cat.	Tree No.	Species	Impact	Tree / RPA Affected	Age	Growth Vitality	Species Tolerance	Impact on Tree Rating	Impact on Site Rating	Mitigation
C	7	Cotoneaster	Felled to Facilitate Development	m ² N/A %	Early Mature	Normal	N/A	N/A	Low	New planting / landscaping
B	8	Oak, English	Wall Construction within RPA	m ² N/A %	Mature	Normal	Moderate	Very Low	Very Low	Low-invasive foundation design
B	9	Oak, English	Wall Construction within RPA	m ² N/A %	Mature	Moderate	Moderate	Very Low	Very Low	Low-invasive foundation design
B	17	Oak, English	Wall Demolition within RPA	m ² N/A %	Mature	Normal	Moderate	Very Low	Very Low	Low-invasive foundation design
C	18	Sorbus species	Hard Surfacing Replacement within RPA	m ² N/A %	Semi-mature	Moderate	Moderate	Low	Low	No-dig construction
B	22	Sycamore	Hard Surfacing Replacement within RPA	m ² N/A %	Mature	Normal	Moderate	Low	Low	No-dig construction


6. ARBORICULTURAL IMPLICATIONS

6.1 Rating of Primary Impacts


- 6.1.1 The principal impacts in the current proposals are the removal of T's 5, 6, and 7. In terms of resource management, these comprise a relatively small portion of the whole. Those removed generally have more collective than individual specimen value such that their loss could be mitigated with new planting, bringing its own benefits of enrichment and diversification to a relatively unmanaged and subsisting resource. Similarly, though pruning of T3 (if retained, see 3.3.6 above)) and T4 is required here to serve development, undertaken to best practice, the scale envisaged should not be altogether untoward in a more managed and occupied site. The immediate reduction in canopy cover through felling and / or pruning is therefore rated as a low impact unlikely to harm either the resource or the wider conservation area.
- 6.1.2 The most significant, on plan, impact to retained trees occurs as a result of the encroachment of the theoretical RPA of two retained trees, T3 and T4, by the proposed extension works to the existing dwelling, with the new LGF level encroaching within the RPA of T4. Assessment of the impact of this must be made in the light of the current and proposed building footprints as these remain the same within T3's RPA, with only a minor expansion in the built footprint within T4's RPA where it increases by some 24.7sqm, 5.5% of its total.
- 6.1.3 Accordingly, the impact to T3 is assessed as being negligible with the impact to T4 assessed as being very low, as the distribution of an RPA below the existing building is in principle, unjustified: notwithstanding a reduced probability of rooting below significant structures, the principle of protecting and promoting root colonisation below vulnerable building foundations conflicts with other responsibilities of / liabilities for the council. We would also consider the existing brick boundary wall and hard landscaping shown in Photograph 4 to have acted as barriers to root growth into the application site by T4.
- 6.1.4 The potential impact to T3 could be mitigated by airspade / manual excavation within the relevant area of encroachment - however, as indicated in Appendix 2, the felling / pollarding of T3 is recommended in the interests of good husbandry because of its moribund condition (regardless of proposed development), in which case replacement planting would offset the loss. The impact is therefore rated as very low, unlikely to harm either the resource or the wider conservation area.
- 6.1.5 In respect of T4, hand-digging the top 750mm of lower ground floor encroachment under arboricultural supervision with root-pruning where appropriate in the event that rooting were to be present in the relevant location would reduce the risk of damage (see 6.3) – accordingly this is therefore rated as a low impact unlikely to harm either the resource or the wider conservation area.

- 6.1.6 Further impacts to retained trees comprise the construction of new garden walls within the RPAs of G4, T8, T9 and T17 and the replacement of the existing terrace and hard surfacing to the front of the property within the RPAs of G1, T1, T2, T3, T18 and T22. The use of low-invasive foundations for the garden walls and no-dig construction for the replacement terrace and hard surfacing would mitigate the potential impacts of these aspects of the scheme (see 6.3) and accordingly is therefore rated as low / very low impacts unlikely to harm either the resource or the wider conservation area.
- 6.1.7 In our view, apart from the moribund T3 for which work / felling is recommended in the interests of good husbandry notwithstanding development, the trees are of a species, age and condition sufficient to remain viable in the circumstances, given that the area lost to new encroachment can be compensated for elsewhere, contiguous with the RPA, and provided the series of mitigation measures outlined below are followed to both reduce the immediate impact of working methods and also improve the soil environment that is used by the tree for growth. Supervision and monitoring of such measures will also be essential. Subject to these provisos the net impacts are assessed as being low.
- 6.1.8 There is no set RPA encroachment that is immediately permissible. However, at para 5.3.a of BS5837, the project arboriculturist is charged with demonstrating that the tree(s) will remain viable in the instance of RPA encroachment. Whilst there is little research on RPA encroachment itself, there have been various commonly cited studies of root severance (see overleaf). Whilst the RPA is not coextensive with the wider root system, one can make some correlations after Thomas (2014): in average (sic) conditions, a straight line tangential with a tree's canopy would transect 15% of the root system, for another mid-way to the trunk that figure would be 30%. In the current cases, **the impacts would be below the lower of these two parameters** as can be seen in Plan 2 in the Appendix or where more irregular in profile, can be gleaned from the percentage RPA encroachments in Table 1. There is no precise correlation between % RPA and root impairment or loss. However, in our experience, most RPA tend to exceed the free-grown canopy spread a little (c. x 1.2 -1.5), suggesting by reference to both Thomas and Fig. 5a - 5c overleaf, RPA encroachments marginally understate the percentage root loss. The informal 20% RPA threshold may equate to c. 30% root loss, and 10% RPA encroachment to c. 20% root loss. The assumptions made here are relatively crude and apply more to open grown trees but are nonetheless illustrative.

RPA: 5m

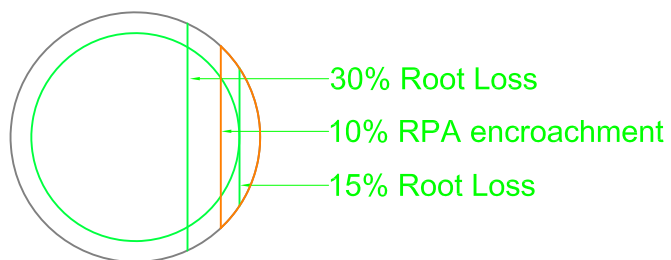


Area 7.98 sq.m. (10.0%)

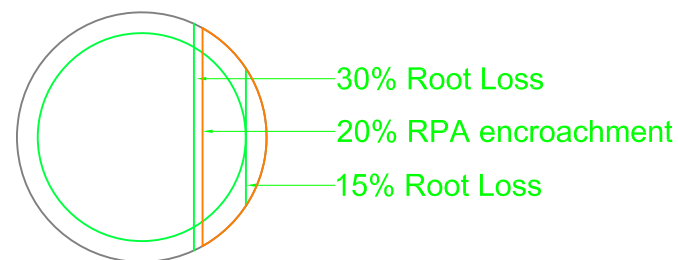


Area 15.96 sq.m. (20.0%)

Figure 5a: approximate correlation between RPA encroachment and actual root loss on a free-grown tree of 5m RPA radius (after Thomas (2014))

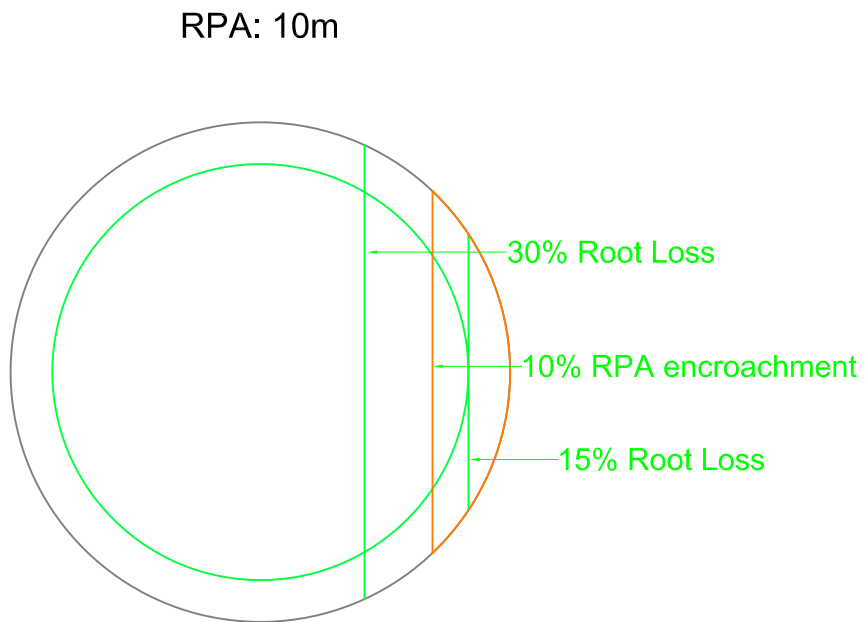


Area 31.17 sq.m. (10.0%)

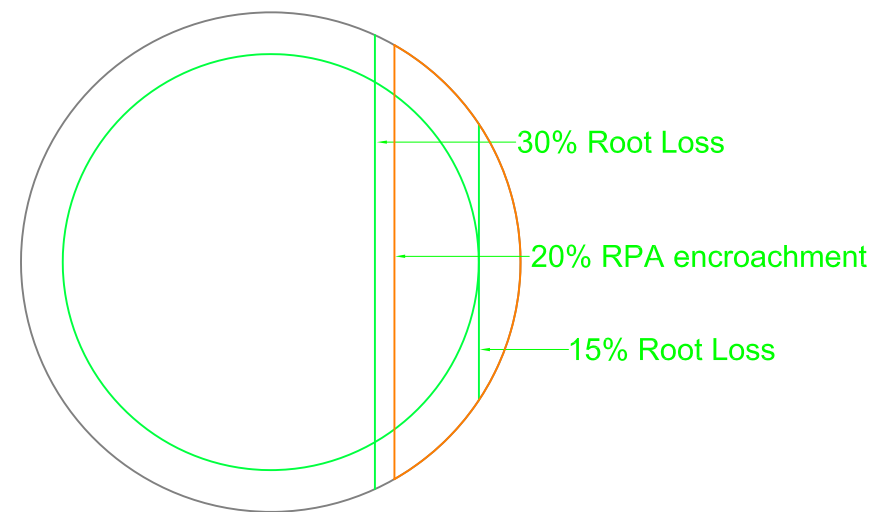


Area 62.33 sq.m. (20%)

Figure 5b: approximate correlation between RPA encroachment and actual root loss on a free-grown tree of 10m RPA radius (after Thomas (2014))

RPA: 15m

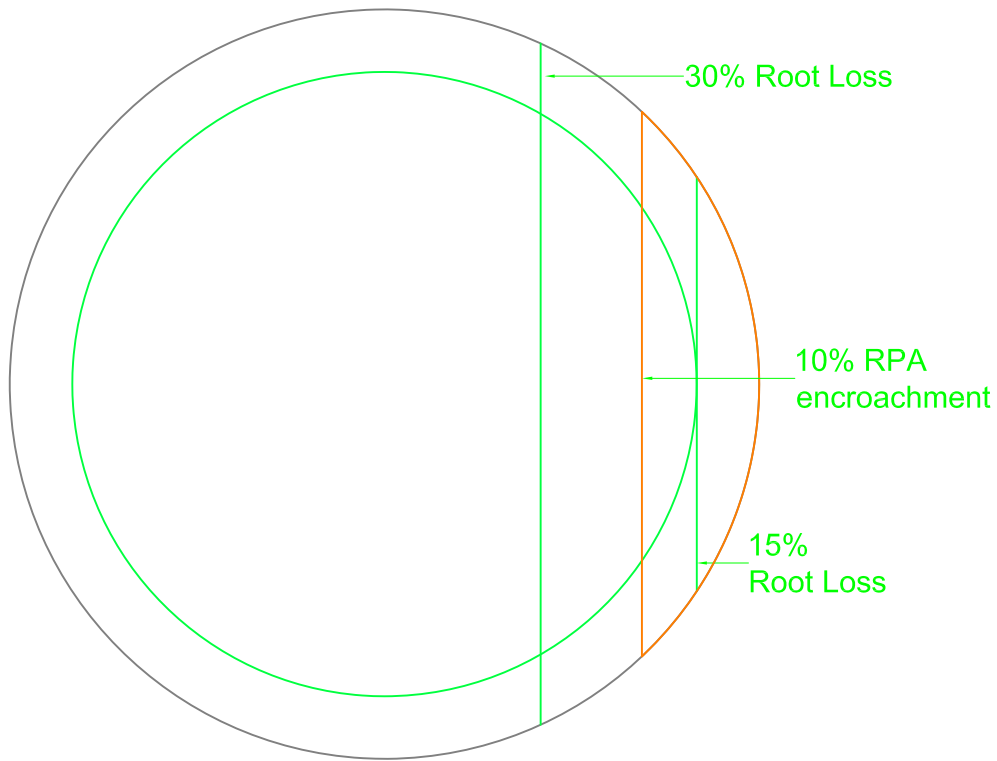

Area 70.7 sq.m. (10.0%)

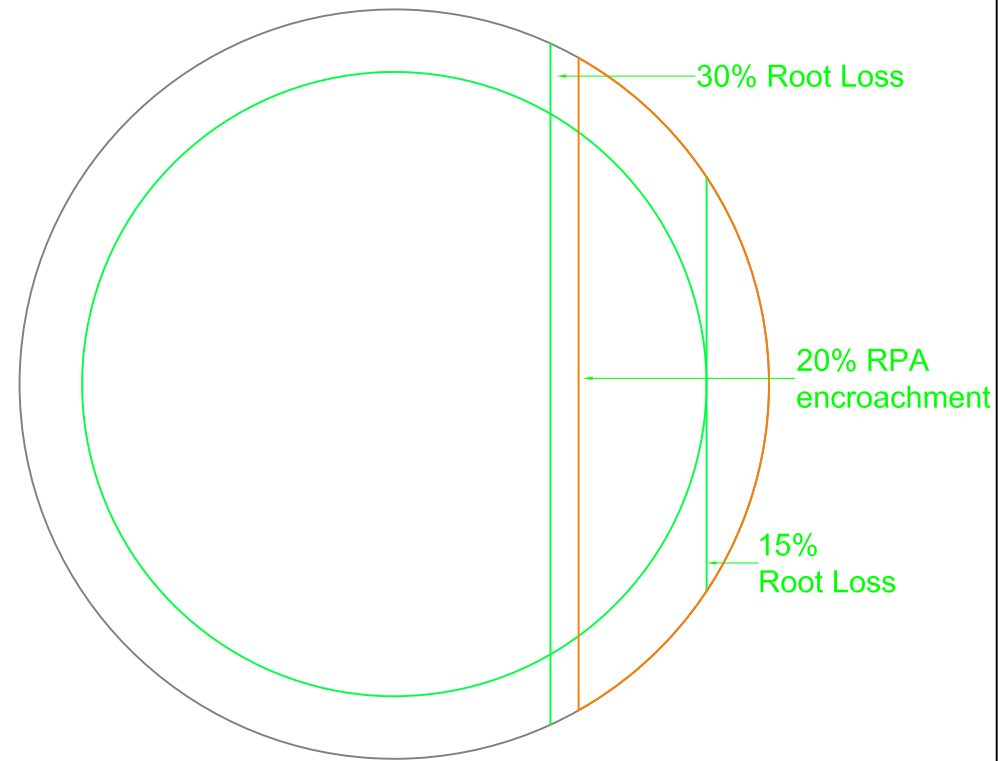

Area 141.4 sq.m. (20.0%)

Figure 5c: approximate correlation between RPA encroachment and actual root loss on a free-grown tree of 15m RPA radius (after Thomas (2014))

- 6.1.9 Published references suggest healthy trees tolerating up to 30-50% root severance in general (Coder, Helliwell and Watson in CEH 2006). **“In practice 50% of roots can sometimes be removed with little problem**, provided there are vigorous roots elsewhere. Inevitably, this degree of root loss will temporarily slow canopy growth and even lead to some dieback” (Thomas 2014). Clearly, it is not the purpose of this report to sanction impacts to test a tree’s physiological tolerance, where the guidance recommends the avoidance of impact / RPA encroachment as the default position. However, it has not proved possible at the design stage to avoid such encroachment altogether, and in that regard, the project arboriculturalist has determined that the retained trees can remain viable in the scheme before planning.
- 6.1.10 With the exception of T3, the trees in question are shown in Table 1 above to be reasonably healthy specimens of species with a moderate resistance to development impacts, and of an age quite capable of tolerating these limited impacts. Nor do the site characteristics suggest specific soil anomalies having a bearing on such considerations, provided appropriate measures (e.g. ground protection) are taken.
- 6.1.11 As per BS5837 recommendations (at 5.3.a), the above assessment demonstrates that the tree(s) can remain viable and as per the equivalent hatching in Plan 2 of the Appendices that the area(s) lost to encroachment can be compensated for elsewhere. The guide also recommends (at 5.3.b) the arboriculturalist propose a series of mitigation measures (to improve the soil environment that is used by the tree for growth). These are provided at 6.3 below.

6.2 Rating of Secondary Impacts

- 6.2.1 There will always be marginal secondary impacts of honeydew / litter deposition and partial shade on this site, regardless of development. Thus, the status quo is unlikely to change with further development, which is the salient point for planning to consider. Thus, the secondary impacts of development are minimal.

6.3 Mitigation of Impacts

- 6.3.1 The replanting scheme will offer considerable enhancement and replaces low-quality trees. Replacement trees will have the advantage of being specifically selected for the proposed site, healthy and fit-for-purpose. Design can provide for a diverse range of native and ornamental species that will compliment rather than conflict with the proposals, so providing a more sustainable long-term resource for the future. A selection of tree species and cultivars for open and constricted sites is provided in Appendix 4.

- 6.3.2 New RPA encroachments are shown in Plan 2 compensated for elsewhere on contiguous land. Soft ground within the unaffected parts of encroached RPAs will be treated with a 75mm layer of mulch which will be maintained in place throughout the duration of construction activities.
- 6.3.3 All plant and vehicles engaged in demolition works should either operate outside the RPA, or should run on a temporary surface designed to protect the underlying soil structure. The demolition of the building should proceed inwards in a “pull down” fashion. Hard surfacing should first be broken up with manual power tools and then can be lifted with caution by a skilled machine operator again working away from the tree.
- 6.3.4 The path of foundations through RPAs will be manually excavated to 750mm depth under arboricultural supervision; any roots encountered within the trenches / pits will be cleanly pruned back to an appropriate junction with a sharp pruning saw or secateurs back to a junction. Roots larger than 25mm diameter may only be cut in consultation with an arboriculturalist.
- 6.3.5 The limits of excavation within RPAs will be undertaken manually; any roots encountered will be cleanly pruned back to an appropriate junction with a sharp pruning saw or secateurs. Roots larger than 25mm diameter may only be cut in consultation with an arboriculturalist.
- 6.3.6 The garden wall encroachments will require the use of specialised foundation techniques, such as mini-piling or pad and raised beam. The foundation pits within the RPA should be trial-excavated by hand under arboricultural supervision using a double-headed spade (“shove-holer”) or similar to minimise breadth of hole required for inspection; any roots encountered within the trenches / pits will be cleanly pruned back to an appropriate junction with a sharp pruning saw or secateurs back to a junction. Roots larger than 25mm diameter may only be cut in consultation with an arboriculturalist.
- 6.3.7 The replacement terrace and driveway will require a no-dig construction technique, either using a cellular confinement system with no fines aggregate for the sub-base or simply building upon the existing sub-base without disturbing the ground below. Choice of construction method will initially depend upon root penetration within the existing sub-grade. The key principle is not to excavate in the presence of roots and to provide a porous surface to promote healthy soil water relations for future root growth. A further consideration in the use of a more expensive cellular confinement system or similar, may be the claimed reduction in risk of possible future slab / surface displacement by roots of trees growing in paved areas.
- 6.3.8 The immediate canopy encroachment from T3 and T4 can be avoided with a crown lift of lower limbs and minor crown reduction – however, as indicated in Appendix 2, the felling / pollarding of T3 is recommended in the interests of good husbandry (regardless of proposed development).
- 6.3.9 Nuisance deposition can be further mitigated with routine maintenance, light pruning / deadwooding and the fitting of filtration traps on guttering (see Figure 6 overleaf).

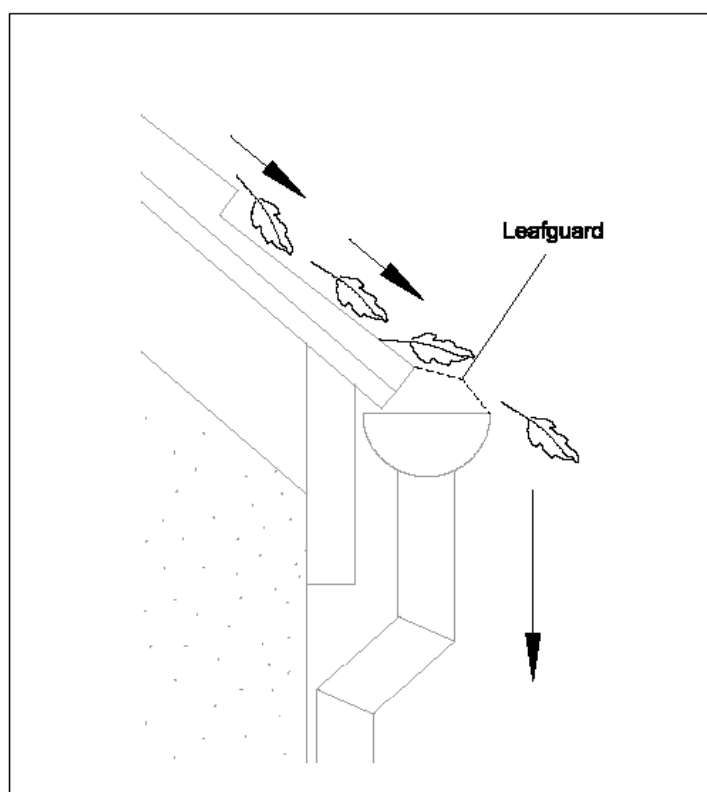


Figure 6: Filtration traps, as shown above, could be fitted on the gutters which can easily be maintained at 2-3m above ground.

- 6.3.10 The shading impacts can be mitigated by building design, with the provision of dual aspect windows and choice of room layout. Some minor crown reduction may be necessary, but not such as to impose a burden of frequent, repetitive management.

7. CONCLUSION

- 7.1 The potential impacts of development are all relatively low / very low in terms of both quality of trees removed and also RPA encroachments of trees retained. In the latter case, the report has demonstrated as per BS5837 paragraph 5.3.1 (a) that the tree(s) can remain viable and that the area lost to encroachment can be compensated for elsewhere, contiguous with its RPA; the report also proposes as per paragraph 5.3.1 (b) a series of mitigation measures to improve the soil environment that is used by the tree for growth.
- 7.2 The full potential of the impacts can thus be largely mitigated through design and precautionary measures. These measures can be elaborated in Method Statements in the discharge of planning conditions.
- 7.3 The species affected are generally tolerant of root disturbance / crown reduction and the retained trees are generally in reasonable health and capable of sustaining these reduced impacts.
- 7.4 The trees that are recommended for felling are of little individual significance, such that their loss (subject to replacement planting) will not affect the visual character of the area.
- 7.5 Therefore, the proposals will not have any significant impact on either the retained trees, the Highgate Conservation Area or wider landscape thereby complying with Policies G1 and G7 of the London Plan 2021 and Policies DM1 (C), DM9 (D), DM19 (B) and DM21 (A) of the Haringey Management DPD 2017 and Policies SP11, SP12 and SP13 of Haringey's Local Plan Strategic Policies 2013 – 2026 (consolidated 2017). Thus, with suitable mitigation and supervision the scheme is recommended to planning.

8. RECOMMENDATIONS

8.1 Specific Recommendations

- 8.1.1 Tree works recommendations in Appendix 2 are not part of the current application, but requirements of general maintenance that will need to be applied for (subject to para. 3.3 of this report and any other relevant constraints in planning or leasehold) by the client separately. Consent for the current planning application does not impart any consent for the Appendix 2 maintenance works. Please note, though, the owner and / or manager of a property have a duty to maintain a safe site of work and to protect occupiers of the surrounding land / members of the public from tree hazards. Works recommended in this report should be enacted in a timely fashion by the relevant party regardless of the progress of the development.
- 8.1.2 Recommendations for works required to facilitate development are found in Appendix 3 and a selection of tree species cultivars for constricted sites provided in Appendix 4. Any tree removals recommended within this report should only be carried out with local authority consent.
- 8.1.3 Excavation and construction impacts within the RPAs of trees identified in Table 1 above, will need to be controlled by method statements specifying mitigation methods suggested in para 6.3 above and by consultant supervision as necessary. These method statements can be provided as part of the discharge of conditions.
- 8.1.4 Replace felled trees with native ornamental nursery stock under current best practice; i.e. conforming to and planted in accordance with the following:
- BS8545: 2014 Code of Practice for Trees from Nursery to Landscape
 - BS 3936-1: 1992 Nursery stock. Specification for trees and shrubs; and
 - BS 5236:1975 Cultivation and Planting of Trees in the Advanced Nursery Stock Category.
 - All replacement stock should be planted and maintained as detailed in BS 4428:1989 (Section 7): Recommendations for General Landscape Operations.

8.2 General Recommendations for Sites Being Developed with Trees / Outline Arboricultural Method Statement

- 8.2.1 Any trees which are in close proximity to the proposed development should be protected with a Tree Protection Barrier (TPB). Protective barrier fencing should be installed immediately following the completion of the tree works, remaining in situ for the entire duration of the development unless otherwise agreed in writing by the Council. It should be appropriate for the intensity and proximity of the development, usually comprising steel, mesh panels 2.4m in height ('Heras') and should be mounted on a scaffolding frame (shown in Fig 2 of BS5837:2012). The position of the TPB can be shown on plan as part of the discharge of conditions, once the layout is agreed with the planning authority.

- 8.2.2 The TPB should be erected prior to commencement of works, remain in its original form on-site for the duration of works and be removed only upon full completion of works.
- 8.2.3 A TPB may no longer be required during soft landscaping work but a full arboricultural assessment must be performed prior to the undertaking of any excavations within the RPA of a tree. This will inform a decision about the requirement of protection measures. It is important that all TPBs have permanent, weatherproof notices denying access to the RPA. Extant areas of RPA that cannot be fenced off and therefore lie outside the CEZ must be protected with fit-for-purpose ground protection. The location and type of ground protection is shown in the Tree Protection Plan in the Appendices
- 8.2.4 The use of heavy plant machinery for building demolition, removal of imported materials and grading of surfaces should take place in one operation. The necessary machinery should be located above the existing grade level and work away from any retained trees. This will ensure that any spoil is removed from the RPAs. It is vital that the original soil level is not lowered as this is likely to cause damage to the shallow root systems.
- 8.2.5 Any pruning works must be in accordance with British Standard 3998:2010 Tree work [BS3998].
- 8.2.6 Where sections of hard surfacing are proposed in close proximity to trees, it is recommended that “No-Dig” surfacing be employed in accordance with BS5837:2012.
- 8.2.7 If the RPA of a tree is encroached by underground service routes then BS5837:2012 and NJUG VOLUME 4 provisions should be employed. If it is deemed necessary, further arboricultural advice must be sought.
- 8.2.8 Numerous site activities are potentially damaging to trees e.g. parking, material storage, the use of plant machinery and all other sources of soil compaction. In operating plant, particular care is required to ensure that the operational arcs of excavation and lifting machinery, including their loads, do not physically damage trees when in use.
- 8.2.9 To enable the successful integration of the proposal with the retained trees, the following points will need to be taken into account:
- 1) Plan of underground services.
 - 2) Schedule of tree protection measures, including the management of harmful substances.
 - 3) Method statements for constructional variations regarding tree proximity (e.g. foundations, surfacing and scaffolding).
 - 4) Site logistics plan to include storage, plant parking/stationing and materials handling.
 - 5) Tree works: felling, required pruning and new planting. All works must be carried out by a competent arborist in accordance with BS3998.

- 6) Site supervision: the Site Agent must be nominated to be responsible for all day-to-day arboricultural matters on site. This person must:
- be present on site for the majority of the time;
 - be aware of the arboricultural responsibilities;
 - have the authority to stop work causing, or may cause harm to any tree;
 - ensure all site operatives are aware of their responsibilities to the trees on site and the consequences of a failure to observe these responsibilities;
 - arrange with the retained arboricultural consultant an initial pre-start briefing to inspect tree protection measures and agree a schedule of monitoring thereof on an initial monthly basis to be reviewed over the duration of works.
 - give advance notice (ideally 2 weeks) to retained arboricultural consultant to arrange for supervision of any excavation (especially for services and foundations) within RPA
 - make immediate contact with the local authority and/or a retained arboricultural consultant in the event of any tree related problems occurring.

8.2.10 These points can be resolved and approved through consultation with the planning authority via their Arboricultural Officer.

8.2.11 The sequence of works should be as follows:

- i) initial tree works: felling, stump grinding and pruning for working clearances;
- ii) installation of TPB for demolition & construction;
- iii) installation of underground services;
- iv) installation of ground protection;
- v) main construction;
- vi) removal of TPB;
- vii) soft landscaping.

9. COMPLIANCE: Trees and the Planning System

- 9.1 Under the UK planning system, local authorities have a statutory duty to consider the protection and planting of trees when granting planning permission for proposed development. The potential effect of development on trees, whether statutorily protected (e.g. by a tree preservation order or by their inclusion within a conservation area) or not, is a material consideration that is taken into account in dealing with planning applications. Where trees are statutorily protected, it is important to contact the local planning authority and follow the appropriate procedures before undertaking any works that might affect the protected trees.
- 9.2 The nature and level of detail of information required to enable a local planning authority to properly consider the implications and effects of development proposals varies between stages and in relation to what is proposed. Table B.1 provides advice to both developers and local authorities on an appropriate amount of information. The term “minimum detail” is intended to reflect information that local authorities are expected to seek, whilst the term “additional information” identifies further details that might reasonably be sought, especially where any construction is proposed within the RPA.
- 9.3 This report delivers information appropriate to a full planning application and to these specific proposals as per BS5837 Table B.1 below, providing both minimum details and further additional material in the form of general tree protection recommendations and constructional variation.

Table B.1 Delivery of tree-related information into the planning system

Stage of process	Minimum detail	Additional information
Pre-application	Tree survey	Tree retention/removal plan (draft)
Planning application	Tree survey (in the absence of pre-application discussions)	Existing and proposed finished levels
	Tree retention/removal plan (finalized)	Tree protection plan
	Retained trees and RPAs shown on proposed layout	Arboricultural method statement – heads of terms
	Strategic hard and soft landscape design, including species and location of new tree planting	Details for all special engineering within the RPA and other relevant construction details
	Arboricultural impact assessment	
Reserved matters/ planning conditions	Alignment of utility apparatus (including drainage), where outside the RPA or where installed using a trenchless method	Arboricultural site monitoring schedule
	Dimensioned tree protection plan	Tree and landscape management plan
	Arboricultural method statement – detailed	Post-construction remedial works
	Schedule of works to retained trees, e.g. access facilitation pruning	Landscape maintenance schedule
	Detailed hard and soft landscape design	

10.0 REFERENCES

- Barlow JF & Harrison G. 1999. Shade By Trees, Arboricultural Practice Note 5, AAIS, Farnham, Surrey.
- British Standards Institute. 2012. Trees in Relation to Design, Demolition and Construction - Recommendations BS 5837: 2012 HMSO, London.
- Centre for Ecology & Hydrology. 2006. Tree Roots in the Built Environment, HMSO, London.
- Helliwell R (1980) Provision for New Trees; Landscape Design; July/August issue
- International Society of Arboriculture (ISA). 1994. The Landscape Below Ground. ISA, Champaign, Illinois. USA.
- Lonsdale D 1999. Research for Amenity Trees No.7: Principles of Tree Hazard Assessment and Management, HMSO, London.
- Matheny, N; Clark, J. R.1998. Trees and Development: A Technical Guide to Preservation of Trees during Land Development. ISA, Champaign, Illinois. USA.
- Mattheck C. & Breloer H. 1994. Research for Amenity Trees No.2: The Body Language of Trees, HMSO, London.
- Thomas P, 2000 & 2014. Trees: Their Natural History, Cambridge University Press, Cambridge.
- Trowbridge J & Bassuk N (2004) Trees in the Urban Landscape: Site Assessment, Design, and Installation; J Wiley & Sons inc. NJ USA



Caveats

This report is primarily an arboricultural report. Whilst comments relating to matters involving built structures or soil data may appear, any opinion thus expressed should be viewed as qualified, and confirmation from an appropriately qualified professional sought. Such points are usually clearly identified within the body of the report. It is not a full safety survey or subsidence risk assessment survey. These services can be provided but a further fee would be payable. Where matters of tree condition with a safety implication are noted during a survey they will of course appear in the report.

A tree survey is generally considered invalid in planning terms after 2 years, but changes in tree condition may occur at any time, particularly after acute (e.g. storm events) or prolonged (e.g. drought) environmental stresses or injuries (e.g. root severance). Routine surveys at different times of the year and within two - three years of each other (subject to the incidence of the above stresses) are recommended for the health and safety management of trees remote from highways or busy access routes. Annual surveys are recommended for the latter.

Tree works recommendations are found in the Appendices to this report. It is assumed, unless otherwise stated ("ASAP" or "Option to") that all husbandry recommendations will be carried out within 6 months of the report's first issue. Clearly, works required to facilitate development will not be required if the application is shelved or refused. However, necessary husbandry work should not be shelved with the application and should be brought to the attention of the person responsible, by the applicant, if different. Under the Occupiers Liability Act of 1957, the owner (or his agent) of a tree is charged with the due care of protecting persons and property from foreseeable damage and injury.' He is responsible for damage and/or nuisance arising from all parts of the tree, including roots and branches, regardless of the property on which they occur. He also has a duty under The Health and Safety at Work Act 1974 to provide a safe place of work, during construction. Tree works should only be carried out with local authority consent, where applicable.

Inherent in a tree survey is assessment of the risk associated with trees close to people and their property. Most human activities involve a degree of risk, such risks being commonly accepted if the associated benefits are perceived to be commensurate.

Risks associated with trees tend to increase with the age of the trees concerned, but so do many of the benefits. It will be appreciated, and deemed to be accepted by the client, that the formulation of recommendations for all management of trees will be guided by the cost-benefit analysis (in terms of amenity), of tree work that would remove all risk of tree related damage.

Prior to the commencement of any tree works, an ecological assessment of specific trees may be required to ascertain whether protected species (e.g. bats, badgers and invertebrates etc.) may be affected.



Landmark Trees

PART 2 – APPENDICES

APPENDIX 1

TREE SCHEDULE

Botanical Tree Names

Bay, Laurel	: Laurus nobilis	Poplar, Grey	: Populus × canescens
Beech, Common	: Fagus sylvatica	Poplar, Lombardy	: Populus nigra 'Italica'
Birch, Silver	: Betula pendula	Poplar, White	: Populus alba
Cypress, Leyland	: Cupressus × leylandii	Privet, Chinese	: Ligustrum sinense
Hazel, Common	: Corylus avellana	Rowan, Mountain Ash	: Sorbus aucuparia
Holly, Common/English	: Ilex aquifolium	Sycamore	: Acer pseudoplatanus
Oak, English	: Quercus robur	Willow, Goat	: Salix caprea
Pine, Scots	: Pinus sylvestris	Yew, Common	: Taxus baccata
Plum, Purple	: Prunus cerasifera 'Nigra'		

Notes for Guidance:

1. Height describes the approximate height of the tree measured in metres from ground level.
2. The Crown Spread refers to the crown radius in meters from the stem centre and is expressed as an average of NSEW aspect if symmetrical.
3. Ground Clearance is the height in metres of crown clearance above adjacent ground level.
4. Stem Diameter (Dm) is the diameter of the stem measured in millimetres at 1.5m from ground level for single stemmed trees. BS 5837:2012 formula (Section 4.6) used to calculate diameter of multi-stemmed trees. Stem Diameter may be estimated where access is restricted and denoted by '#'.
5. Protection Multiplier is 12 and is the number used to calculate the tree's protection radius and area
6. Protection Radius is a radial distance measured from the trunk centre.
7. Growth Vitality - Normal growth, Moderate (below normal), Poor (sparse/weak), Dead (dead or dying tree).
8. Structural Condition - Good (no or only minor defects), Fair (remediable defects), Poor - Major defects present.
9. Landscape Contribution - High (prominent landscape feature), Medium (visible in landscape), Low (secluded/among other trees).
10. B.S. Cat refers to (British Standard 5837:2012 section 4.5) and refers to tree/group quality and value; 'A' – High, 'B' - Moderate, 'C' - Low, 'U' - Unsuitable for retention. The following colouring has been used on the site plans:
 - High Quality (A) (Green),
 - Moderate Quality (B) (Blue),
 - Low Quality (C) (Grey),
 - Unsuitable for Retention (U) (Red)
11. Sub Cat refers to the retention criteria values where 1 is Arboricultural, 2 is Landscape and 3 is Cultural including Conservational, Historic and Commemorative.
12. Useful Life is the tree's estimated remaining contribution in years.



Site: 2 Courtney Avenue

Date: 01/11/22

Appendix 1

Landmark Trees Ltd

020 7851 4544

Surveyor(s): Ross Gamblin

Ref: WFA_2CNY_AIA

BS5837 Tree Constraints Survey Schedule

Tree No.	English Name	Height	Crown Spread	Ground Clearance	Stem Diamete	Age Class	Protection Radius	Growth Vitality	Structural Condition	B.S. Cat	Sub Cat	Useful Life	Comments
1	Oak, English	20	6569	4.0	1070	Mature	12.8	Moderate	Fair	B	1	>40	Deadwood (minor) throughout crown Potential habitat tree Spotlight attached at 3m abg east
G1	Cypress, Leyland	8	1.5	1.5	150	Semi-mature	1.8	Moderate	Fair	C	2	20+	Small branch snap outs over each driveway entrance/exit Leyland hedge, 15 stems. Suppressed / dominated by mature oaks
2	Oak, English	21	7448	4.0	880	Mature	10.6	Normal	Good	B	2	>40	Slight crown bias to N Spotlight 3m abg east
G2	Holly	6.5	1.5	1.0	120	Semi-mature	1.4	Normal	Fair	C	2	20+	Linear screening element Grown out holly hedge comprising 13 stems
3	Oak, English	21	7789	5.0	1000	Mature	12.0	Poor	Poor	C	2	<10	Moribund with significant die back Stem bleeds visible Situating on boundary, full assessment prevented. Conservation value to 'defects'
G3	Rhododendron	5	1.5	1.0	120	Semi-mature	1.4	Moderate	Fair	C	2	10+	Low quality under story group comprising rhododendron, willow, birch, laurel, oak, mountain ash



Site: 2 Courtney Avenue

Date: 01/11/22

Appendix 1

Landmark Trees Ltd

020 7851 4544

Surveyor(s): Ross Gamblin

Ref: WFA_2CNY_AIA

BS5837 Tree Constraints Survey Schedule

Tree No.	English Name	Height	Crown Spread	Ground Clearance	Stem Diamete	Age Class	Protection Radius	Growth Vitality	Structural Condition	B.S. Cat	Sub Cat	Useful Life	Comments
4	Oak, English	16	5425	4.0	900	Mature	10.8	Moderate	Fair	C	2	20+	In poor condition Remote survey only (RS) Limited potential given physiological decline
G4	Mixed shrubs	4.5	1212	1.0	120	Semi-mature	1.4	Moderate	Fair	C	2	10+	Garden ornamentals Boundary screening element group of hazel, laurel, bamboo screen
5	Birch, Silver	10	5125	3.0	400	Mature	4.8	Moderate	Fair	C	2	20+	Bleeding on lower stem Leaning (slightly) Poor form
G5	Bay, Laurel	3	1212	0.5	80	Early Mature	1.0	Moderate	Fair	C	2	10+	Laurel thicket
6	Hazel, Common	7	2342	1.5	120	Mature	1.4	Normal	Fair	C	2	10+	Multi stemmed specimen
7	Cotoneaster	4	2.5/3/2/4	1.5	330	Early Mature	4.0	Normal	Fair	C	2	10+	Garden ornamental Multi stemmed at base ARF DBH



Site: 2 Courtney Avenue

Date: 01/11/22

Appendix 1

Landmark Trees Ltd

020 7851 4544

Surveyor(s): Ross Gamblin

Ref: WFA_2CNY_AIA

BS5837 Tree Constraints Survey Schedule

Tree No.	English Name	Height	Crown Spread	Ground Clearance	Stem Diamete	Age Class	Protection Radius	Growth Vitality	Structural Condition	B.S. Cat	Sub Cat	Useful Life	Comments
8	Oak, English	17	5264	5.0	690	Mature	8.3	Normal	Fair	B	2	>40	Suppressed by nearby tree Deadwood (minor) throughout crown Electrics around stem
9	Oak, English	18	8567	7.0	930	Mature	11.2	Moderate	Good	B	1	>40	Deadwood throughout crown Electrics / spotlight west
10	Sycamore	18	6514	5.0	500	Mature	6.0	Normal	Fair	B	2	>40	Remote survey only (RS) Leans west
11	Holly	8	2222	3.0	240	Mature	2.9	Normal	Fair	C	2	20+	Bark wound on base
12	Beech, Common	0.5	0		0	Mature	0.0	Dead	Fair			<10	Tree removed since last survey Stump in situ, failed to W
13	Oak, English	14	3232	5.0	500	Mature	6.0	Poor	Poor	U		<10	Remote survey only (RS) Dying back (lead stem /centre) Located off site in neighbouring garden. Moribund. 90% dead. Ivy clad.



Site: 2 Courtney Avenue

Date: 01/11/22

Appendix 1

Landmark Trees Ltd

020 7851 4544

Surveyor(s): Ross Gamblin

Ref: WFA_2CNY_AIA

BS5837 Tree Constraints Survey Schedule

Tree No.	English Name	Height	Crown Spread	Ground Clearance	Stem Diamete	Age Class	Protection Radius	Growth Vitality	Structural Condition	B.S. Cat	Sub Cat	Useful Life	Comments
14	Birch, Silver	14	3233	5.0	290	Mature	3.5	Moderate	Fair	C	2	10+	
15	Oak, English	9	0353	4.5	410	Semi-mature	4.9	Moderate	Fair	U	2	<10	Secondary stem is dead Leaning to S, poor form Girdled by enveloped rope at 1.7m. No real potential
16	Oak, English	21	6653	6.0	870	Mature	10.4	Moderate	Good	C	1	>40	Deadwood (minor) throughout crown Ivy clad Beginning to stag head in upper crown
17	Oak, English	21	4566	5.0	710	Mature	8.5	Normal	Good	B	2	10+	A sparser than normal canopy Major deadwood to north, historical snap outs evident
18	Sorbus species	4.5	1302	2.5	192	Semi-mature	2.3	Moderate	Fair	C	2	10+	Leaning (slightly) Bifurcated at 0.10m Poor form, small purple plum at base to E
19	Pine, Scots	12	2322	7.0	340	Early Mature	4.1	Normal	Fair	B	2	20+	Remote survey only (RS) in neighbouring garden



Site: 2 Courtney Avenue

Date: 01/11/22

Appendix 1

Landmark Trees Ltd

020 7851 4544

Surveyor(s): Ross Gamblin

Ref: WFA_2CNY_AIA

BS5837 Tree Constraints Survey Schedule

Tree No.	English Name	Height	Crown Spread	Ground Clearance	Stem Diamete	Age Class	Protection Radius	Growth Vitality	Structural Condition	B.S. Cat	Sub Cat	Useful Life	Comments
20	Willow, Goat	9	0/5/1/1.5	2.0	210	Semi-mature	2.5	Moderate	Fair	C/U	2	10+	Heavy bias to S Heavy bias to S Poor form, limited potential
21	Rowan	12.5	3	2.0	450	Semi-mature	5.4	Moderate	Fair	C	2	10+	Multi stemmed specimen Ivy clad
22	Sycamore	24	4,2,5,10	6.0	650	Mature	7.8	Normal	Fair	B	2	20+	Remote survey only (RS) Asymmetry (minor)
23	Oak, English	17	3558	3.0	530	Mature	6.4	Moderate	Fair	B	2	20+	Deadwood (minor) throughout crown Long low lateral branch over lane
G24	Yew, Common	8	3	1.0	200	Semi-mature	2.4	Normal	Fair	C	2	20+	Remote survey only (RS) Grown out linear screening
25	Plum, Purple	6	0/1.5/0.5/0.5	1.0	110	Young	1.3	Moderate	Poor	U		<10	Poor physiological condition Unsuitable species for position Very limited potential

APPENDIX 2

RECOMMENDED TREE WORKS

Notes for Guidance:

Priority 1 - Urgent (ASAP), 2 - Standard (within 3 months), 3 - Non-urgent (2-3 years)

- CB - Cut Back to boundary/clear from structure.
- CL# - Crown Lift to given height in meters.
- CT#% - Crown Thinning by identified %.
- CR#% - Crown Reduce by given maximum % (of outermost branch & twig length)
- DWD - Remove deadwood.
- Fell - Fell to ground level.
- FInv - Further Investigation (generally with decay detection equipment).
- Pol - Pollard or re-pollard.
- Mon - Check / monitor progress of defect(s) at next consultant inspection which should be <18 months in frequented areas and <3 years in areas of more occasional use. Where clients retain their own ground staff, we recommend an annual in- house inspection and where practical, in the aftermath of extreme weather events.
- Svr Ivy / Clr Bs - Sever ivy / clear base and re-inspect base / stem for concealed defects.



Site 2 Courtney Avenue

Date 01/11/22

Surveyor(s) Ross Gamblin

Ref _2CTAV_011122

Appendix 2

Recommended Tree Works

Hide irrelevant

Show All Trees

Landmark Trees

Tree No.	English Name	B.S. Cat	Height	Ground Clearanc	Crown Spread	Recommended Works	Comments/ Reasons
3	Oak, English	C	21	5.0	7789	Fell Pollard option subject to further investigation	Moribund with significant die back Stem bleeds visible Situating on boundary, full assessment prevented. Conservation value to 'defects' Recommended husbandry 2
15	Oak, English	U	9	4.5	0353	Fell Pollard option subject to further investigation	Secondary stem is dead Leaning to S, poor form Girdled by enveloped rope at 1.7m. No real potential Recommended husbandry 2
16	Oak, English	C	21	6.0	6653	Svr Ivy	Deadwood (minor) throughout crown Ivy clad Beginning to stag head in upper crown Recommended husbandry 2
G1	Cypress, Leyland	C	8	1.5	1.5	CL 4m Crown lift over driveways to allow for access	Small branch snap outs over each driveway entrance/exit Leyland hedge, 15 stems. Suppressed / dominated by mature oaks Recommended husbandry 2

APPENDIX 3

RECOMMENDED TREE WORKS TO FACILITATE DEVELOPMENT (See Table 1)

Notes for Guidance:

- RP - Pre-emptive root pruning of foundation encroachments under arboricultural supervision.
- CB - Cut Back to boundary/clear from structure.
- CL# - Crown Lift to given height in meters.
- CT#% - Crown Thinning by identified %.
- CCL - Crown Clean (remove deadwood/crossing and hazardous branches and stubs)*.
- CR#% - Crown Reduce by given maximum % (of outermost branch & twig length)
- DWD - Remove deadwood.
- Fell - Fell to ground level.
- FInv - Further Investigation (generally with decay detection equipment).
- Pol - Pollard or re-pollard.
- Mon - Check / monitor progress of defect(s) at next consultant inspection which should be <18 months in frequented areas and <3 years in areas of more occasional use. Where clients retain their own ground staff, we recommend an annual in- house inspection and where practical, in the aftermath of extreme weather events.
- Svr Ivy / Clr Bs - Sever ivy / clear base and re-inspect base / stem for concealed defects.

*Not generally specified following BS3998:2010



Landmark Trees

Site 2 Courtney Avenue

Date 01/11/22

Appendix 3

Surveyor(s) Ross Gamblin

Ref WFA_2CNY_AIA

Recommended Tree Works To Facilitate Development

Hide irrelevant

Show All Trees

Tree No.	English Name	B.S. Cat	Height	Ground Clearanc	Crown Spread	Recommended Works	Comments/ Reasons
3	Oak, English	C	21	5.0	7789	CB 2m	Moribund with significant die back Stem bleeds visible Situated on boundary, full assessment prevented. Conservation value to 'defects' To facilitate development
4	Oak, English	C	16	4.0	5425	CB 2m	In poor condition Remote survey only (RS) Limited potential given physiological decline To facilitate development

APPENDIX 4: TREE SELECTION FOR URBAN LOCATIONS

Table A4.1: Small Ornamental Tree Species

Common Name	Species	(Columnar Form for discrete usage)
Hawthorn	<i>Crataegus monogyna</i>	Stricta
Cockspur	<i>Crataegus prunifolia</i>	Splendens
Cherry	<i>Prunus x hillieri</i>	Spire
Bird cherry	<i>Prunus padus</i>	Albertii
Rowan / Mountain ash	<i>Sorbus aucuparia</i>	Cardinal Royal
Swedish whitebeam	<i>Sorbus intermedia</i>	Brouwers
B. whitebeam	<i>Sorbus x thuringiaca</i>	Fastigiata

Table A4.2: Medium Specimen Tree Species

Common Name	Species	(Columnar Form for discrete usage)
Chinese red bark birch	<i>Betula albosinensis</i>	Fascination
Mongolian lime	<i>Tilia mongolica</i>	
Hornbeam	<i>Carpinus betulus</i>	Fastigiata Frans Fontaine
Turkish hazel	<i>Corylus columna</i>	
Maidenhair tree	<i>Ginkgo biloba</i>	
Pride of India	<i>Koelreuteria paniculata</i>	Fastigiata
European larch	<i>Larix decidua</i>	Sheerwater Seedling
Tulip tree	<i>Liriodendron tulipifera</i>	Fastigiata

Table A4.3: Larger Specimen Tree Species



Common Name	Species	(Columnar Form for discrete usage)
English oak	<i>Quercus robur</i>	f. Koster
American elm	<i>Ulmus americana</i> Princeton	
Cedar of Lebanon	<i>Cedrus libani</i>	



Landmark Trees

PART 3 – PLANS

PLAN 1**TREE CONSTRAINTS PLAN**

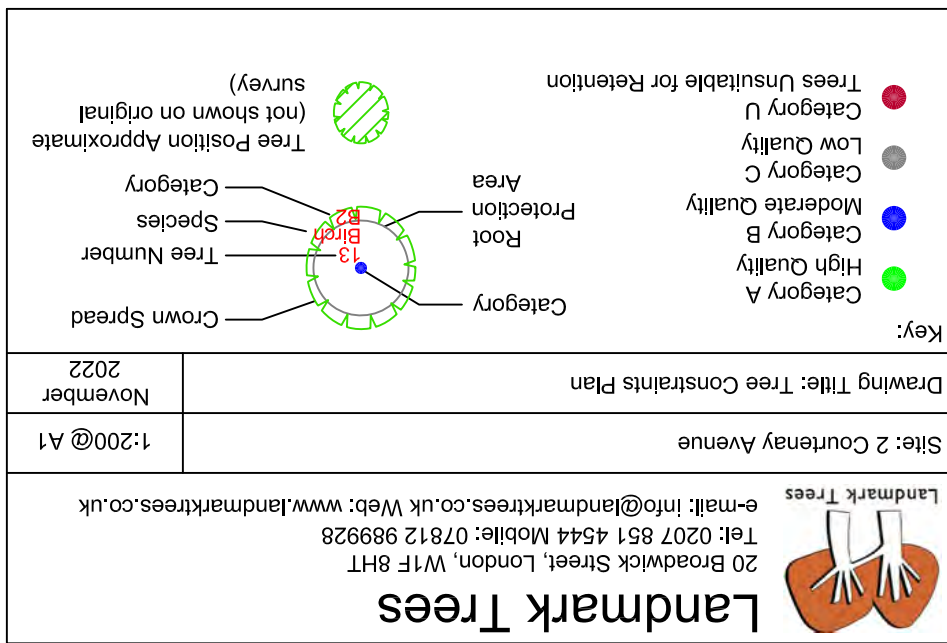


base).

NOTE: This survey is of a preliminary nature. The trees were inspected from the ground only on the basis of the Visual Tree Assessment method. No samples were taken for analysis. No decay detection equipment was employed. The survey does not cover the arrangements that may be required in connection with the felling or removal of underground services.


Branch spread in metres is taken at the four cardinal points to describe an accurate representation of the crown.

Root Protection Areas (RPAs) are derived from stem diameter measured at 1.5 m above the excavation ground level (taken on opposite corners of the tree) and the distance to the nearest side of the tree.

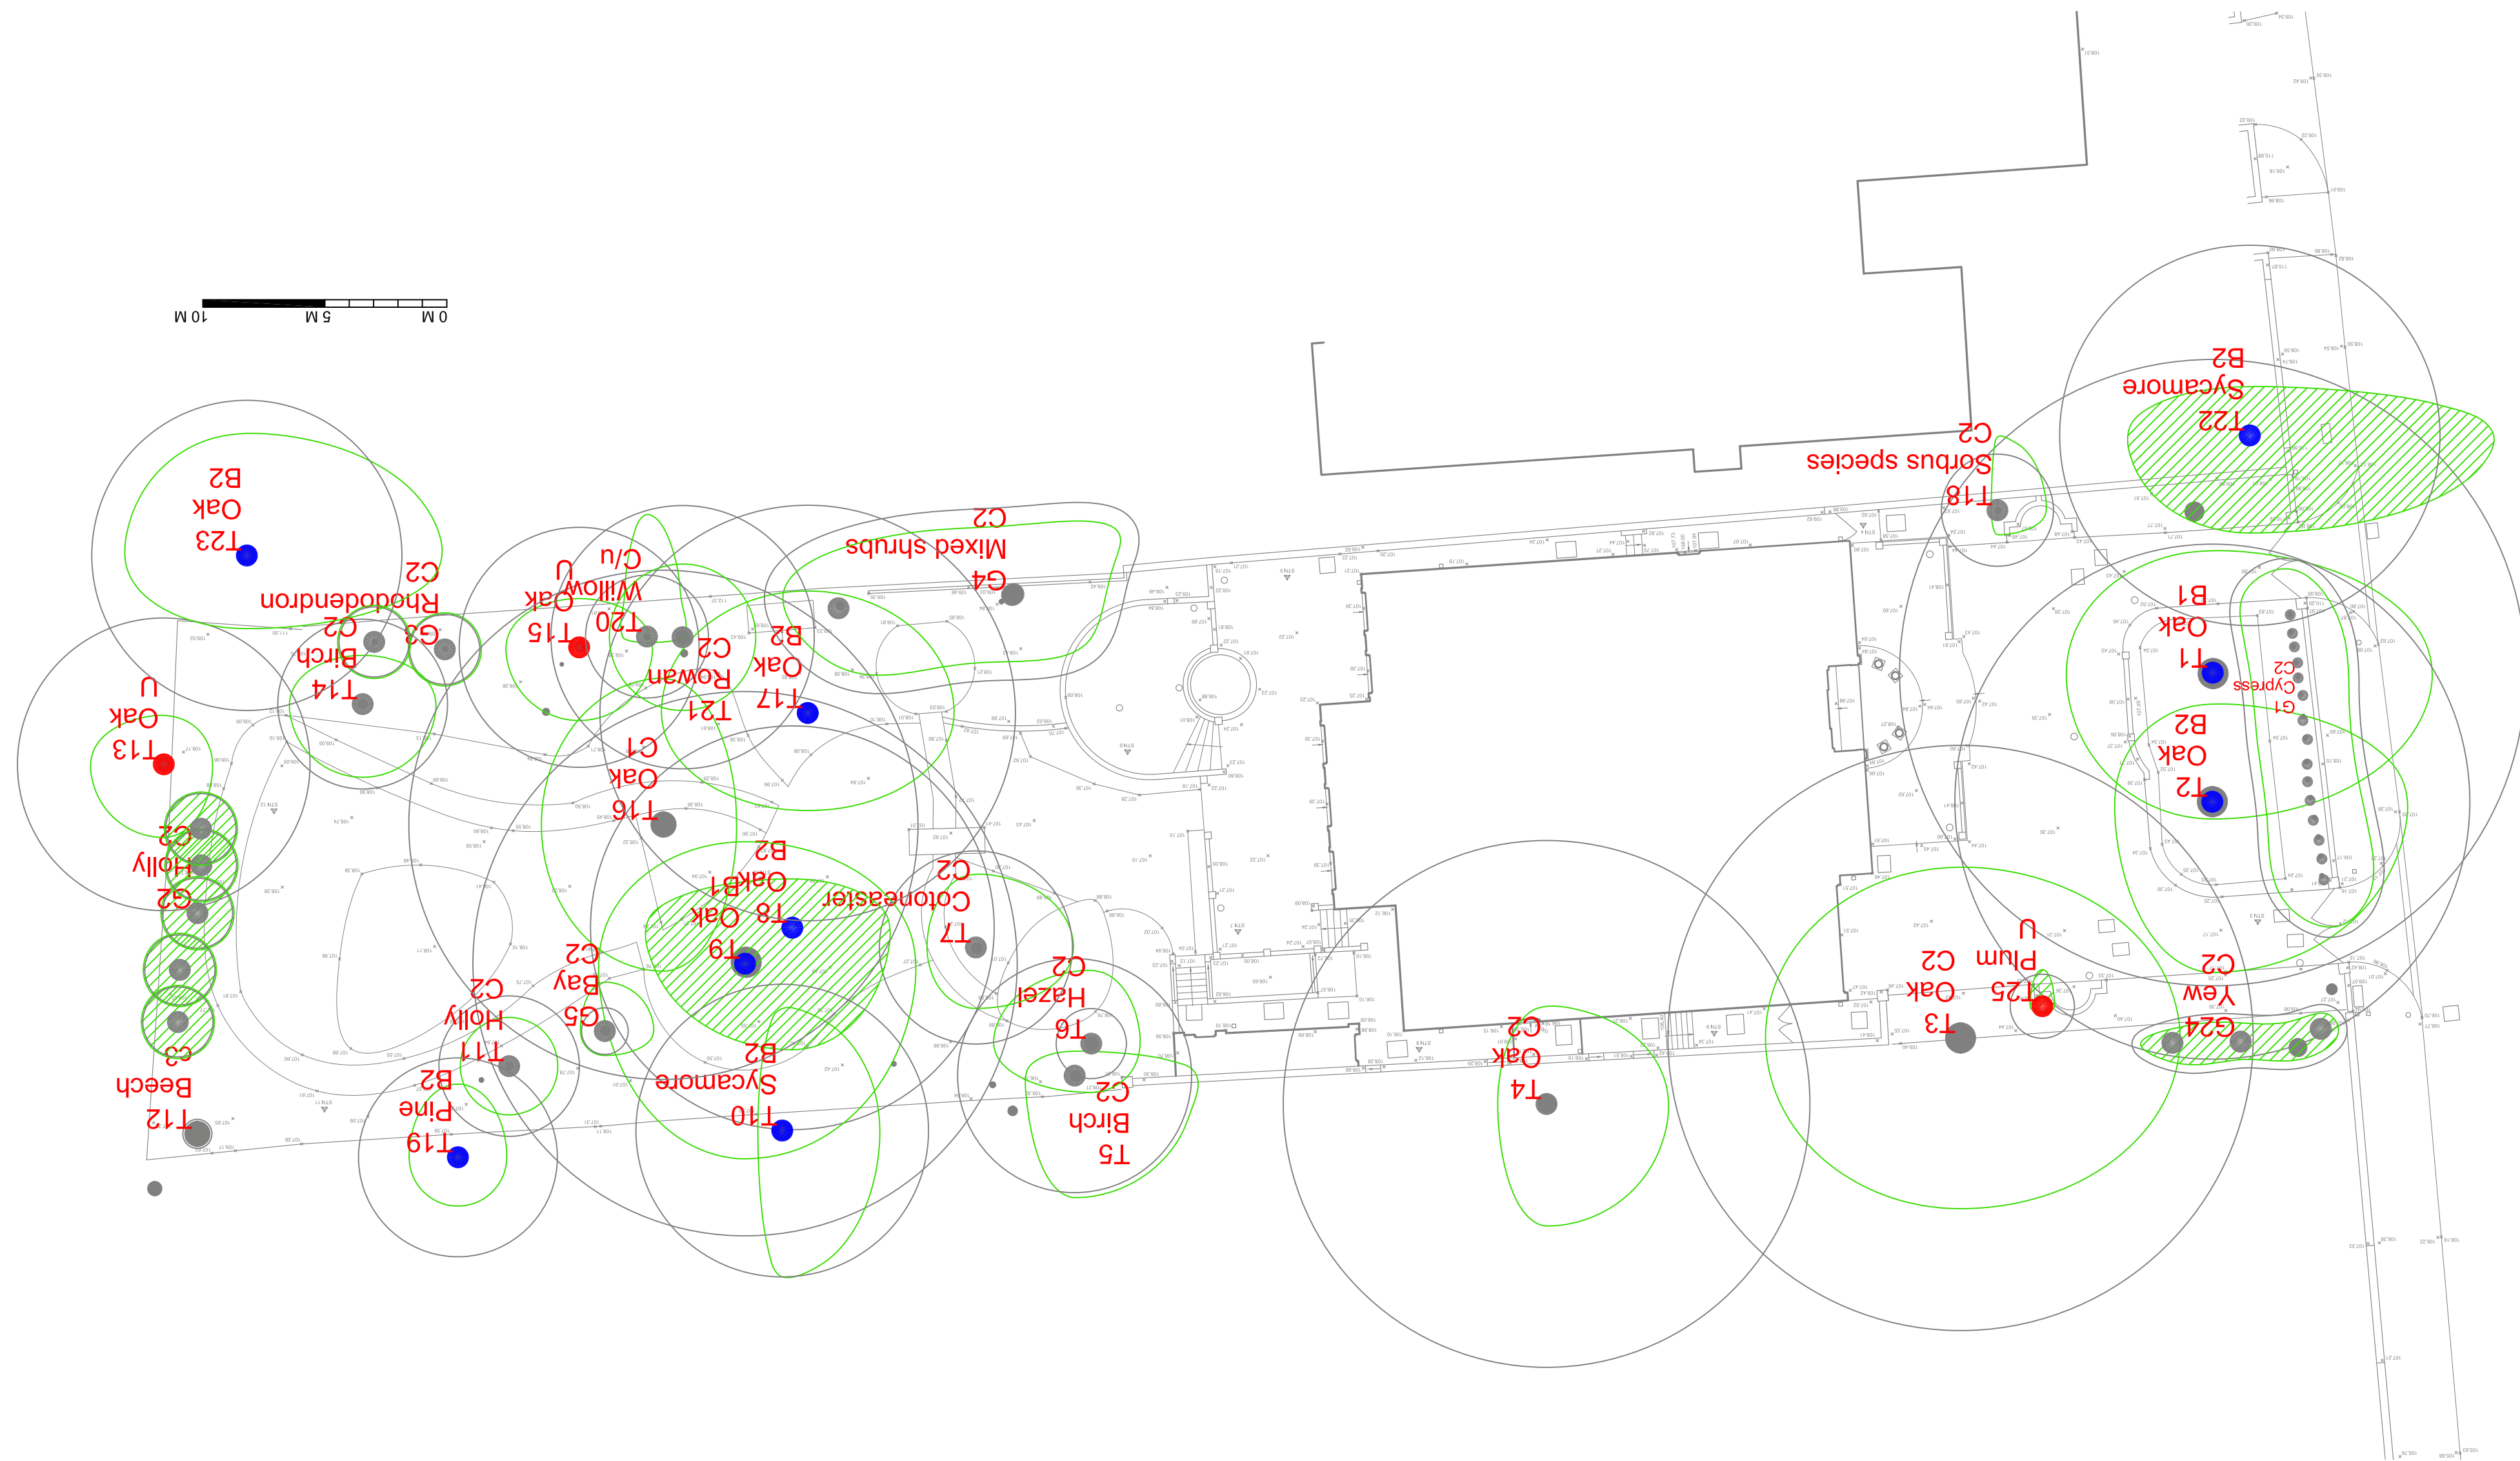

PLAN 2**ARBORICULTURAL IMPACT ASSESSMENT PLAN (S)**

- i. Site
- ii. Lower Ground Floor
- iii. Ground Floor

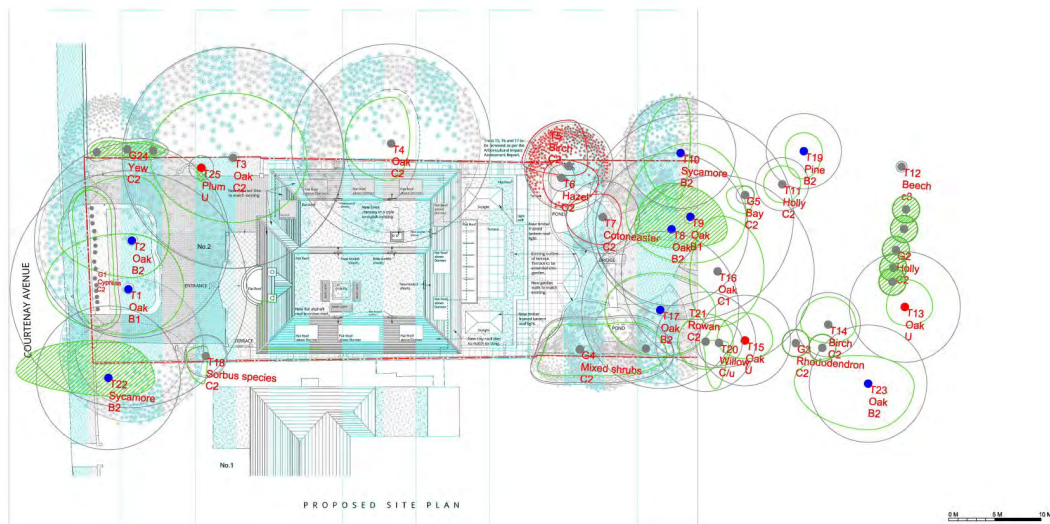

NOTE:
 The survey is of a preliminary nature. The trees were inspected from the ground only on the basis of the Visual Tree Assessment method. No sample were taken for analysis. No depth detection equipment was employed. The survey does not cover the underground parts of the trees.
 Branch spread in metres is taken at the four cardinal points to derive an accurate representation of the crown.
 Root Protection Areas (RPAs) are defined from stem diameter measured at 1.5 m above adjacent ground level (taken on sloping ground on the upslope side of the tree stem).



Landmark Trees
 25 Business Road, London, W11 8ET
 Tel: 0207 891 5554 Mobile: 07192 999999
 e-mail: info@landmarktrees.co.uk Web: www.landmarktrees.co.uk


120008 A1
 November 2023

Site: 3 Courtenay Avenue
 Drawing Title: Arboricultural Impact Assessment

Category	Tree Number	Crown Spread
Category A High Quality	1	10m
Category B Moderate Quality	2	10m
Category C Low Quality	3	10m
Category D Trees Unsuitable for Retention	4	10m

Key:
 Category A: High Quality
 Category B: Moderate Quality
 Category C: Low Quality
 Category D: Trees Unsuitable for Retention

Root Protection Area: (shown on original survey)
 Tree Protection: (shown on original survey)
 Trees Felled to Facilitate Development

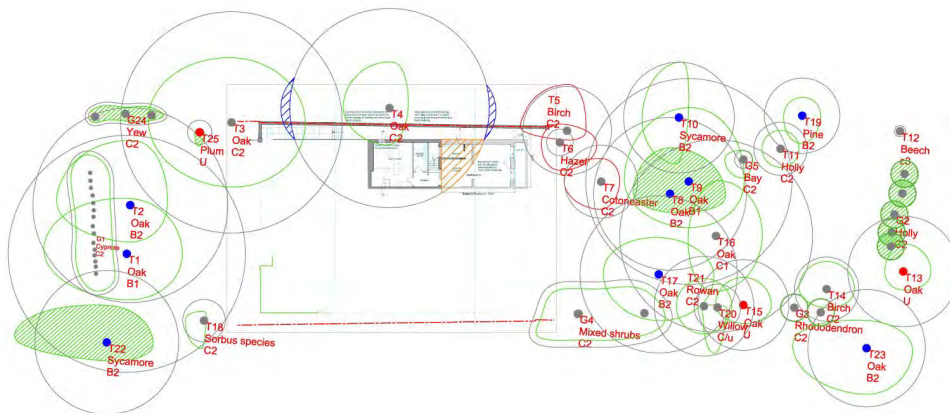

Proposed Lower Ground Floor Plan




NOTE:
The survey is of a preliminary nature. The trees were inspected from the ground only on the basis of the Visual Tree Assessment method. No samples were taken for analysis. No slope detection equipment was employed. The survey does not cover the underground but may be required in connection with the laying or removal of underground services.
Branch spread in metres is taken at the four cardinal points to derive an accurate representation of the crown.
Root Protection Areas (RPAs) are defined from stem diameter measured at 1.5 m above adjacent ground level (taken on sloping ground on the upslope side of the tree stem).

Landmark Trees
25 Business Street, London, W11 8BT
Tel: 0207 851 5554 Mobile: 07172 000008
Email: info@landmarktrees.co.uk Web: www.landmarktrees.co.uk

Site: 3 Courtenay Avenue
Drawing Title: Arboricultural Impact Assessment
November 2023

Key:	Category	Crown Spread
Category A High Quality	Tree Number	Tree Number
Category B Moderate Quality	Root Protection Area	Root Protection Area
Category C Low Quality	Tree Position (Approximate (not shown on original survey))	Tree Position (Approximate (not shown on original survey))
Category D Trees Unsuitable for Retention	Tree Felled to Facilitate Development	Tree Felled to Facilitate Development



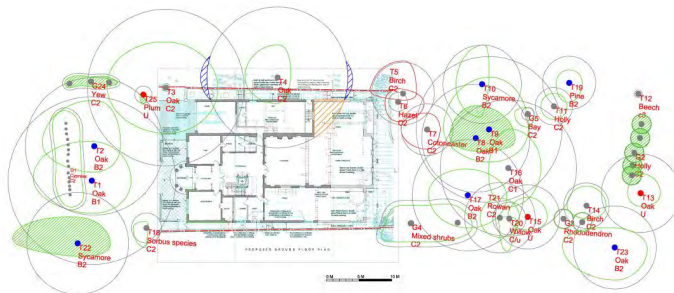

Area changed from BPA
Area from BPA
substituted

NOTE:
This survey is of a preliminary nature. The trees were inspected from the ground only on the basis of the Visual Tree Assessment method. No samples were taken for analysis. No ridge detection equipment was employed. The survey does not cover the arrangements that may be required in connection with the felling or removal of consequential trees.

Branch spread in relation to trunk is taken at the four cardinal points to derive an accurate representation of the crown.

Root Protection Areas (RPAs) are defined from stem diameter measured at 1.5m above adjacent ground level. 20mm or larger ground on the outside of the tree base.

Landmark Trees
23 Broadchurch Street, London, SE17 4BT
Tel: 0203 691 4444 (Mon-Fri 9.00-17.00)
e-mail: info@landmarktrees.co.uk Web: www.landmarktrees.co.uk

Site: 2 Courtenay Avenue

Drawing Title: Arboricultural Impact Assessment

11/03/21

11/03/21

11/03/21

11/03/21

11/03/21

11/03/21

11/03/21


11/03/21

11/03/21



PLAN 3

OUTLINE TREE PROTECTION PLAN

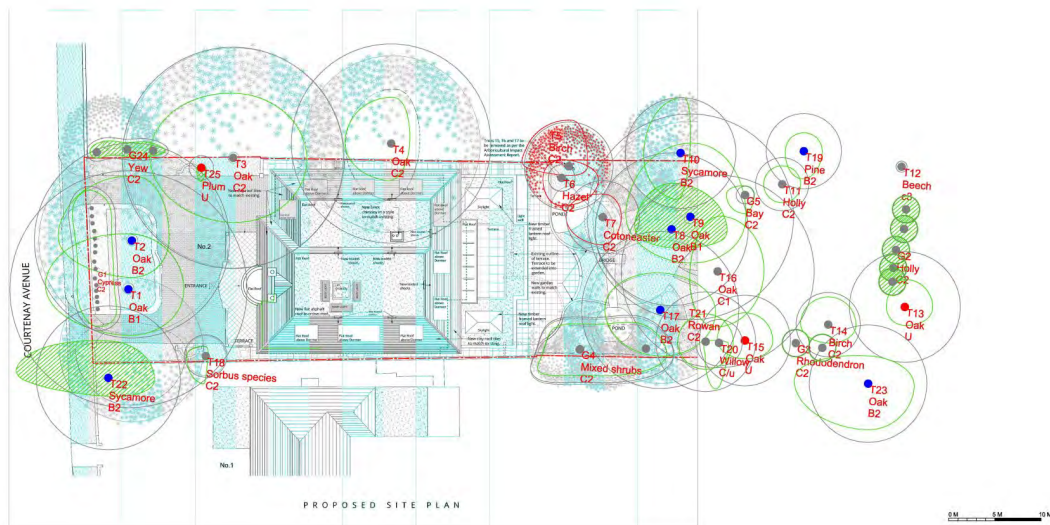

NOTE:
 The survey is of a preliminary nature. The trees were inspected from the ground only on the basis of the Visual Tree Assessment method. No sample were taken for analysis. No depth detection equipment was employed. The survey does not cover the underground parts of the trees.
 Branch spread in metres is taken at the four cardinal points to derive an accurate representation of the crown.
 Root Protection Areas (RPAs) are defined from stem diameter measured at 1.5 m above adjacent ground level (taken on sloping ground on the upslope side of the tree stem).

Landmark Trees
 25 Business Road, London, W11 8ET
 Tel: 0207 891 6544 Mobile: 07972 999898
 e-mail: info@landmarktrees.co.uk Web: www.landmarktrees.co.uk

Site: 3 Courtenay Avenue
 Drawing Title: Arboricultural Impact Assessment
 1:2000 @ A1
 November 2023

Key:

- Category A High Quality
- Category B Moderate Quality
- Category C Low Quality
- Category U Trees Unsuitable for Retention

Category

- Tree Number
- RPAs
- Tree Protection Area
- Tree Position Approximate (not shown on original survey)
- Tree Felled to Facilitate Development