

# 1 Features



## 1 - 1 RXM-R

1

- › Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- › Daikin outdoor units are neat, sturdy and can easily be mounted on a roof or terrace or simply placed against an outside wall
- › Outdoor units are fitted with a swing compressor, renowned for its low noise and high energy efficiency
- › Outdoor units for pair application
- › Anti-corrosion treated outdoor heat exchanger fin



Outdoor  
unit silent  
operation

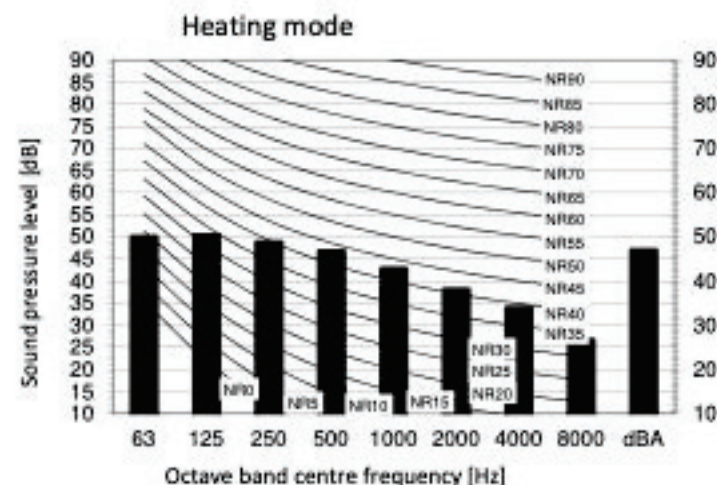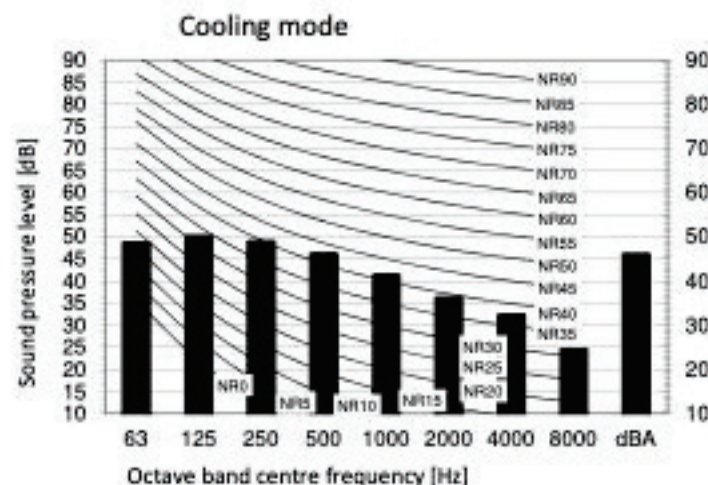

**Legend**

dBA = A-weighted sound pressure level (A scale according to IEC).

A Scale

B Fan speed: High

Location of microphone


**Notes**

- 1 Background noise already taken into account.
- 2 Operating conditions: power source 220-240 V/50/60 Hz; JIS standard
- 3 Operating noise varies depending on operation and ambient conditions.
- 4 The operation noise measuring method is in accordance with JISC9612.
- 5 Measuring location: anechoic chamber

Cooling

Total dB

| A   | B  |
|-----|----|
| dBA | 46 |

Heating

Total dB



| A   | B  |
|-----|----|
| dBA | 47 |

**3D110122A**

## 9 Sound data

### 9 - 1 Sound Pressure Spectrum

#### RXM35R

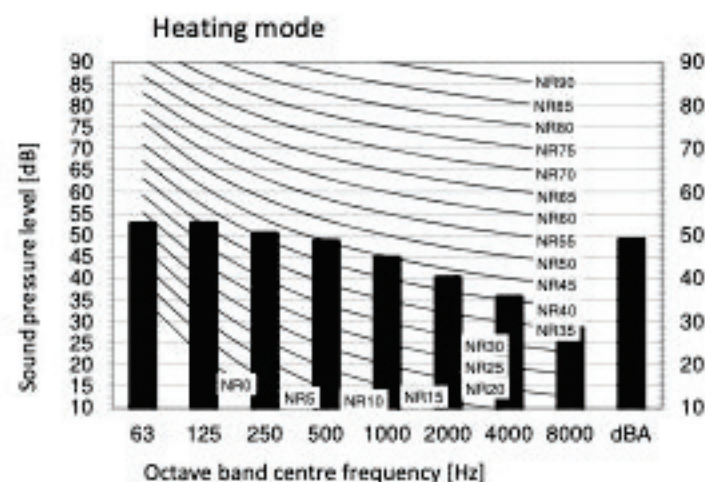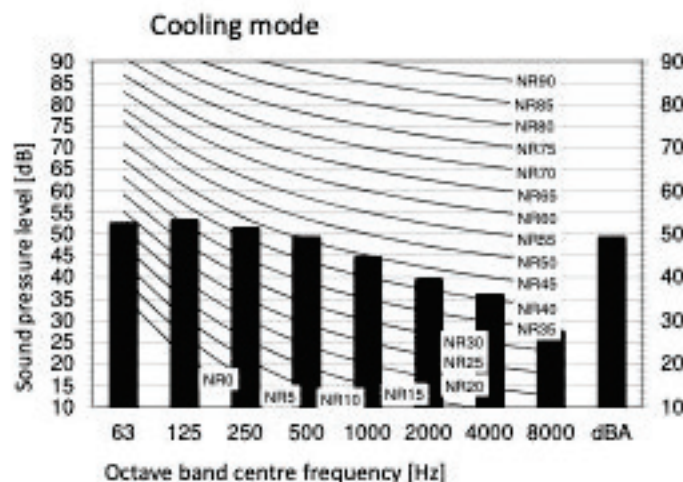


#### Legend

dBA = A-weighted sound pressure level (A scale according to IEC).

A Scale

B Fan speed: High

#### Location of microphone



#### Notes

- 1 Background noise already taken into account.
- 2 Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
- 3 Operating noise varies depending on operation and ambient conditions.
- 4 The operation noise measuring method is in accordance with JISC9612.
- 5 Measuring location: anechoic chamber

#### Cooling

#### Total dB

| A   | B  |
|-----|----|
| dBA | 49 |

#### Heating


#### Total dB

| A   | B  |
|-----|----|
| dBA | 49 |

# 9 Sound data

## 9 - 1 Sound Pressure Spectrum

RXM50R

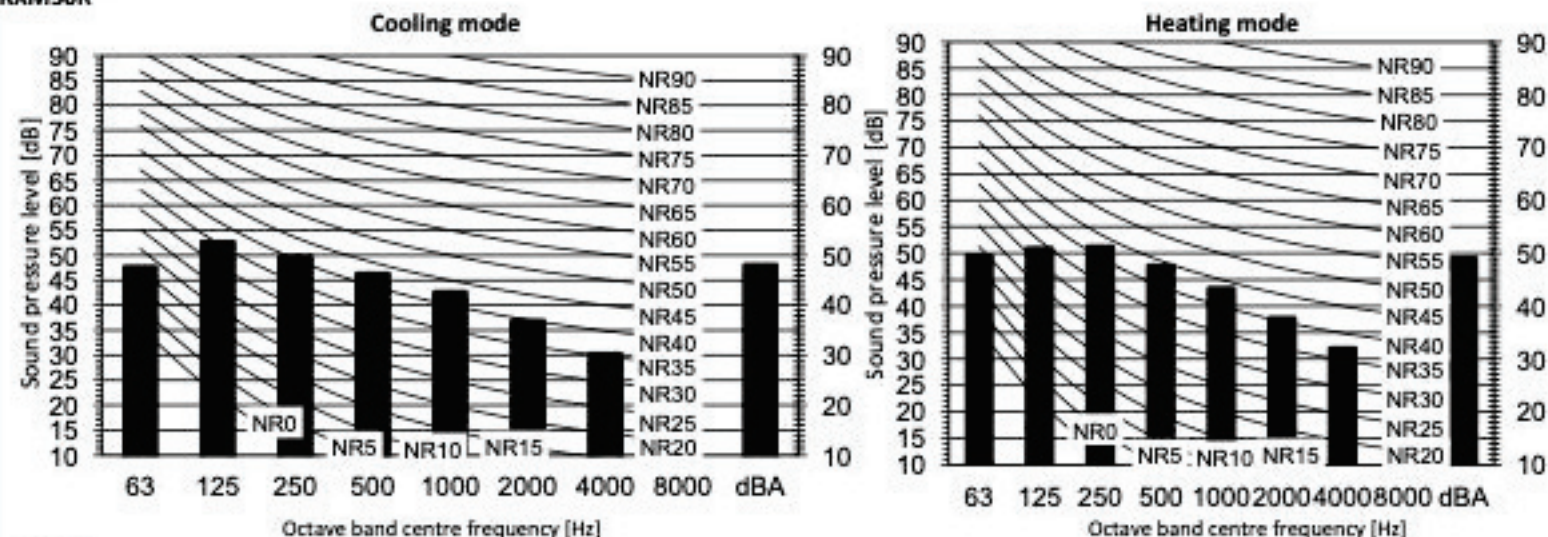

### Notes

- Operating conditions: power source 220-240 V/220 V 50/60 Hz; JIS standard
- Background noise already taken into account.
- Operating noise varies depending on operation and ambient conditions.
- The operation noise measuring method is in accordance with JISC9612.
- Measuring location: anechoic chamber

3D131753