
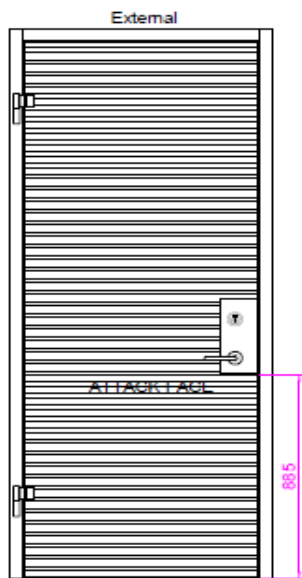
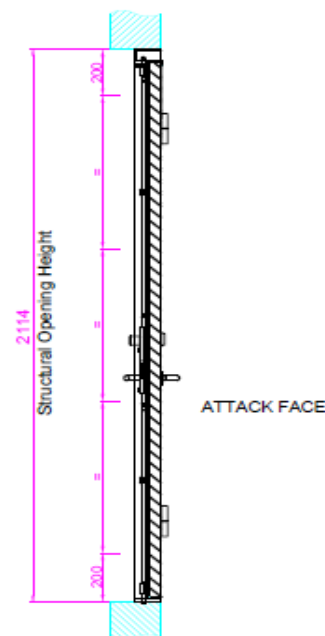


Structure depth to be confirmed- must be minimum of 130mm if set back 20mm.

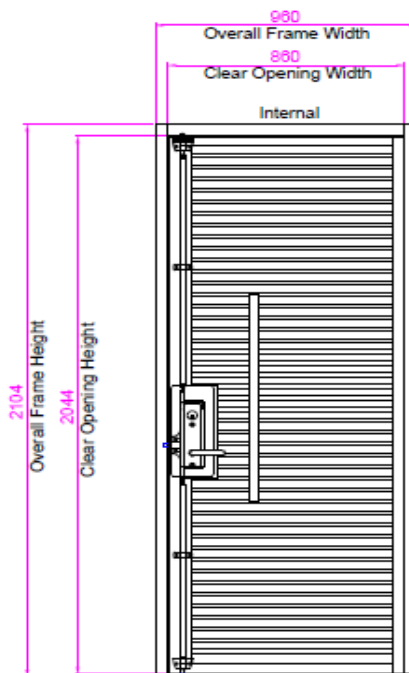

INTERNAL & EXTERNAL LOCK OPTIONS	
Surelock McGIII Slimline SL311 In stainless steel, three point manual deadlocking & auto bolting locking system; Internal Abloy Protec2 CY405 Rim cylinder and lever handle; external SR3 cylinder guard with Abloy Protec2 CY405 Rim cylinder and lever handle; Internal and external cylinders keyed alike	
THE DOOR IS ONLY 'LPS1175 Issue 7 SR2' RATED WHEN THE LOCK IS ENGAGED BY THE KEY	

COMMENTS	
2 No. Standard keys Facilities for Earthing Straps to each leaf	

IMPORTANT	
A suitable substrate must be constructed to ensure the appropriate support is attained over the length of the frame threshold of door or louvre to accommodate fixings for secure, safe, installation and operation.	
Gaps in excess of 10mm between the frame and structure will need to be finished by site	
All ironmongery to be fitted to doorset as shown	

LPCB SECURITY RATING TO LPS 1175 Issue 7					
SR1	SR2	SR3	SR4	SR5	SR6
	✓				

HANDING AS VIEWED WITH DOOR OPENING TOWARDS YOU	
LEFT HAND HUNG	RIGHT HAND HUNG
✓	

MESHING	
1/2" x 1/2" - 16 swg Anti Vermin Meshing To Rear Of Louvered Area	

FINISH		
POWDER COATED		
FRAME	RAL	7022 ~ MATT
LEAF	RAL	7022 ~ MATT

A	01/07/02	ORIGINAL	MR	
REV	DATE	DESCRIPTION	DRAWN	APPROV
CLIENT:-		Jack Arnold UK Ltd		
SITE:-		HORNSEY TOWN HALL		
QUOTE No:-		76881		
ITEM REF:-		D.L.G.01		
LINE No:-		1	QUANTITY:-	1
CLIENTS APPROVAL SIGNATURE				
PRINT NAME				
APPROVAL DATE				



DRAWING TITLE
Louvre® Door

DRAWING NUMBER	
76881-1	
SCALE :-	DRAWN BY :- MB
NOT TO SCALE	
THIS PRINT IS LOANED - NOT GIVEN SOLELY FOR YOUR CONFIDENTIAL INFORMATION AND MUST NOT BE COPIED OR REPRODUCED NOR ANY INFORMATION DISCLOSED WITHOUT THE WRITTEN CONSENT	