



LC/SC Axial Range

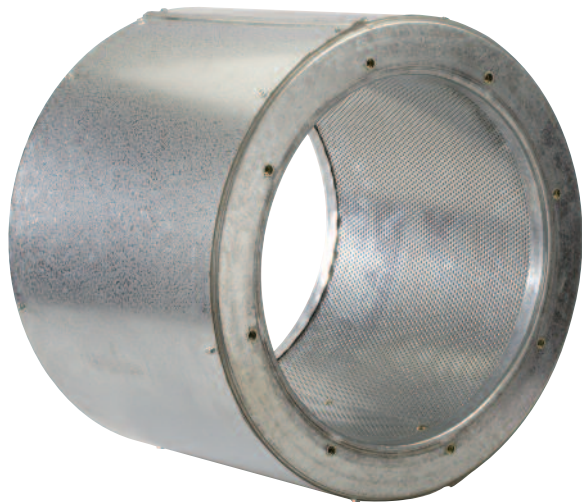

- Pre-galvanised sheet steel with perforated steel lining
- Infill of glass tissue faced high density mineral wool
- For saturated or other special applications please refer to Elta

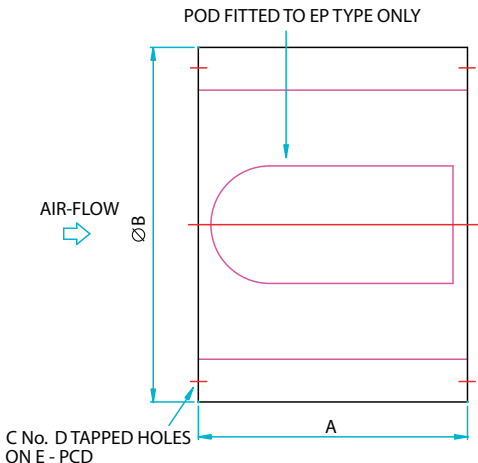

Product Code	Fan Dia	A 1D	A 2D	B	C	D	E	Weight kg			
								1DENP	1DEP	2DENP	2DEP
068-0315-*D**P	315	315	630	417	8	M8	355	9	11	15	17
068-0355-*D**P	355	350	700	452	8	M8	395	11	13	18	21
068-0400-*D**P	400	400	800	500	8	M10	450	13	16	22	26
068-0450-*D**P	450	450	900	602	8	M10	500	15	18	27	31
068-0500-*D**P	500	500	1000	652	12	M10	560	18	22	32	37
068-0560-*D**P	560	560	1120	712	12	M10	620	22	26	39	46
068-0630-*D**P	630	630	1260	782	12	M10	690	26	32	48	57
068-0710-*D**P	710	710	1420	862	16	M10	770	32	39	59	71
068-0800-*D**P	800	800	1600	952	16	M10	860	40	49	74	90
068-0900-*D**P	900	900	1800	1102	16	M12	970	55	67	102	123
068-1000-*D**P	1000	1000	2000	1202	16	M12	1070	66	82	124	151
068-1120-*D**P	1120	1120	2240	1322	20	M12	1190	73	90	138	168
068-1250-*D**P	1250	1250	2500	1452	20	M12	1320	80	100	151	185
068-1400-*D**P	1400	1400	-	1602	20	M12	1470	162	210	-	-
068-1600-*D**P	1600	1600	-	1802	24	M16	1680	210	273	-	-
068-1800-*D**P	1800	1800	-	2002	24	M16	1880	260	338	-	-
068-2000-*D**P	2000	2000	-	2202	24	M16	2080	320	416	-	-

1 or 2
SEE DIM 'A' → E = WITH POD or
← EN = WITHOUT POD