


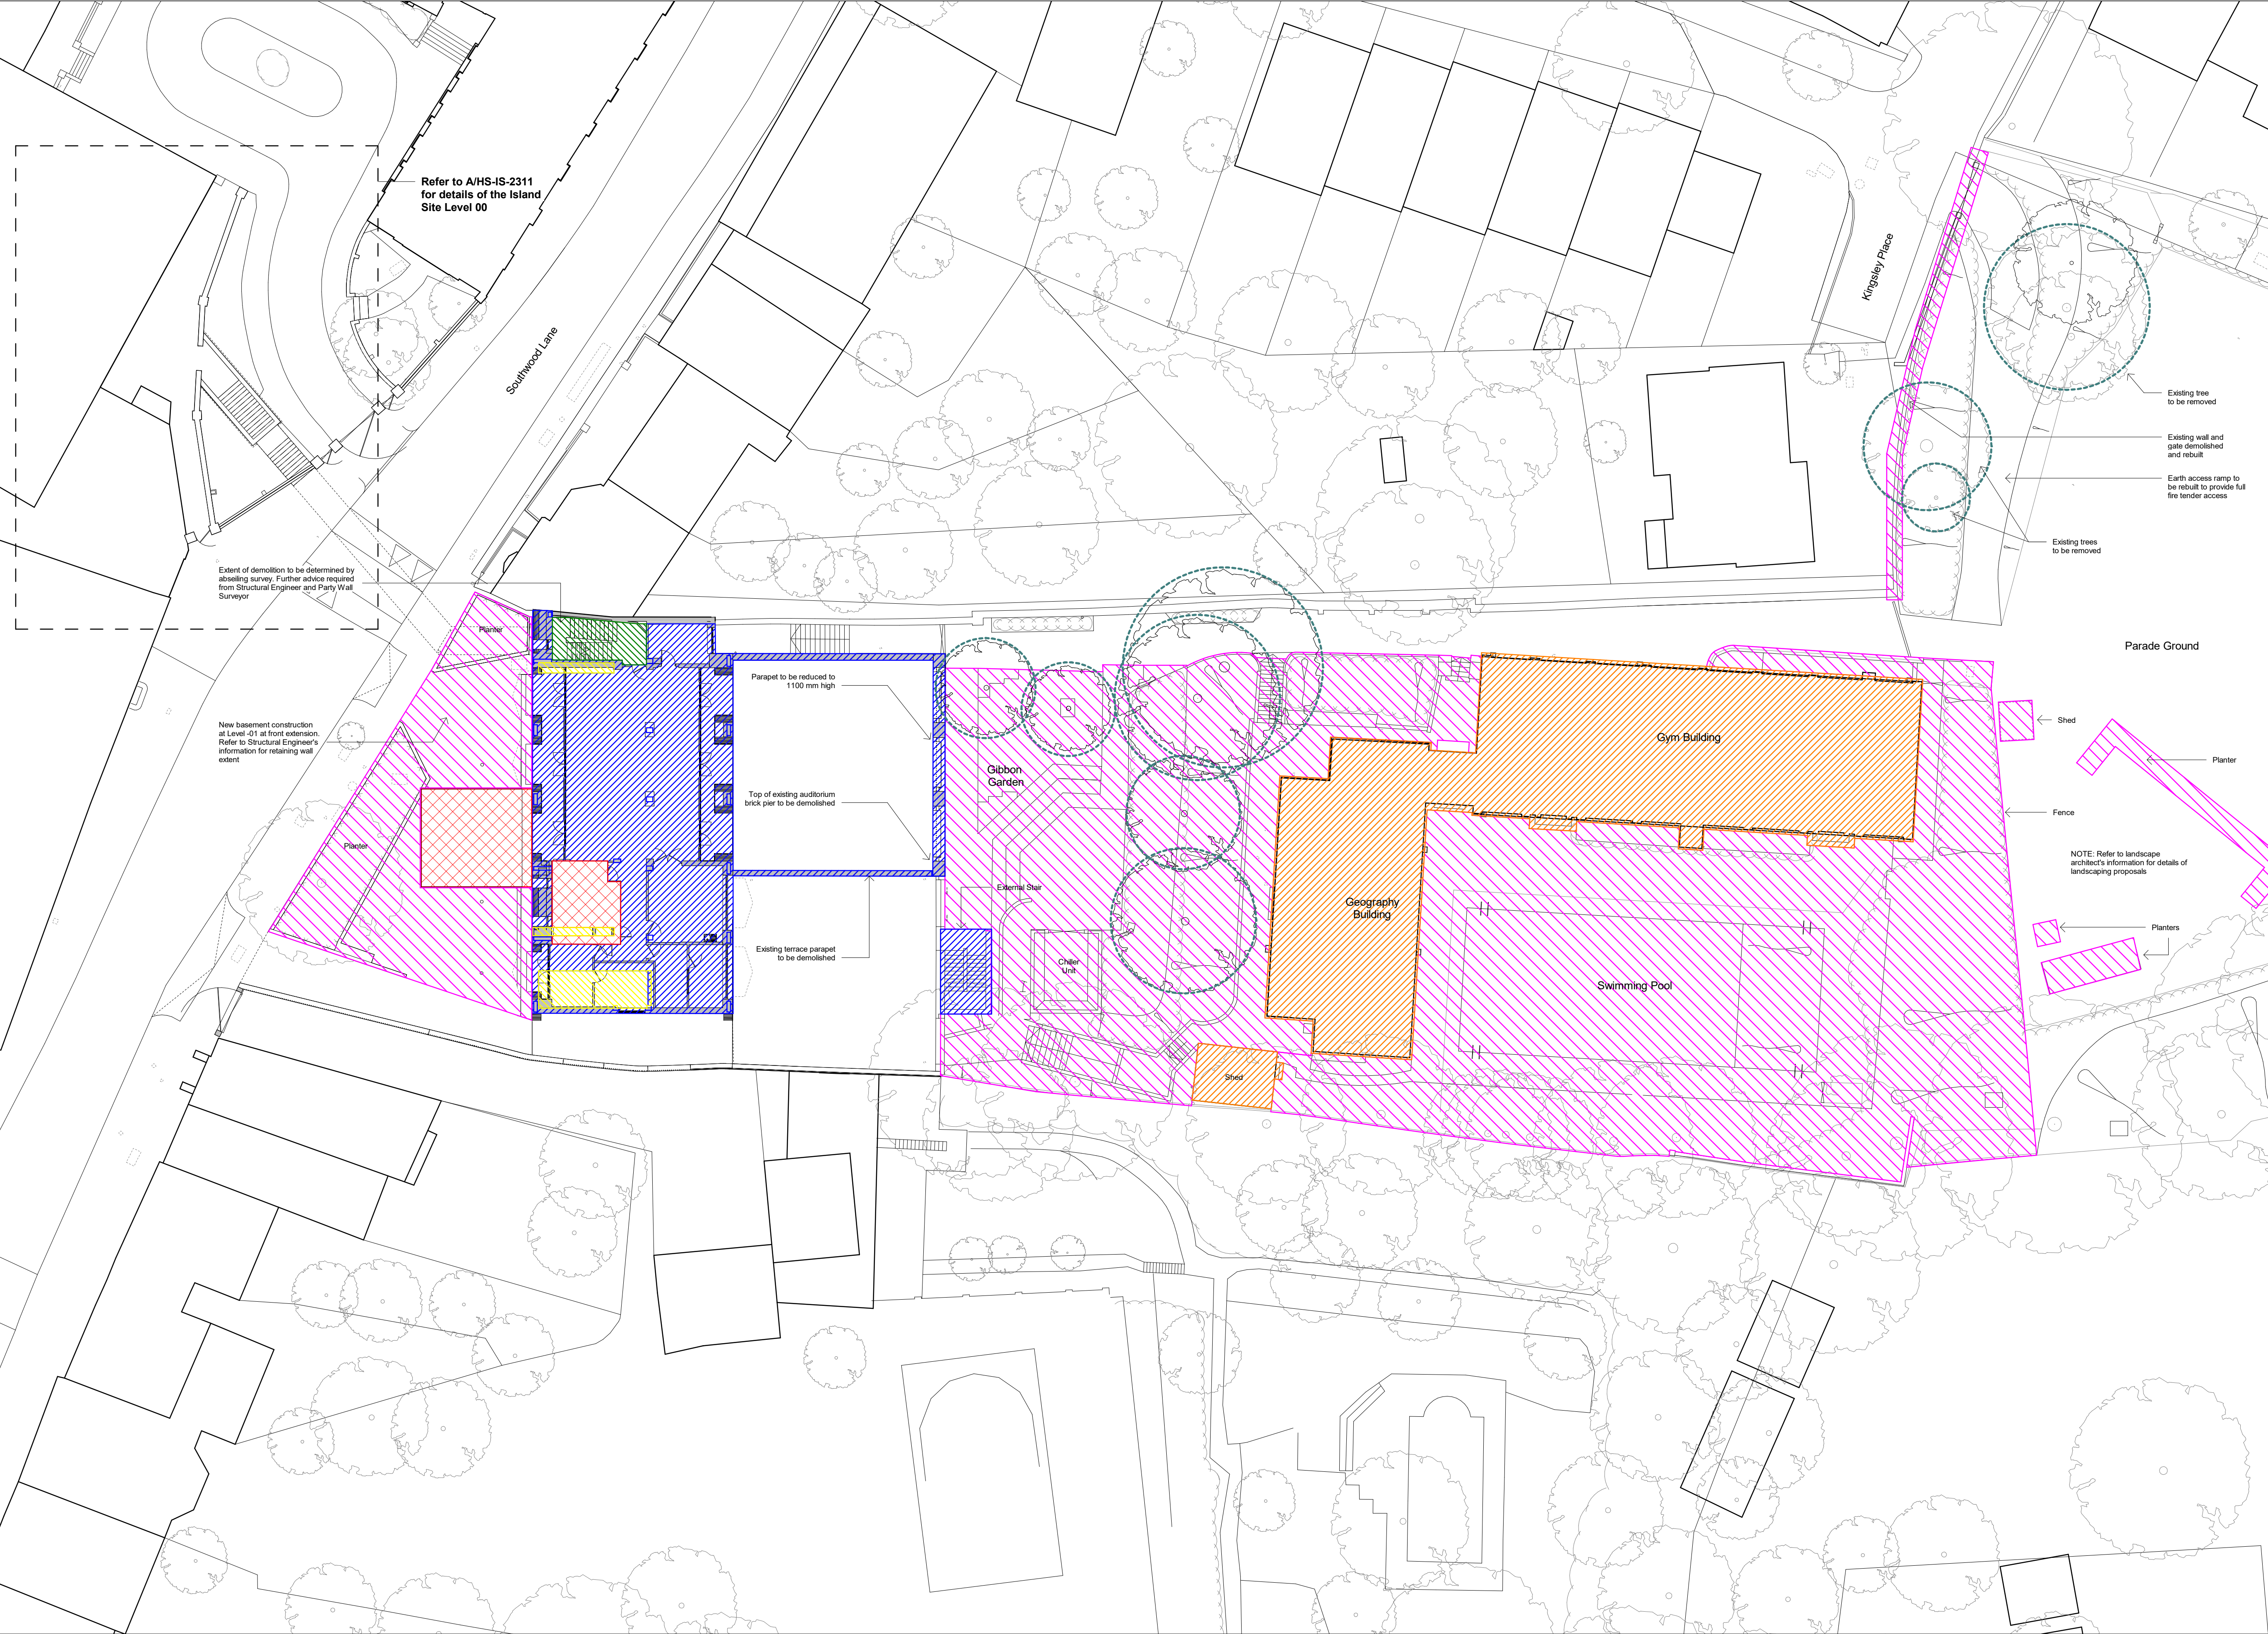

General Notes:

G1 All Levels are above ordnance datum (AOD)
New Levels are shown thus: [Symbol] EX+20.345
Retained Existing Levels thus: [Symbol] EX+20.345
Existing Levels are shown: [Symbol] EX+20.345


G2 Door tags are shown thus: [Symbol] DG-011 ← Door number
[Symbol] DRS-XXX ← Door type
[Symbol] FR-XXX ← Fire rating, 'V' denotes smoke seal

G3 Abbreviations:
GN/AWC: Gender Neutral / Accessible WC
CS: Cleaner's Store
PH: Printer hub
ST: Store
RWP: Rain water pipe

KEY - DEMOLITION PLAN:	
[Pink hatched box]	Existing structures, hard standings, scrub and vegetation removal, excluding trees and boundary walls.
[Orange hatched box]	Existing buildings to be demolished
[Blue hatched box]	Existing Dyne House strip out and facade removal. Northern staircase to be retained
[Red hatched box]	Existing Dyne House structural demolition, including existing stair and lift core, structural slab
[Green hatched box]	Existing spaces to be retained
[Yellow hatched box]	Penetration through existing Dyne House slab to form new risers (1 & 2) and new southern stair
[Dashed green box]	Refer to drawing 2112 for forecourt, Gibbon Garden, trees and rear demolition information
[Green circle]	Existing trees to be removed

00

PLANNING

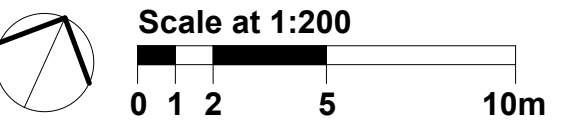

Work Package	Cost Check	Info/Briefing	Tender	Contract	Construction	Date 13.01.2023	Rev. G	Description ISS 0004_Planning Issue	Approved By MB	Date	Rev.	Description	Approved By	Project Highgate School Dyne House 3	Sort Code A/Hs-DH3	Drawing Number 2322	Rev. G
														Subject Dyne House - Level 00 Demolition Plans			
														Architects Hopkins Architects Limited 27 Broadley Terrace, London, NW1 6LG T: 020 7724 1751 E: mail@hopkins.co.uk	Date: 03/15/17	Scale: 1 : 200	at A1