


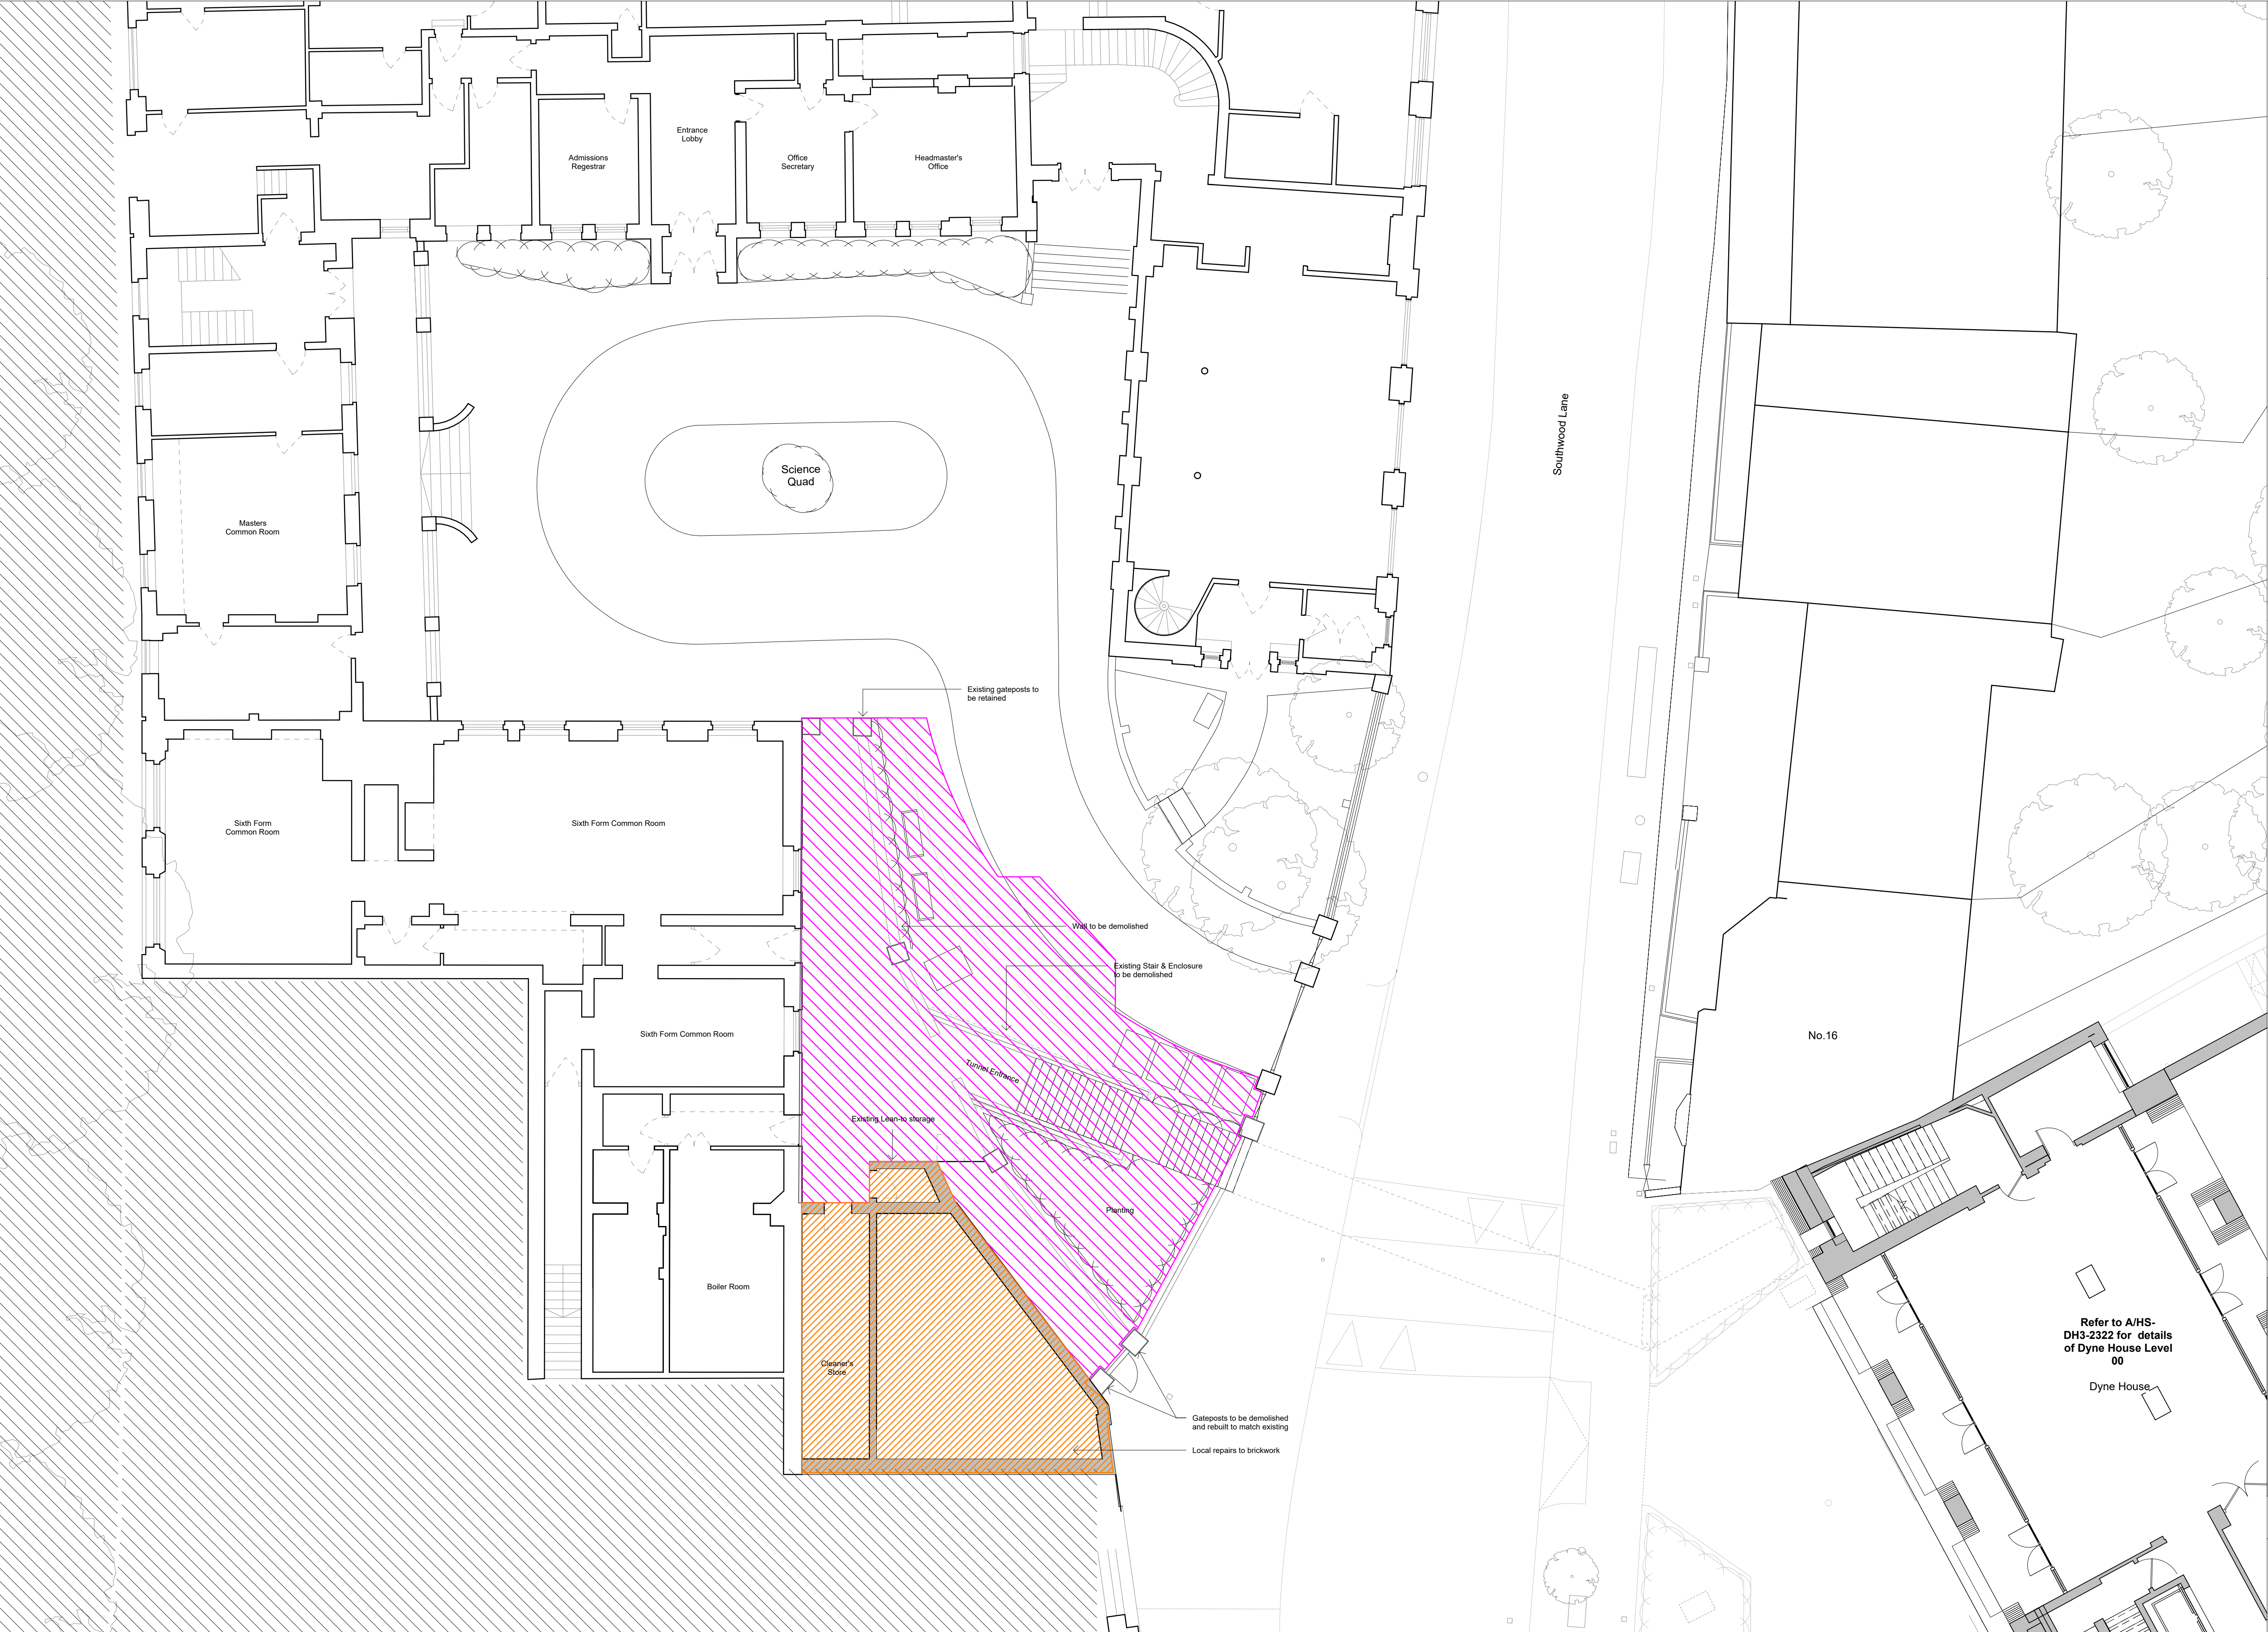

- General Notes:**
- G1** All Levels are above ordnance datum (AOD)
New Levels are shown thus: +20.345
Retained Existing Levels thus: EX+20.345
Existing Levels are shown: EX+20.345
- G2** Door tags are shown thus: DG-01 DRS-XXX FR-XXS
Door number
Instance of doors per room
Door type
Fire rating, 'V' denotes smoke seal
- G3** Abbreviations:
GN/AWC: Gender Neutral / Accessible WC
CS: Cleaner's Store
PH: Printer hub
ST: Store
RWP: Rain water pipe

- KEY - DEMOLITION PLAN:**
- Pink hatched box Existing structures, hard standings, scrub and vegetation removal, excluding trees and boundary walls.
 - Orange hatched box Existing buildings to be demolished
 - Blue hatched box Existing Dyne House strip out and facade removal. Northern staircase to be retained
 - Red hatched box Existing Dyne House structural demolition, including existing stair and lift core, structural slab
 - Green hatched box Existing spaces to be retained
 - Yellow hatched box Penetration through existing Dyne House slab to form new risers (1 & 2) and new southern stair
 - Dashed green box Refer to drawing 2112 for forecourt, Gibbon Garden, trees and rear demolition information
 - Blue dashed circle Existing trees to be removed


- Refer to drawing A/HS-DH3-2000 for Site Application and Ownershp boundaries

00

Refer to A/HS-DH3-2322 for details of Dyne House Level 00

Dyne House

PLANNING

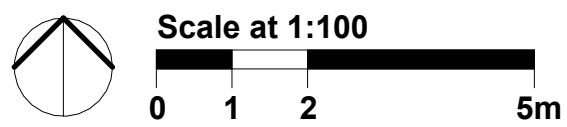

Work Package	Cost Check	Info/Briefing	Tender	Contract	Construction	Date	Rev.	Description	Approved By	Date	Rev.	Description	Approved By	Project	Highgate School Island Site	Sort Code	Drawing Number	Rev.
						13.01.2023	D	ISS 0004_Planning Issue	MB					Subject	Island Site - Level 00 Demolition Plans	A/HS-IS	2311	D
														Architects	Hopkins Architects Limited 27 Broadley Terrace, London, NW1 6LG T: 020 7724 1751 E: mail@hopkins.co.uk	Date: 05/15/19	Scale: As indicated	A1