

# Entrance Doors TOTAL70

Available in a wide range of colour options, REHAU Entrance Doors will meet all requirements, making them a natural choice for the specifier and trade markets, where they can be utilised in new build and refurbishment projects.



## Characteristics

REHAU entrance doors comprise a range of multi-chambered profiles that are designed to meet the requirements of the new build, commercial and domestic refurbishment markets and allow for excellent thermal insulation.

With a choice of chamfered profiles using TOTAL70C or fully sculptured using TOTAL70S, there is a full range and has a full range of ancillary profiles for all installation requirements.

The 70mm door system allows the latest security hardware to be fitted and features pre-routed steel on locking side for continuous reinforcement.

Both designs are available in a range of foil laminate options allowing for complete personalised profile design. Our complete range of foil laminate options can be seen on our colour page or the REHAU Colour Brochure.





#### Entrance Doors TOTAL70

The 70mm door system allows the latest security hardware to be fitted, ensuring Part Q compliance of the building regulations.


## Entrance Doors TOTAL70

- 1 Open-in and open-out styles available for a variety of installations
- 2 Can accommodate most standard locking mechanisms including high security bolt systems, flag and butt hinges
- 3 Pre-routed reinforcement on locking side ensures continuous reinforcement
- 4 Choice of chamfered or sculptured profiles available

| Feature             | Specification                               |
|---------------------|---------------------------------------------|
| Profile depth       | 70mm                                        |
| Maximum door size   | 1000 x 2200mm                               |
| Thermal performance | Exceeds 1.0 W/m <sup>2</sup> K              |
| Maximum sash weight | 100kg                                       |
| Glass Width         | 4 – 44mm                                    |
| Further options     | Low threshold options for Part M compliance |
| Accreditations      | See page 60                                 |



**Below:** open in vertical section

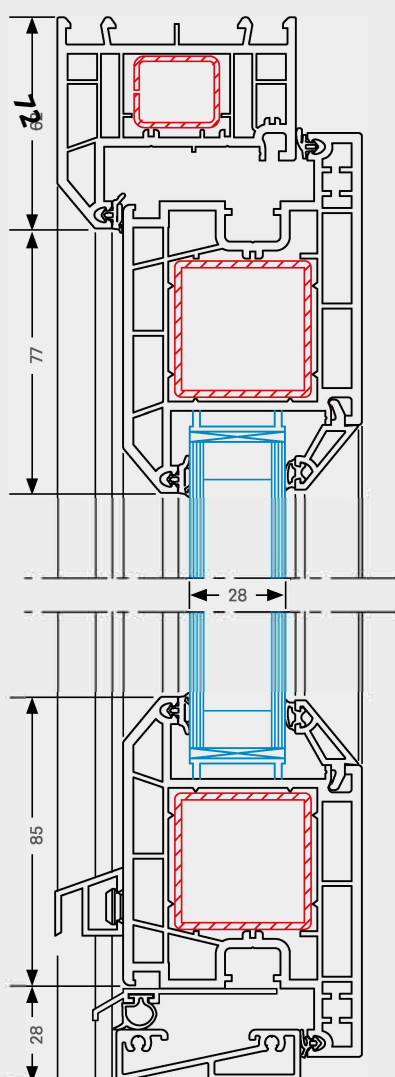

**Below:** open out vertical section

