

Flat 7
Proposals
(Supplemental)

Flooring specification

Marmoleum floating floor on a laminated acoustic mat in areas that are currently cork.
The existing cork is not original, it is directly bonded onto the concrete floor.

The proposal is to cover the concrete floor with Marmoleum Decibel flooring using a removable adhesive (Bostik R3Bond) This adhesive is designed to bond to the applied flooring preferentially to the substrate so that it does not damage the substrate surface.
This is a laminated product that is a total of 3.5mm thickness.
The appearance of the Marmoleum (fossil 370835) is similar in colour and texture to cork

The thickness of the total build up means that the existing thresholds are all unaffected as they are within tolerance (the proposed build up being the same as for the cork tiles and adhesive.

R3BOND SYSTEM = ADHESIVE + GRID




SUITABLE FOR VINYL SOFT FLOORING



3 STEPS ONE MAJOR BREAKTHROUGH


R3MOVE

A vinyl flooring installed with R3BOND® can be easily removed. Even years after installation, the old floor covering can be removed without any adhesive residue on its backing.

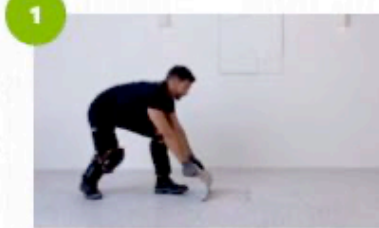


R3COVER

The subfloor can be recovered with no adhesive residue or damage. Minimal to no preparation of the flooring is needed for the next installation.

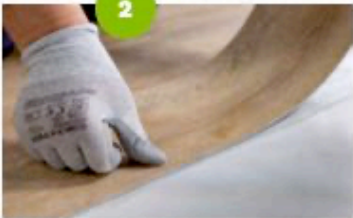

R3CYCLE

Free from adhesive residue, the old flooring can be sent for recycling and given a second lease on life after removal. Reach out to your trusted recycling partner to ensure valuable materials don't go to waste.

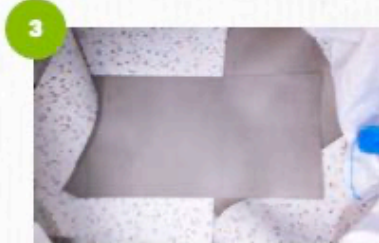

R3BOND® IS A UNIQUE PATENTED SOFT FLOORING SYSTEM ENABLING EASY FLOORING REMOVAL, RECYCLING AND CLEAN SUBFLOOR RECOVERY.

marmoleum
decibel

Within our linoleum flooring range, Marmoleum Decibel provides the highest impact sound reduction of 18 dB.

This sustainable acoustic flooring consists of 2.5 mm Marmoleum laminated onto a 1 mm layer of polyolefin foam. Available in 27 colours selected from the [Marmoleum Marbled](#) and [Solid](#) collections.

The Marmoleum Decibel construction is also possible on request for other Marmoleum colours. This is subject to a minimum order quantity and lead time. Please contact your local customer service office for more information.


Please note roll sizes may vary.

To order free samples of Marmoleum Decibel, please [CLICK HERE](#)


MORE FROM FORBO: Everything you need to know about our high-quality commercial flooring & total flooring solutions.

370835 fossil

Thickness	3.5 mm
Length x width	≤ 33 m x 200 cm
NCS	S 4005-Y20R
LRV	34%
Recycled content	35%
Renewable electricity	100%
CO ₂ footprint (A1-A3)	-0.13 kg CO ₂ e/m ²

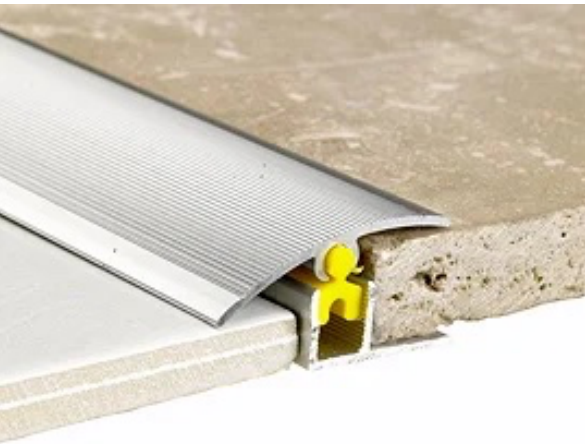

Adjustable height threshold to tiled areas which are expected to be as existing

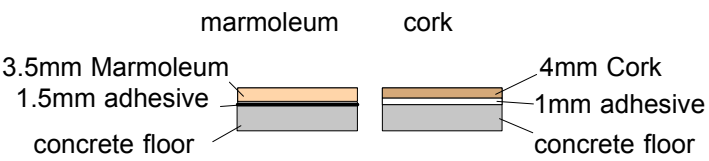

comparison of floor build up

Forbo Marmoleum Concrete "3708 Fossil" (2.5 mm)

Forbo | Linoleum Flooring Rolls

- ✓ Heavy-duty organic flooring
- ✓ 2m Width
- ✓ Glue down installation
- ✓ Cigarette burn resistance
- ✓ Delivery to Ireland and Norther Ireland is not available.

flooring flat 7 in Highpoint 1

CONSTANTINE ARCHITECTS

e. c@constantinearchitects.co.uk
m. 07958 455 245
w. www.constantinearchitects.co.uk