

AOEG18KATA

Please visit our webstore for full product and technical documentation 

Nominal Cooling Capacity	(kW)	5.2
Nominal Heating Capacity	(kW)	6.0
Height	(mm)	542
Width	(mm)	799
Depth	(mm)	290
Weight	(kg)	33
Airflow Rate - Cooling - High	(m3/h)	1710
Airflow Rate - Heating - High	(m3/h)	1840
Sound Pressure Level - Cooling - High	(dB(A))	51
Sound Pressure Level - Heating - High	(dB(A))	52
Sound Power Level - Cooling - High	(dB(A))	63
Sound Power Level - Heating - High	(dB(A))	64
Refrigerant Type (Global Warming Potential)		R32 (675)
Liquid Pipe Size		1/4"
Gas Pipe Size		1/2"
Min - Max Pipe Length	(m)	3 - 20
Max Height Difference	(m)	15
Refrigerant Charge (kg)	(kg)	0.9
Refrigerant CO2eq-T		0.608
Precharged For	(m)	15
Additional Charge (g/m)	(g/m)	20
Unit Power Supply		1Ph-230V-50Hz
Suggested Fuse Size	(A)	16
Cooling Mode Minimum Ambient	(°C)	-10
Cooling Mode Maximum Ambient	(°C)	46
Heating Mode Minimum Ambient	(°C)	-15
Heating Mode Maximum Ambient	(°C)	24



Document Downloads

[Accessories](#)
[Airflow](#)
[Capacity Correction](#)
[Dimensional Drawing](#)
[Electrical Characteristics](#)
[Installation Manual](#)
[Installation Space](#)
[Noise Curve](#)
[Product Image](#)
[Refrigerant Circuit](#)
[Spare Parts List All Pages](#)
[Specifications](#)
[Wiring Diagram](#)

Related Items

[AUXG18KVLA](#)

5.2kW Compact Cassette Indoor Unit - R32

[AUXG18KRLB](#)


5.2kW Circular Flow Cassette Indoor Unit - R32

[ARXG18KLLAP](#)


5.2kW Slim Ducted Indoor Unit - R32

[ABYG18KRTA](#)

5.2kW Ceiling Suspended Indoor Unit - R32

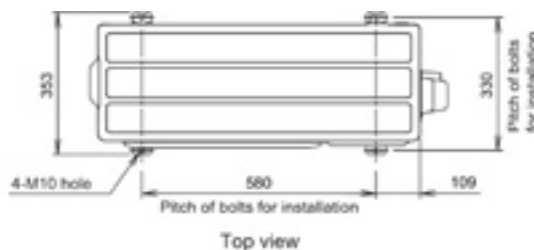

Top view

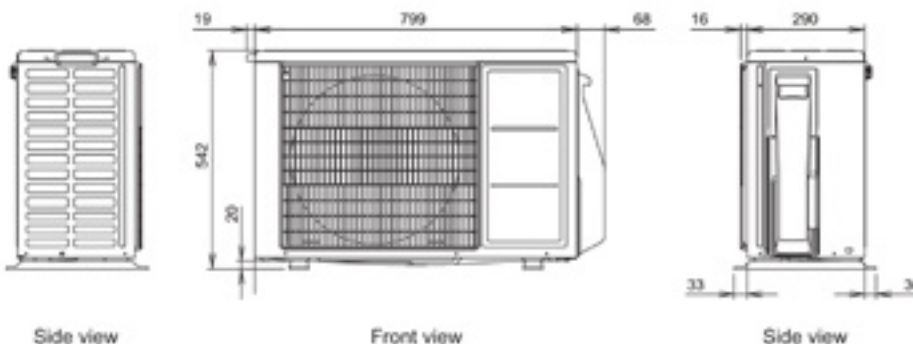

Side view

Front view

Side view

Units: mm

*Specifications and design are subject to change without notice for further improvement.

*Actual products' colors may be different from the colors shown in this printed material.