


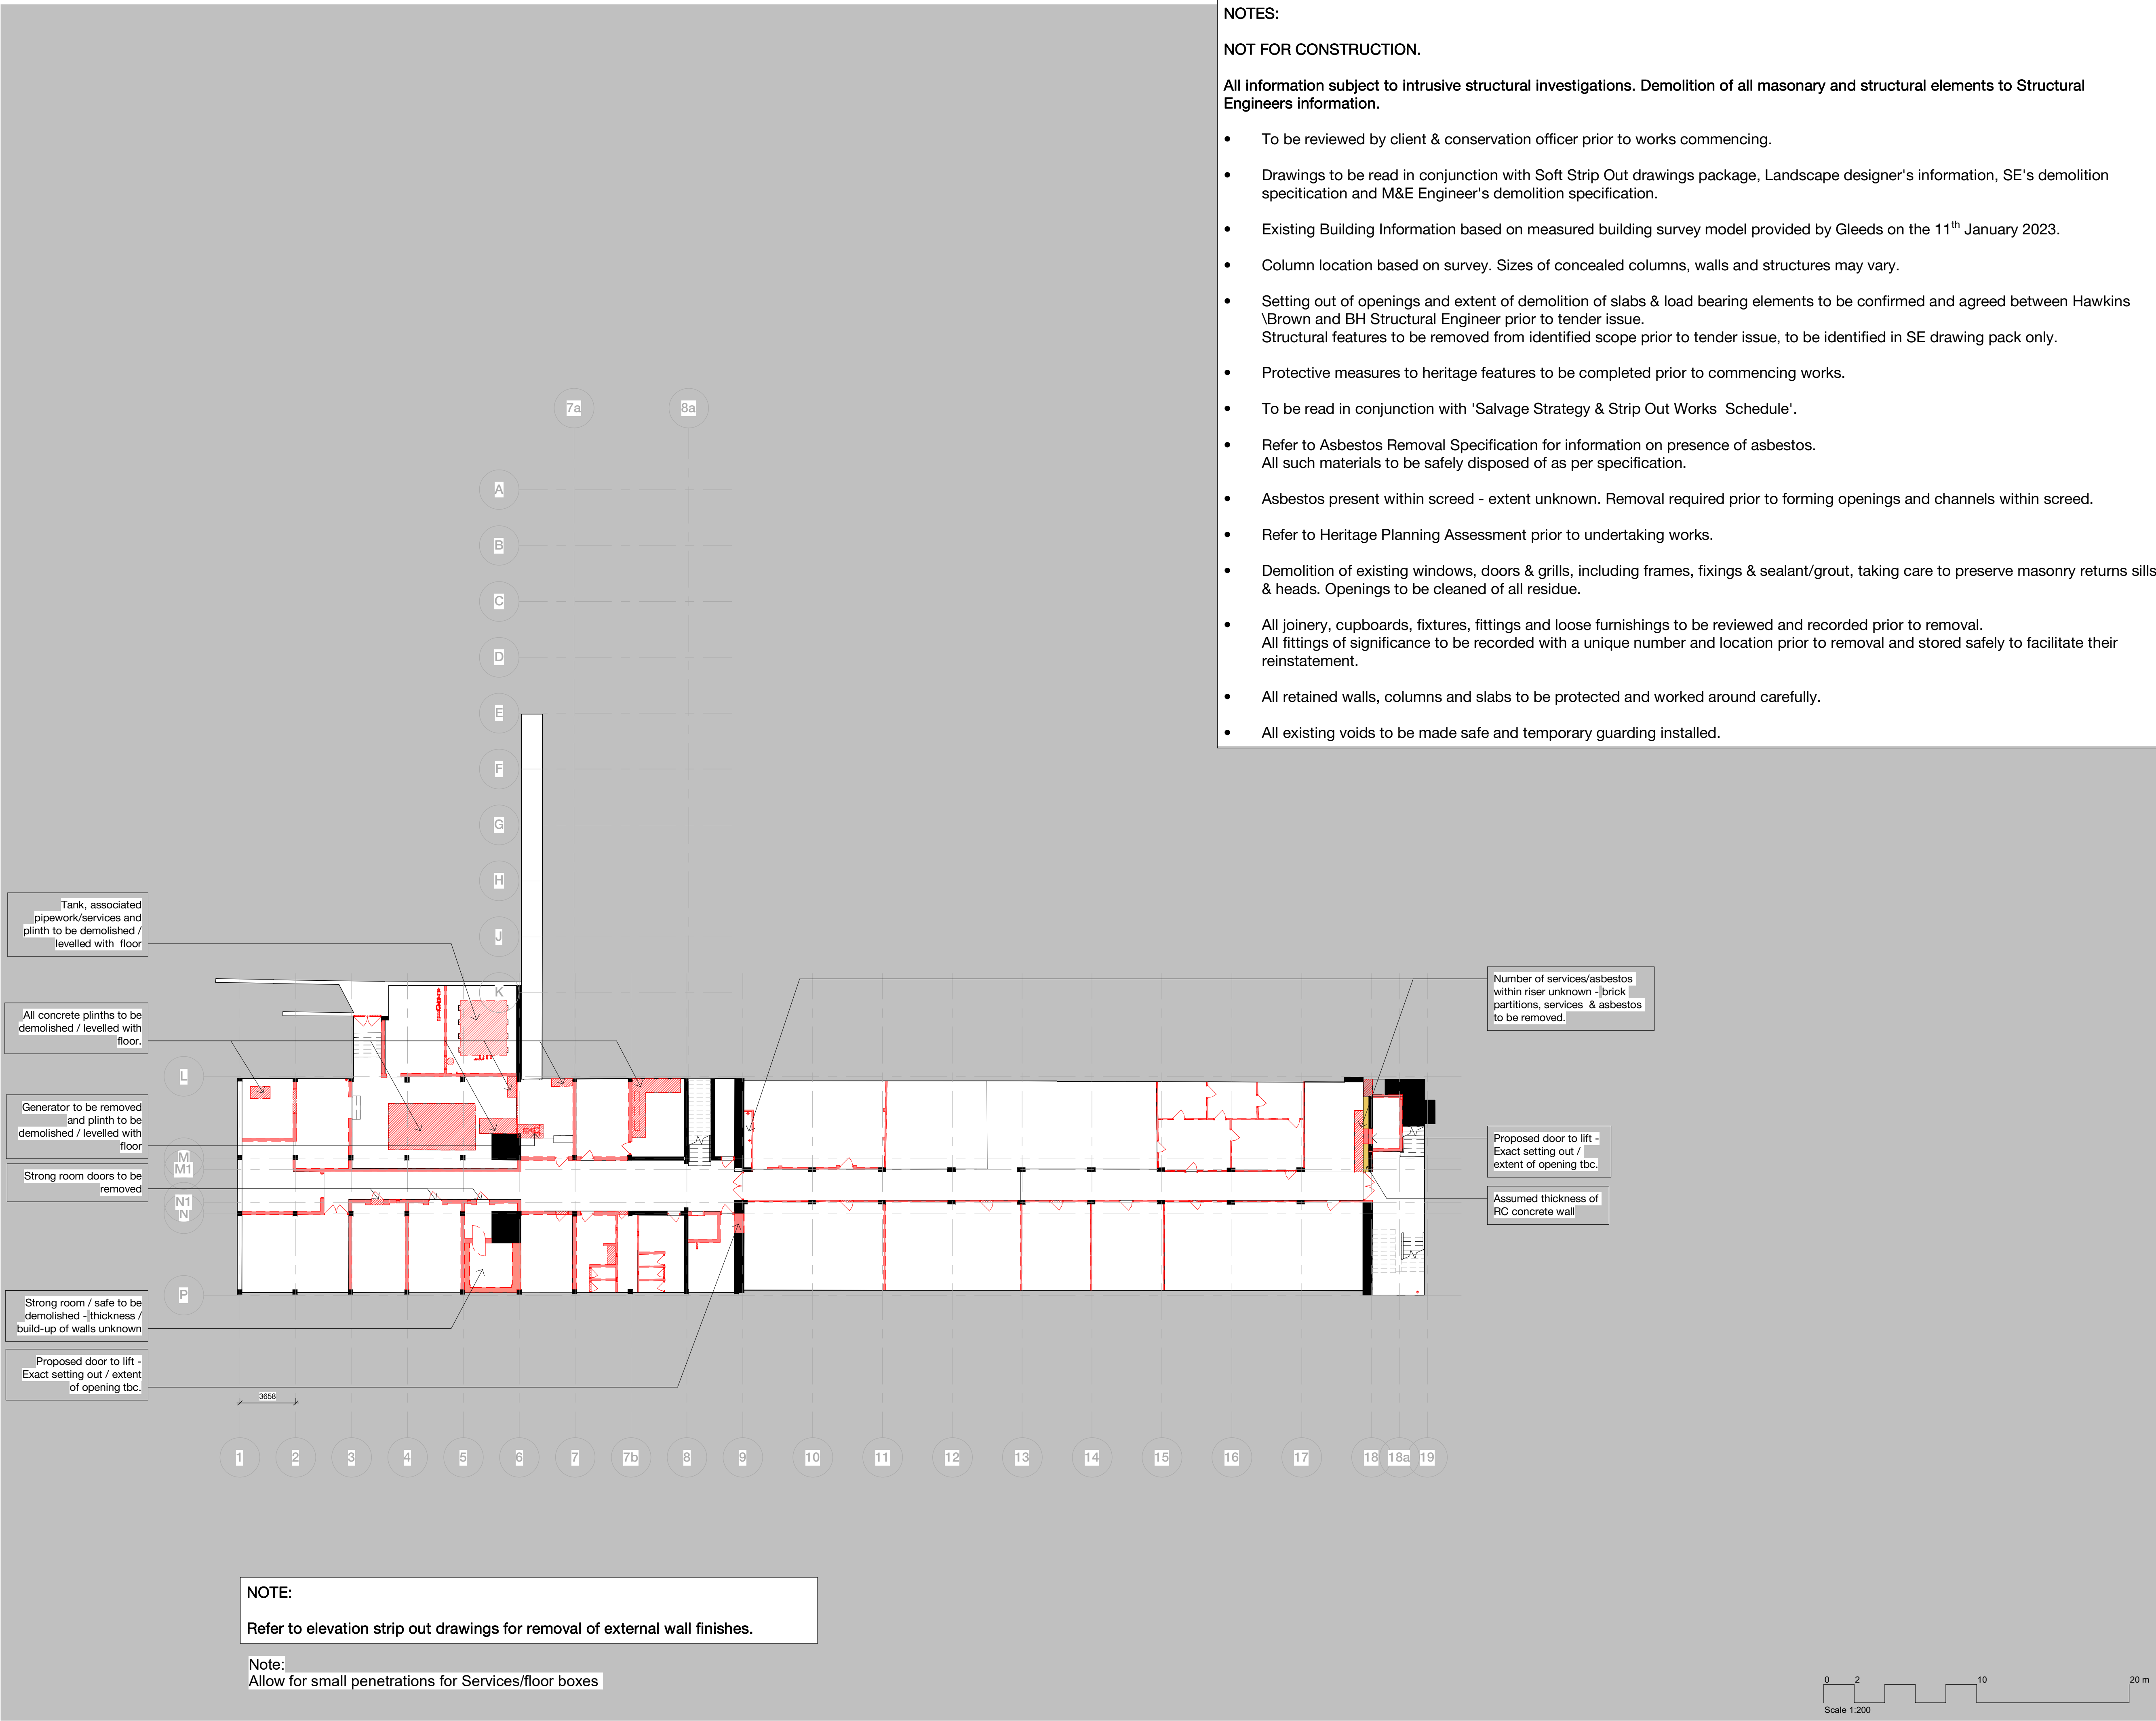

NOTES:

NOT FOR CONSTRUCTION.

All information subject to intrusive structural investigations. Demolition of all masonry and structural elements to Structural Engineers information.

- To be reviewed by client & conservation officer prior to works commencing.
- Drawings to be read in conjunction with Soft Strip Out drawings package, Landscape designer's information, SE's demolition specication and M&E Engineer's demolition specification.
- Existing Building Information based on measured building survey model provided by Gleeds on the 11th January 2023.
- Column location based on survey. Sizes of concealed columns, walls and structures may vary.
- Setting out of openings and extent of demolition of slabs & load bearing elements to be confirmed and agreed between Hawkins \Brown and BH Structural Engineer prior to tender issue. Structural features to be removed from identified scope prior to tender issue, to be identified in SE drawing pack only.
- Protective measures to heritage features to be completed prior to commencing works.
- To be read in conjunction with 'Salvage Strategy & Strip Out Works Schedule'.
- Refer to Asbestos Removal Specification for information on presence of asbestos. All such materials to be safely disposed of as per specification.
- Asbestos present within screed - extent unknown. Removal required prior to forming openings and channels within screed.
- Refer to Heritage Planning Assessment prior to undertaking works.
- Demolition of existing windows, doors & grills, including frames, fixings & sealant/grout, taking care to preserve masonry returns sills & heads. Openings to be cleaned of all residue.
- All joinery, cupboards, fixtures, fittings and loose furnishings to be reviewed and recorded prior to removal. All fittings of significance to be recorded with a unique number and location prior to removal and stored safely to facilitate their reinstatement.
- All retained walls, columns and slabs to be protected and worked around carefully.
- All existing voids to be made safe and temporary guarding installed.

Copyright Hawkins\Brown Architects
No implied licence exists. This drawing should not be used to calculate areas for the purposes of valuation. Do not scale this drawing. All dimensions to be checked on the site by the contractor and such dimensions to be their responsibility. All work must comply with relevant British Standards and Building Regulations requirements. Drawing errors and omissions to be reported to the architect. To be read in conjunction with Architect's specification and other consultant information.

Rev	Description	Date
P1	Planning Issue	05.04.23

KEY:

Extent of structure unknown

Areas of historic/heritage significance

Area of high heritage/historical significance

Area of medium heritage/historical significance

Strip out key

Element to be removed

Areas of roofing felt to be removed

Extent/setting out of proposed openings for lifts and risers.

Areas of external precast concrete panels to be removed. To be confirmed following PAYE investigations
- see 21 series - External Wall drawings for details.

Areas of external precast concrete panels to be removed
- see 21 series - External Wall drawings for details.

Areas of sacrificial internal joinery & in-situ RC concrete elements to be removed
- see 21 series - External Wall drawings for details.

159 St John Street
London EC1V 4QJ

mail@hawkinsbrown.com
hawkinsbrown.com

Hawkins\Brown

Project
Haringey Civic Centre
High Rd,
Wood Green,
N22 8LE

Drawing
Level B1 - Proposed Strip Out Plan

Scale @ A1 1 : 200		Date 15.03.23
Drawn By JR		Checked By JM
Job Number 190149	Status S2	Purpose of Issue Issued for Information
Drawing No. HCC-HBA-CC-B1-DR-A-008150		Rev P1