




Please note that the above diagram is for illustrative purposes only and is therefore not binding. The details shown in the diagram may differ from the actual properties of the product. This is particularly possible with regard to the colour and surface finish of the product. We therefore accept no liability for the properties of the product as shown in the diagram.

Exterior view

LPU 42	
Drawing number	LPU 42
Product version	Decograin
Surface	L-ribbed
Style	4500 mm x 2200 mm
Width x height	Night Oak
Colour	RAL 9002 Grey white
Interior colour	Without additional coating
Surface coating	1.98 W/(m²*K)
Thermal resistance	Aluminium frame: Adapted to Night Oak;
Non-standard colour	1.67 m²
Clear view	0 m²
Ventilation cross section	N
Track application	

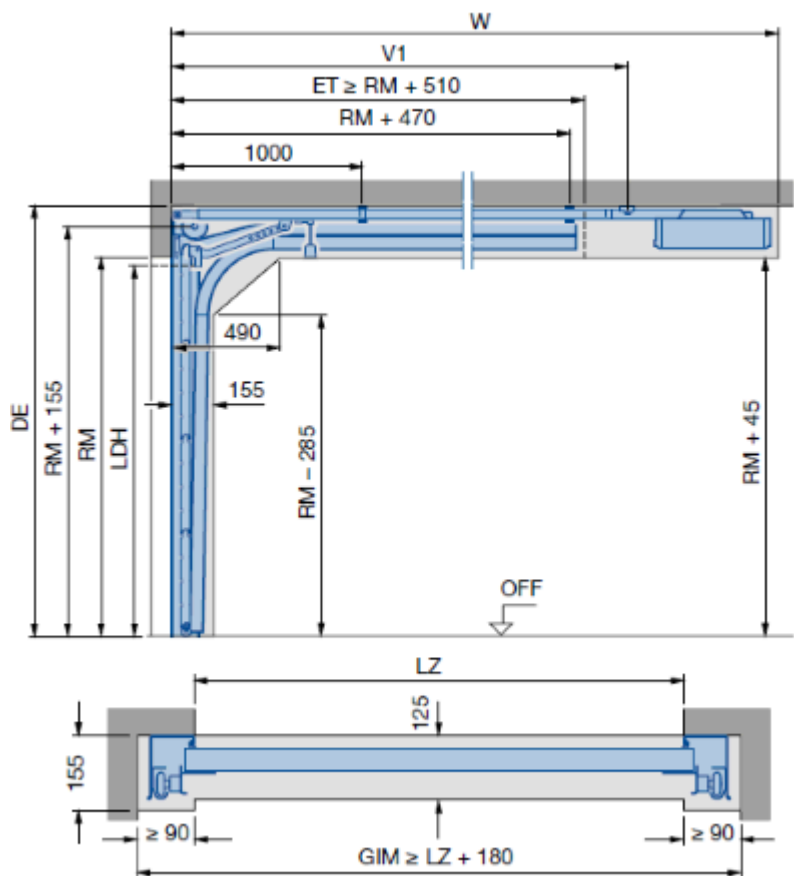

	Track application	N (Torsion spring)
LDB	Clear drive-through width	4500 mm
Clear passage height (LDH)	Clear drive-through height	2150 mm
	with operator	2200 mm
LZ	Width	4500 mm
RM	Height	2200 mm
ET min.	Min. distance back	2710 mm
Min. DE	Min. ceiling height	2410 mm
	with operator	2410 mm
GIM	Inside garage dimension min.	4680 mm
SAN min.	Sideroom min.	90.0 mm
Lintel	Min. lintel fitting	210 mm
	with operator	210 mm
V1	Rear operator boom suspension	2775 mm
W Min.	Distance back for operator	3200 mm
Note:	For the selected door configuration and under thermal loads, the door leaf reinforcement set for LPU42 should also be selected if possible. Please note the increased required headroom and position the operator boom 40 mm higher.	