


Downlights | 1 x powerLED 10 W DC 800 mA
90550M30

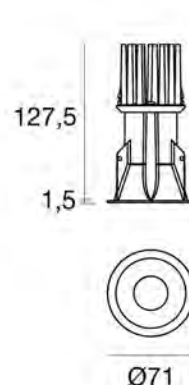

64

Technical Data	
Type	Recessed with flange
Installation position	Ceiling
Installation environment	Indoor
Safety class	3
IP	IP44
IP Optical compartment	IP65
Glow wire test	850°
Direct mounting on normally flammable surfaces	Yes
CE	Yes
Driver included	No
Dimmable article	DALI - 1-10V
Directional	No
Tilting	No
Walk-over	No
Drive-over	No
Cable included	Yes
Cable Length	0,17 m
Resin potting	No
Type of light emission	Single emission
Net weight	0.250 Kg
Electrostatic discharge protection	No
Surge protection	No
Optics	Flood
Product Features	TVS
Nominal power	10 W
Source lumens	1194 lumens
Input voltage range	800 mA

Finishes	
Material	Die-cast aluminum EN AB - 46100
Colour	Text white (R9003)
Processing	Coating

Diffuser Finish	
Material	UV-Resistant Polycarbonate
Colour	Transparent

Radiator finish	
Material	Die-cast aluminum EN AB - 46100
Colour	Tumbled Aluminum
Processing	Tumbling

Electronics



99135
On/Off Driver 198~264V AC (1 - 3 art.)



99345
DALI - Push and Simply Dim Multi Power 198~264V AC / V DC (1 - 3 art.)



99735
Multi Power 198~264V AC / 180~275V DC (1 art.)



99733
1-10V Multi Power 198~264V AC / V DC (1 art.)



99731
DALI - Push and Simply Dim Controller 198~264V AC / 180~275V DC (1 art.)



83232
DALI-2 Multi Power 198~264V AC / 176~280V DC (1 - 4 art.)