



3 8th Floor

3.2 Summary, 8th Floor

3.2.1 Result overview, Evaluation area 1

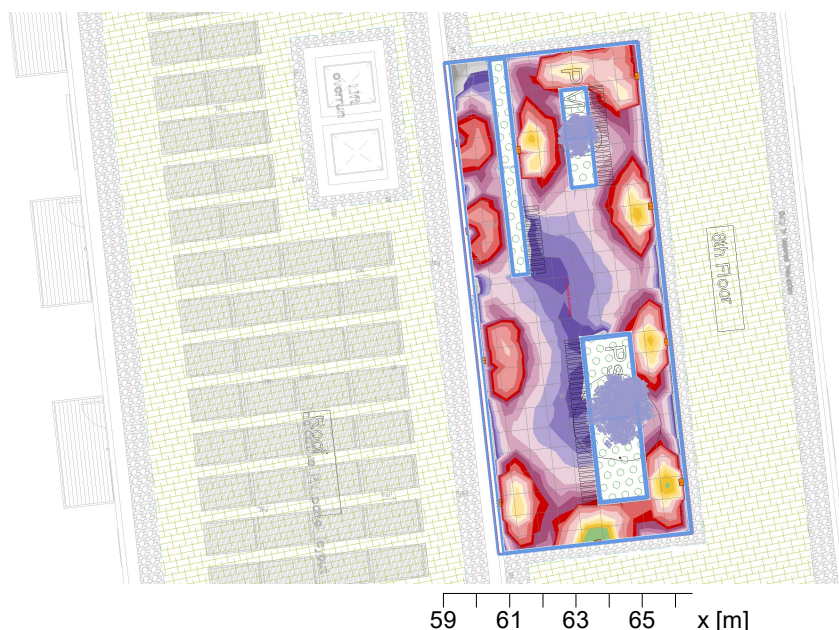

General

Calculation algorithm used
 Maintenance factor

Average indirect fraction
 0.80

Total luminous flux

5815.00 lm

Total power

117.4 W

Total power per area (87.79 m²)

1.34 W/m² (6.07 W/m²/100lx)

Evaluation area 1

Reference plane 1.1

Em

Horizontal

Emin

22 lx

Emin/Em (Uo)

0.3 lx

Emin/Emax (Ud)

0.01

Position

0.00

0.00 m

Type No. \ Make

1 9 x

Kosnic

Order No. : KWAL1090

Luminaire name : LED Amenity Exterior Wall Light - Haldon

Equipment : 1 x LED 9 W / 495 lm

2 2 x

Order No. : LDG10-BLK

Luminaire name : LED Amenity Exterior Bricklight - Ledge

Equipment : 1 x LED 10 W / 160 lm

Object : Roof Gardens
Installation : -
Project number : TC.PR142 - Wood Green
Date : 29.03.2023

3 8th Floor

3.2 Summary, 8th Floor


3.2.1 Result overview, Evaluation area 1

3 2 x **Astro Lighting Ltd**
 Order No. : !ASH/GU10
Luminaire name : Ashdown GU10 Spike
Equipment : 1 x 8.21 W / 520 lm

3 8th Floor

3.3 Calculation results, 8th Floor

3.3.1 Table, Reference plane 1.1 (E)

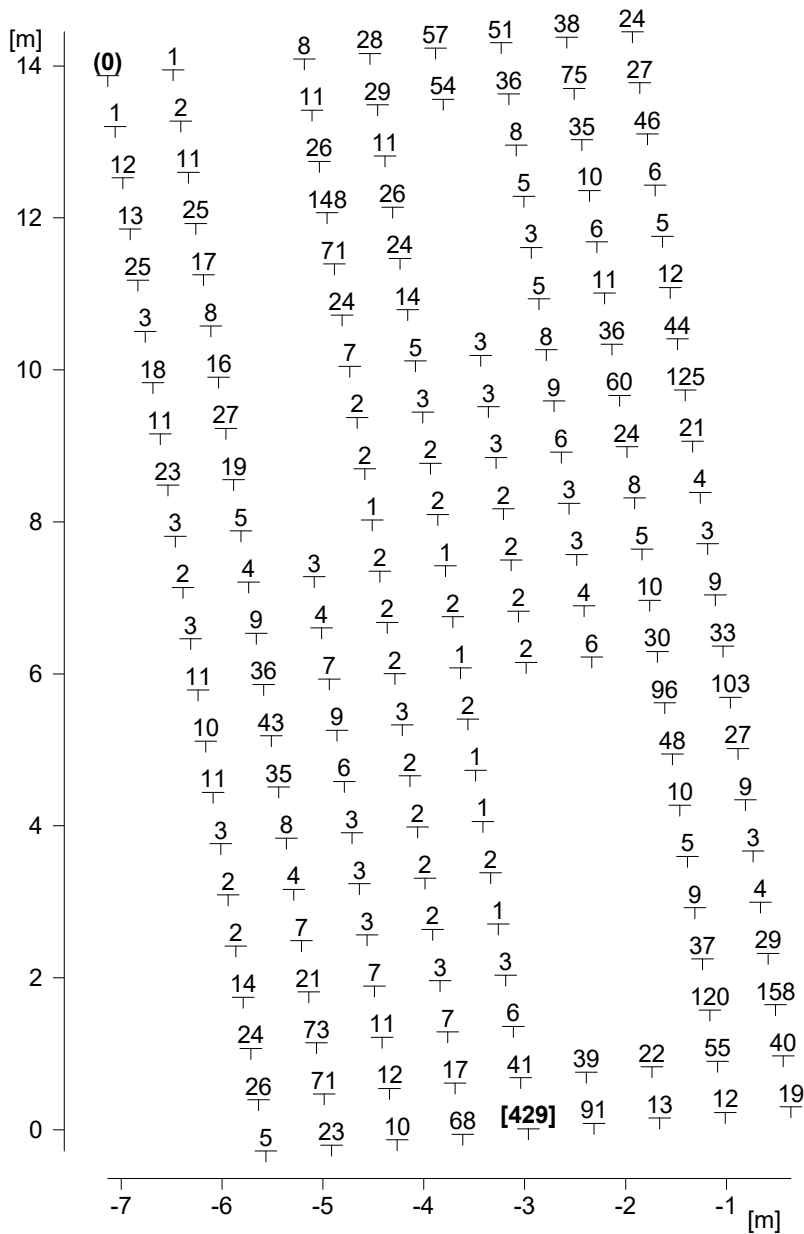

Height reference plane	: 0.00 m
Average illuminance	Em : 22 lx
Minimum illuminance	Emin : 0 lx
Maximum illuminance	Emax : 429 lx
Uniformity Uo	Emin/Em : 1 : 81.67 (0.01)
Diversity Ud	Emin/Emax : 1 : 1590.08 (0.00)

3.3 Calculation results, 8th Floor

3.3.2 3D luminance, View 1

