

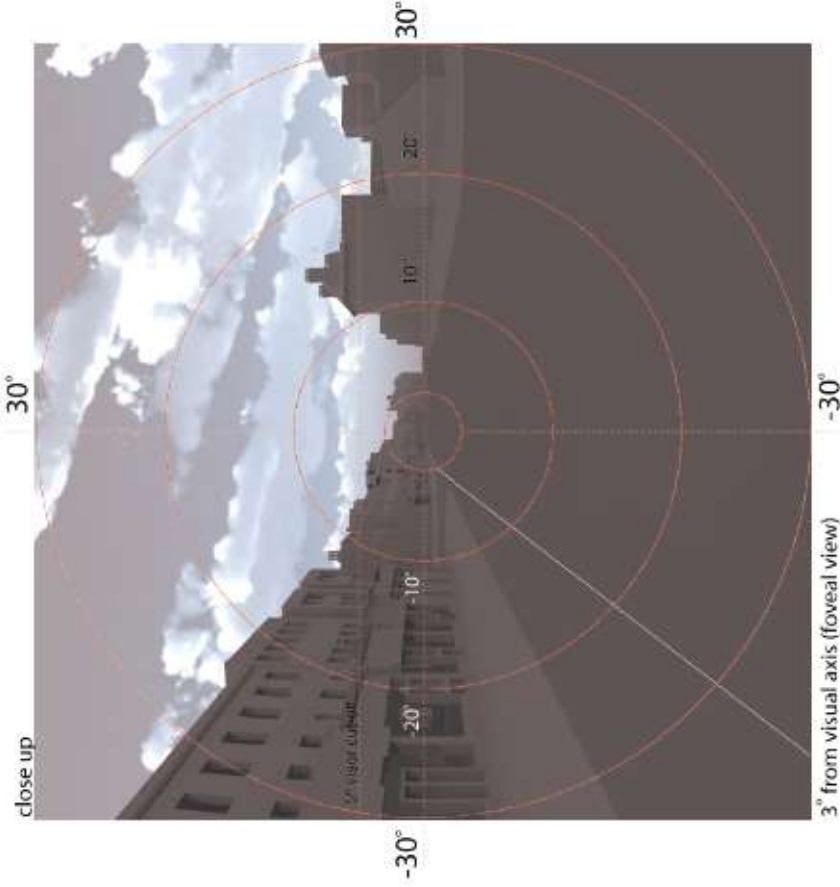


Figure 22: Solar Glare - Hours - 30 degrees close-up

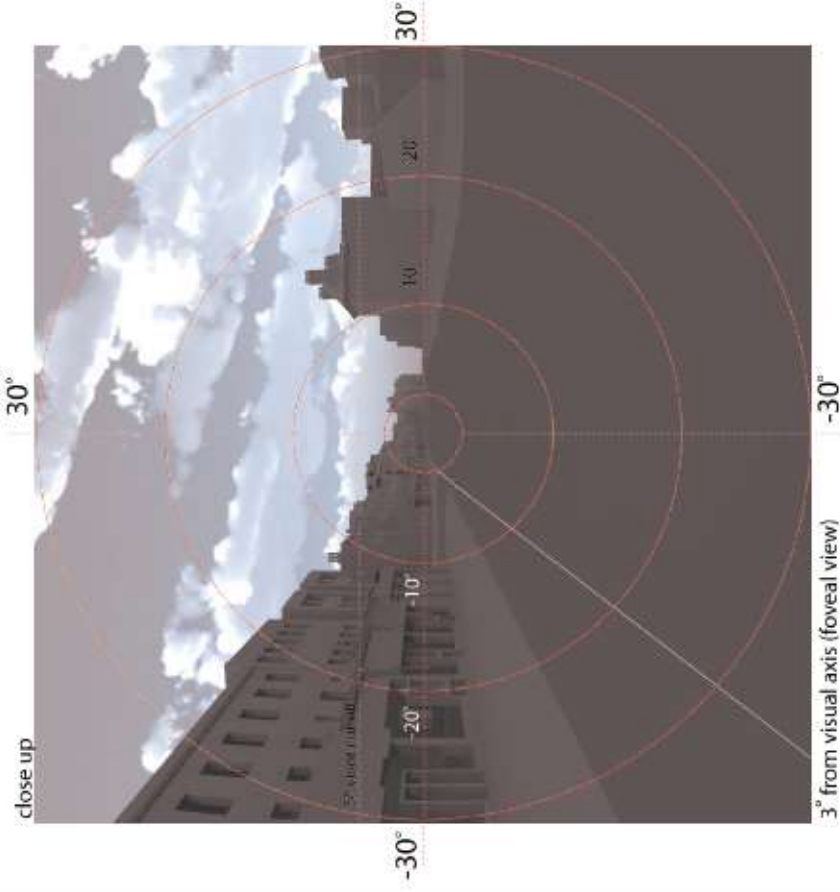




Figure 23: Solar Glare - Months - 30 degrees close-up





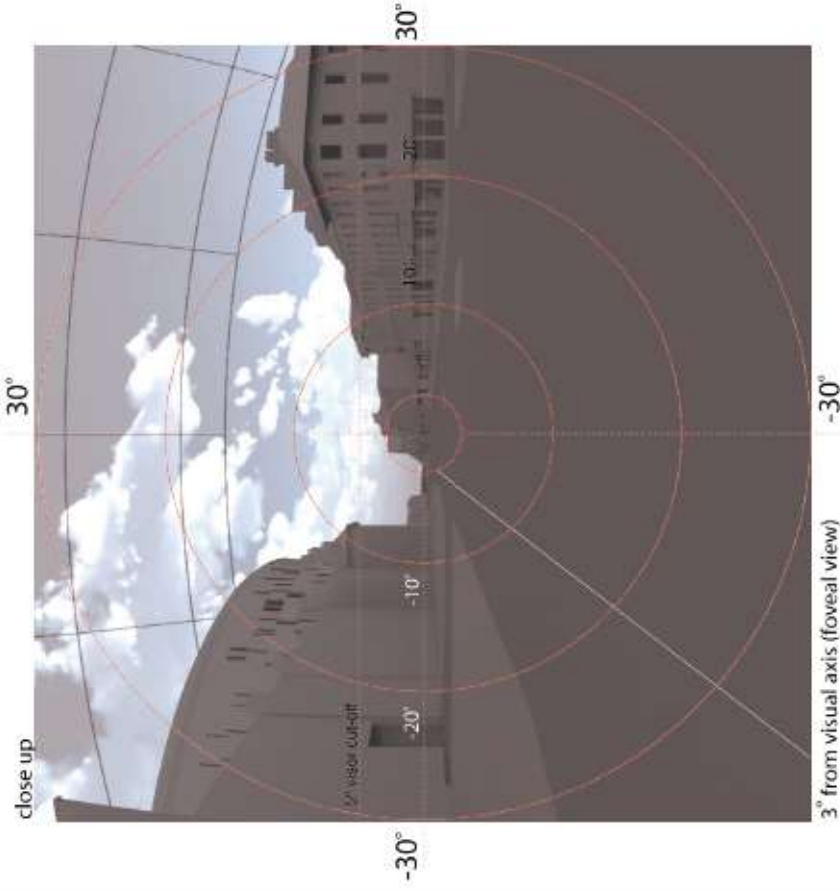


Figure 2a: Solar Glare - Hours - 30 degrees close-up

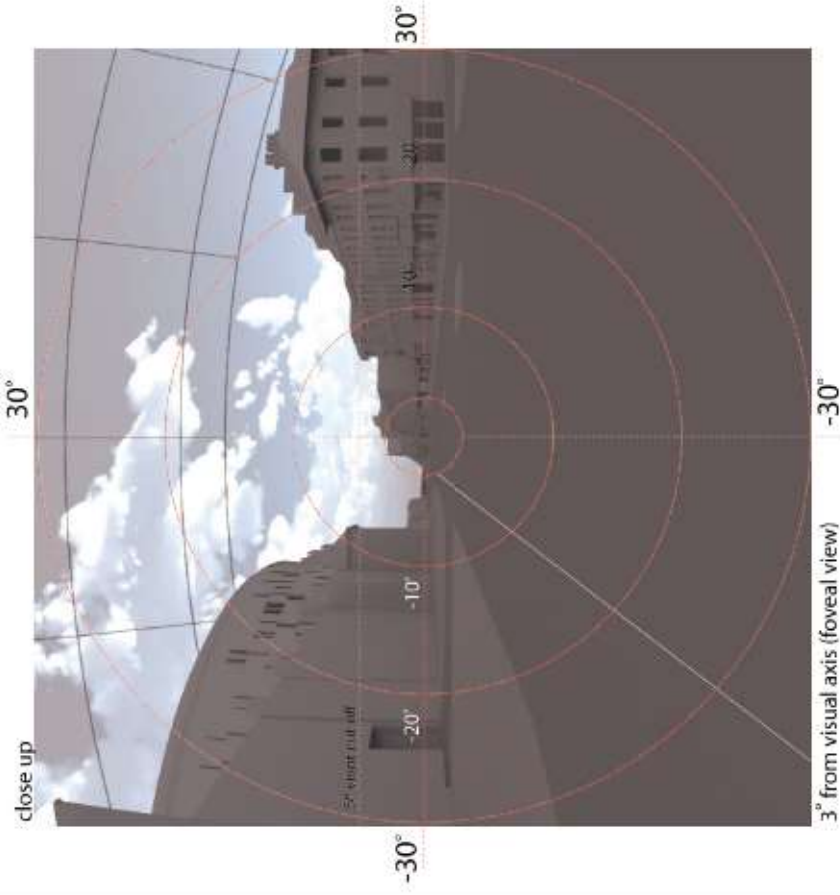


Figure 2b: Solar Glare - Months - 30 degrees close-up



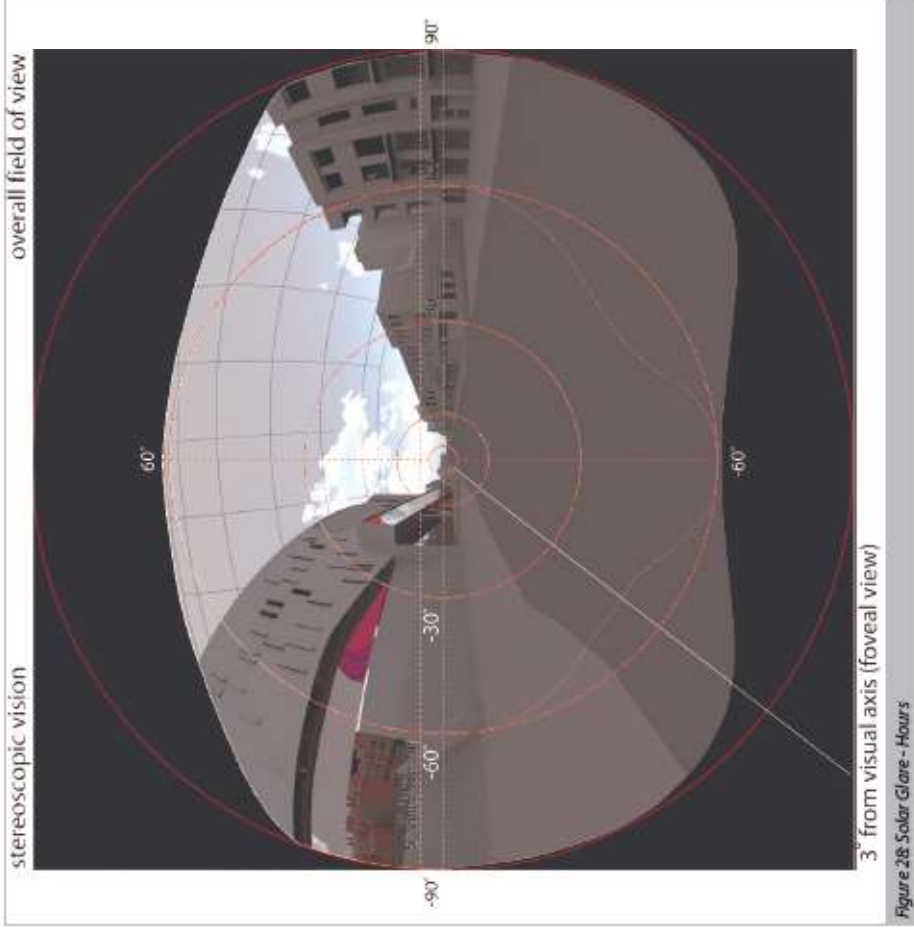


Figure 28: Solar Glare - Hours




Figure 29: Solar Glare - Months

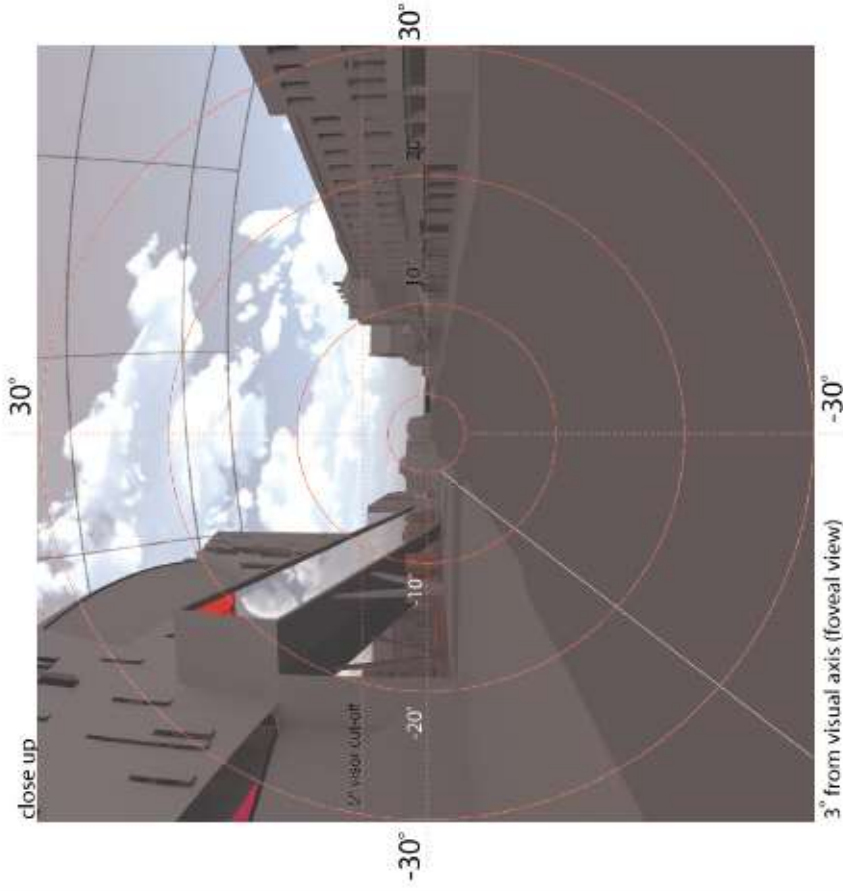


Figure 3a: Solar Glare - Hours - 30 degrees close-up

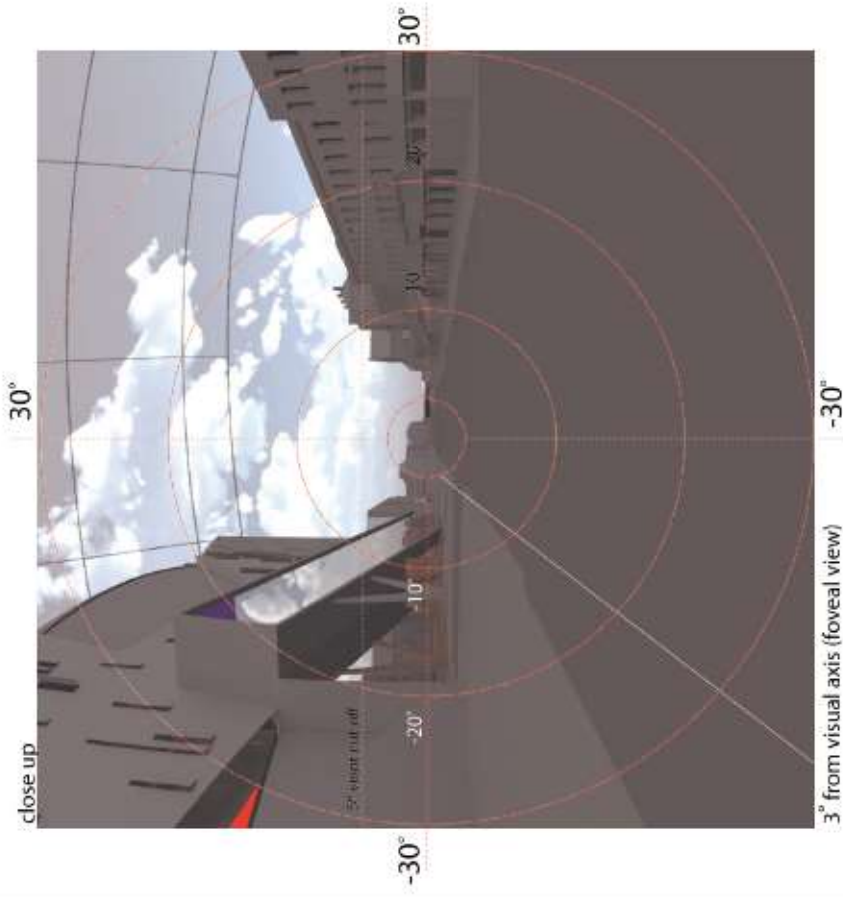




Figure 3b: Solar Glare - Months - 30 degrees close-up





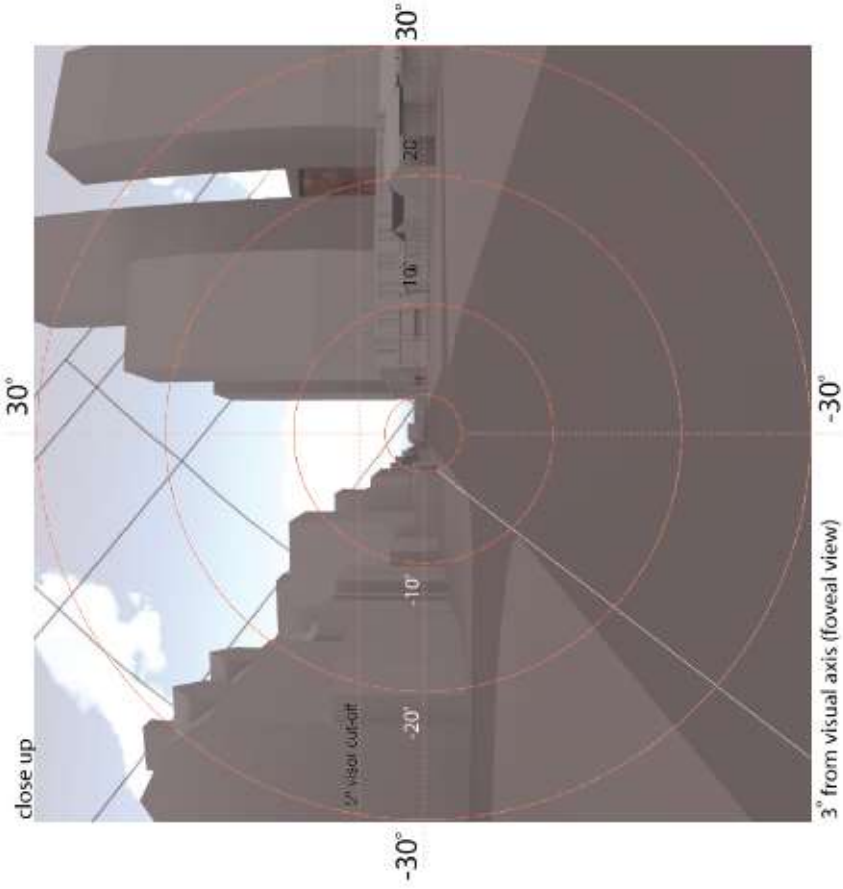


Figure 34: Solar Glare - Hours - 30 degrees close-up

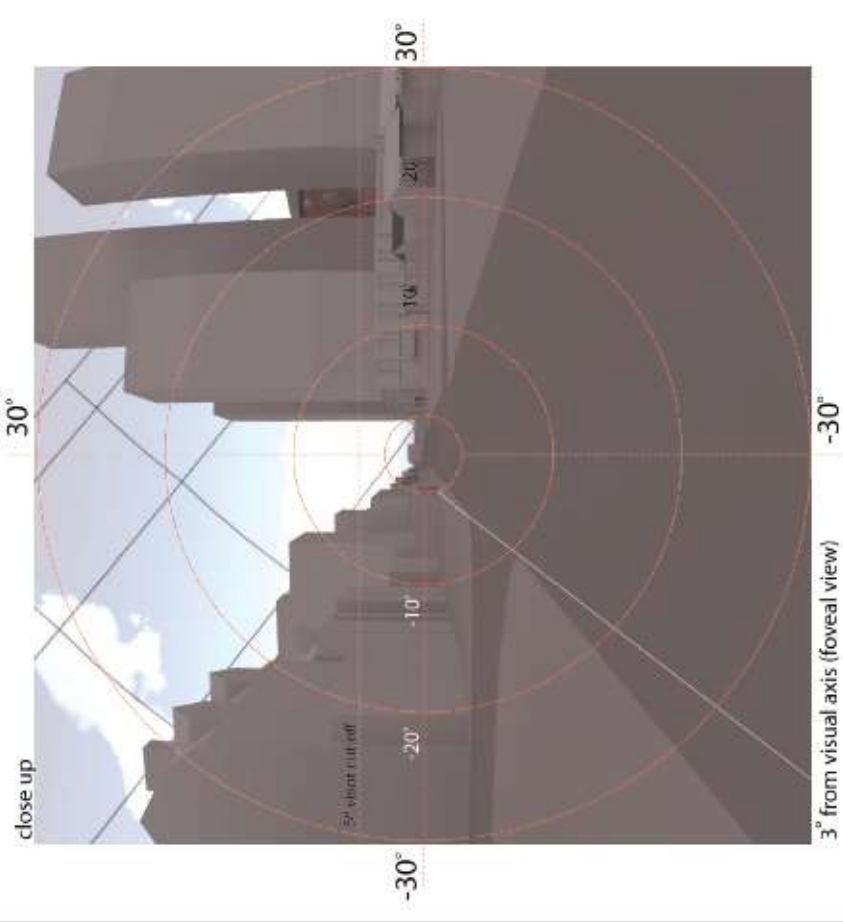




Figure 35: Solar Glare - Months - 30 degrees close-up





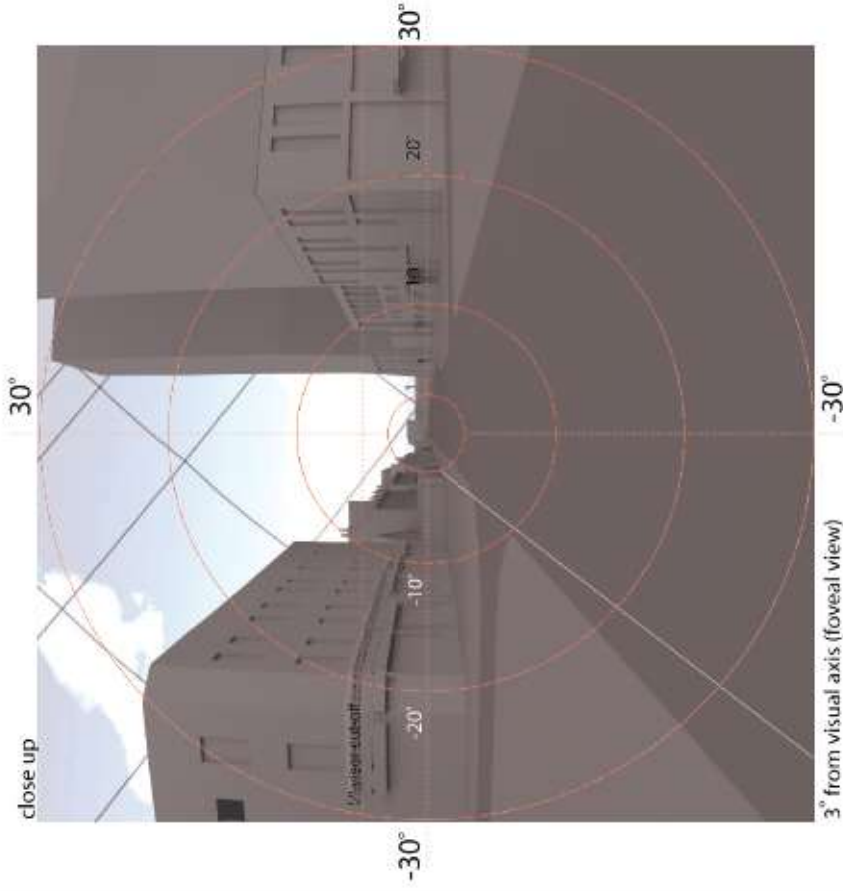


Figure 38. Solar Glare - Hours - 30 degrees close-up

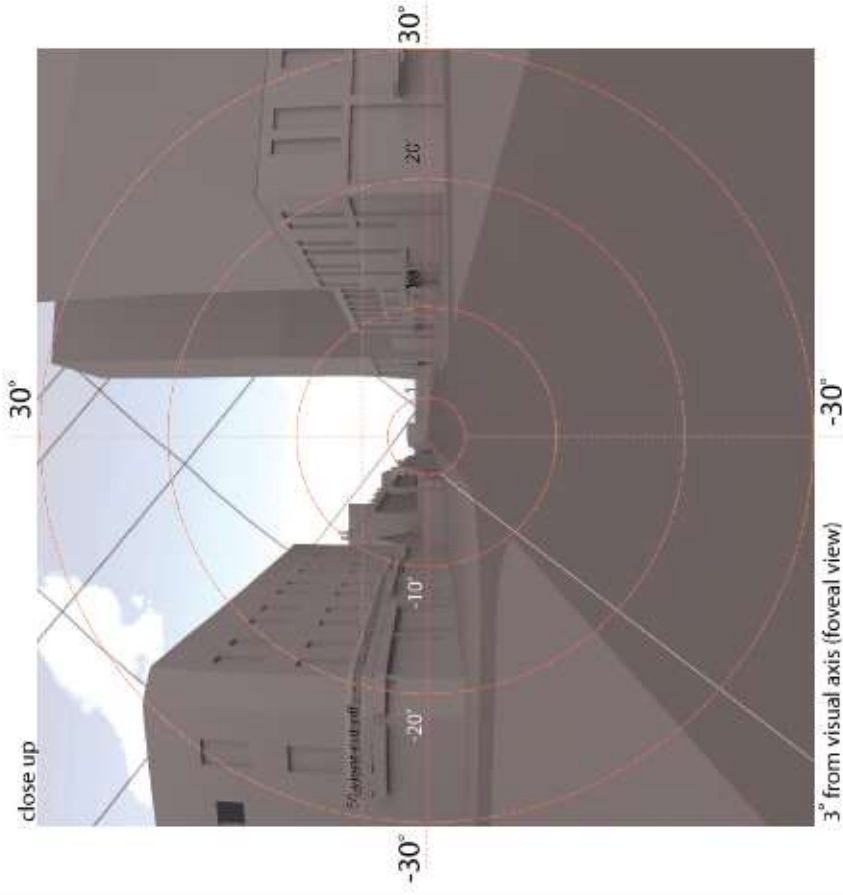


Figure 39. Solar Glare - Months - 30 degrees close-up



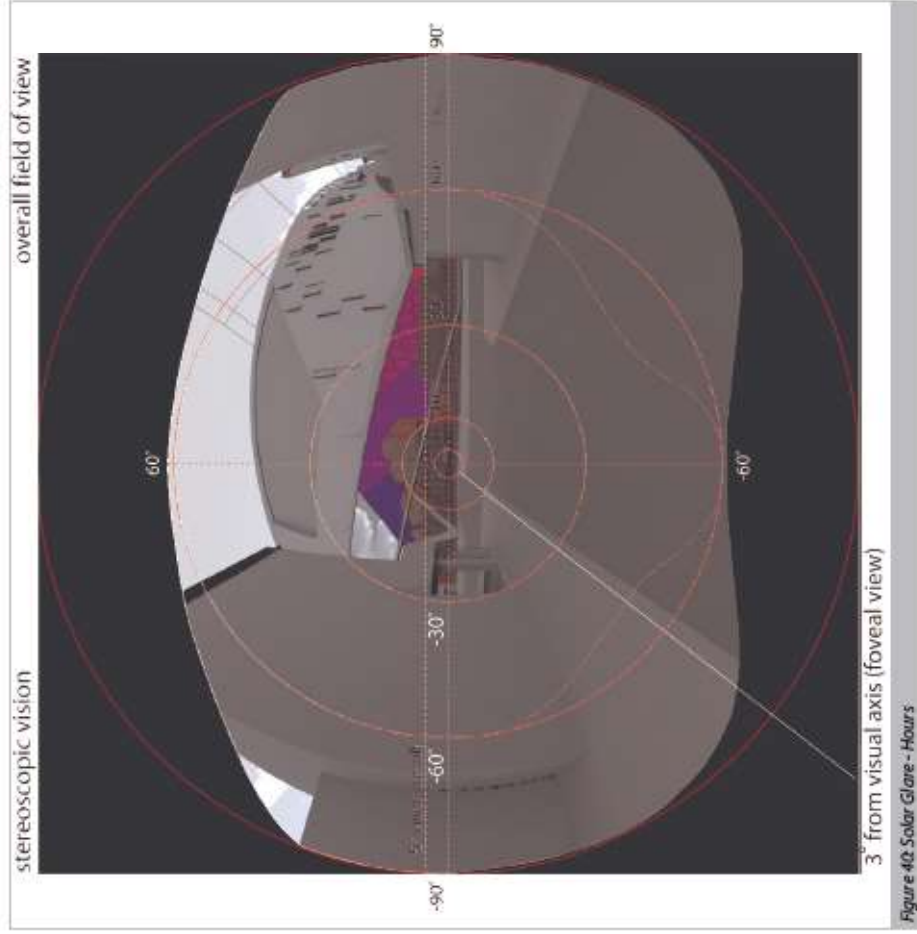


Figure 40: Solar Glare - Hours




Figure 41: Solar Glare - Months

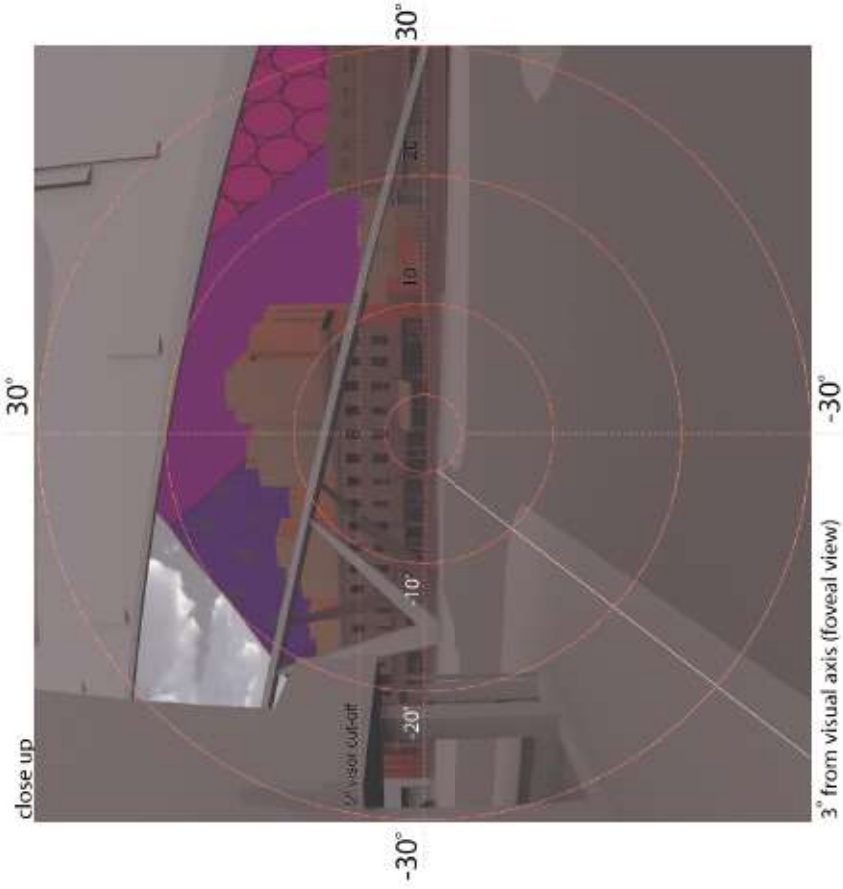


Figure 4.2: Solar Glare - Hours - 30 degrees close-up

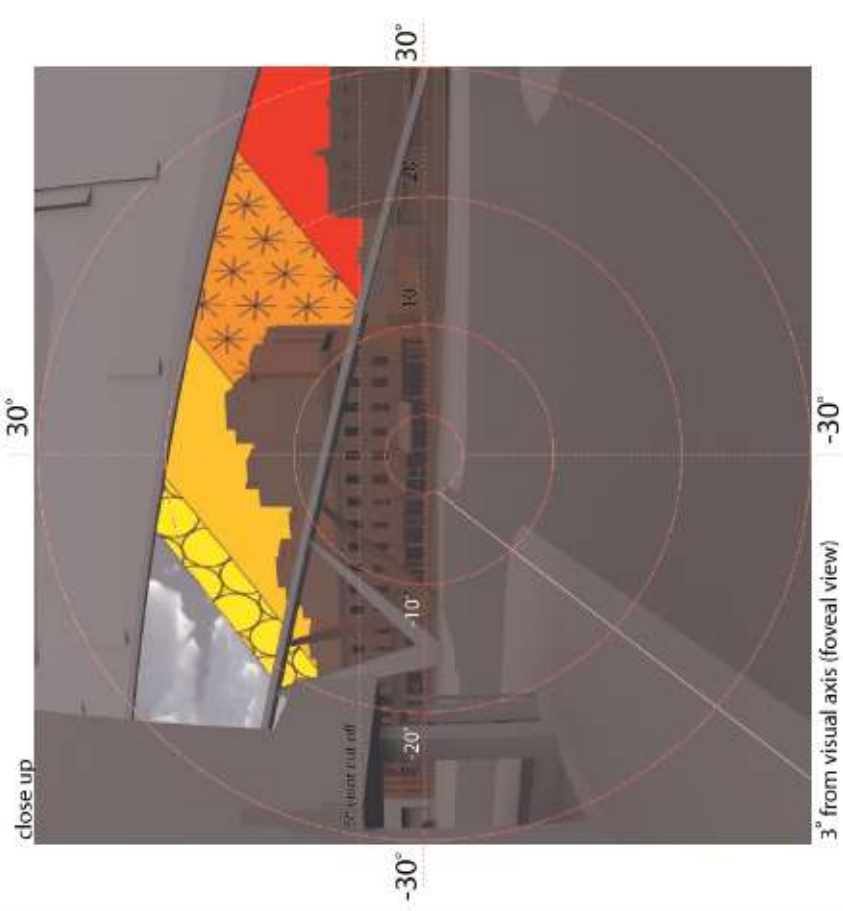



Figure 4.3: Solar Glare - Months - 30 degrees close-up



Daylight Potential Assessment

Tottenham Stadium
Project No: 9186

September 04, 2015



DAYLIGHT+SOLAR DESIGN





Client	Tottenham Hotspur
Architect	Allies and Morrison
Project Title	Tottenham Stadium
Project Number	9186
Report Title	Daylight Potential Assessment
Dated	September 04, 2015

Prepared by	MM
Checked by	SP
Type	Planning

Revisions	Date:	Notes:	Signed:
	-- / -- / --	--	--



1. Executive Summary

GIA was instructed to undertake the assessment of daylight potential on the proposed illustrative massing of Tottenham Towers.

The study of daylight potential is carried out with reference to BRE's Vertical Sky Component (VSC) assessment. This is the most appropriate test to be run at Outline Stage where details such as aperture sizes and interior layouts are not the subject of the planning submission.

The illustrations on page 7 show the proposed massing assessed and results for the VSC test can be found on pages 8-12 of this report.

It is clear from the images provided that the vast majority of the facades of the towers will achieve levels of VSC of 27% and above (depicted in yellow). BRE considers that this level of VSC will allow for interior levels of daylight which are in line with best practice.

A few portions of the facades, in particular the lower floors of the southern facade of Tower A, the eastern facade of Tower C, the northern facade of Towers B and C and the western facade of Tower A, will receive levels of VSC between 5 and 15%. This is typical of urban environments, however, a very good result considering the size and nature of this development.

According to BRE's guide, larger windows and careful interior layout design should be adopted in order to ensure adequate levels of interior daylight.

GIA has worked alongside Allies and Morrison architects on preliminary layouts and aperture sizes in order to ensure the highest interior daylight levels possible. These will be tested and submitted as part of a detailed or reserved matters application in due course.

We can conclude that the proposed illustrative massing will provide very good daylight potential overall which in turn has the potential to deliver accommodation which sees good levels of daylight indoors.

2. Introduction and Objective

GIA has been instructed to provide a report upon the potential availability of Daylight and Sunlight to the proposed accommodation within the residential scheme prepared by Allies and Morrison. GIA was specifically instructed to carry out the following:

- To create a 3D computer model of the proposal based upon drawings prepared by Allies and Morrison.
- Carry out a daylight assessment using the methodologies set out in the BRE guidelines for Vertical Sky Component.
- Prepare a report setting out the analysis and our findings.



3. BRE guidelines

The Building Research Establishment (BRE) have set out in their handbook *Site Layout Planning for Daylight and Sunlight a Guide to Good Practice* (2011), guidelines and methodology for the measurement and assessment of daylight and sunlight within proposed buildings. This document states that it is also intended to be used in conjunction with the interior daylight recommendations found within the *British Standard BS8206-2:2008* and *The Applications Manual on Window Design* of the Chartered Institution of Building Services Engineers (CIBSE).

The guide also provides advice on site layout planning to determine the quality of daylight and sunlight within open spaces between buildings.

It is important to note, however, that this document is a guide and states that its aim "is to help rather than constrain the designer".

The document provides advice, but also clearly states that it "is not mandatory and this document should not be seen as an instrument of planning policy". The report also acknowledges its introduction that "in special circumstances the developer or planning authority may wish to use different target values. For example, in a historic city centre a higher degree of obstruction may be unavoidable if new developments are to match the height and proportions of existing buildings."

It is an inevitable consequence of the built up urban environment that daylight and sunlight will be more limited in these areas. It is well acknowledged that in such situations there may be many other conflicting and potentially more important planning and urban design matters to consider other than just the provision of ideal levels of daylight and sunlight.

3.1. Daylight

The BRE set out various methods for assessing the daylight within a proposed building within section 2.1 and Appendix C of the handbook. The summary of this, given at the end of section 2.1 of the guide, states as follows:

"In general, a building will retain the potential for good interior diffused daylighting provided that on all its main faces:

A. No obstruction, measured in a vertical section perpendicular to the main face, from a point two metres above ground level, subtends an angle of more than 25 degrees to the horizontal;

Or

B. If (A) is not satisfied, then all points on the main face on a line two metres above ground level are within four metres (measured sideways) of a point which has a vertical sky line component of 27% or more."

3.1.1. Vertical Sky Component (VSC)

This method of assessment can be undertaken using a skylight indicator or a Waldram diagram. It measures from a single point, at the centre of the window (if known at the early design stage), the quantum of sky visible taking into account all external obstructions. Whilst these obstructions can be either other

buildings or the general landscape, trees are usually ignored unless they form a continuous or dense belt of obstruction.

The VSC method is a useful 'rule of thumb' but has some significant limitations. In determining the true quality of daylight within a proposed building, it does not take into account the size of the window, any reflected light off external obstructions, any reflected light within the room, or the use to which that room is put. Appendix C of the guide goes into more detail on these matters and sets forward alternative methods for assessment to overcome these limitations.

Appendix C of the BRE guide: Interior Daylighting Recommendations, states:

"The British Standard for daylighting, and the CIBSE Applications Manual: window design, contain advice and guidance on interior daylighting. This guide to good practice is intended to be used in conjunction with them, and its guidance is intended to fit in with their recommendations."

For skylight, the *British Standard* and the *CIBSE manual put forward three main criteria, based on the average daylight factor, room depth, and the position of the no skyline."*

These assessments are set out below.

3.1.2. Average Daylight Factor (ADF)

"If a predominantly daylight appearance is required, then ADF should be 5% or more if there is no supplementary electric lighting, or 2% or more if supplementary electric lighting is provided. There are additional recommendations for dwellings of 2% for kitchens, 1.5% for living rooms and 1% for bedrooms. These last are minimum values of Average Daylight Factor, and should be attained even if a predominantly daylight appearance is not required."

This method of assessment takes into account the total glazed area to the room, the transmittance quality of the glazing proposed, the total area of the room surfaces including ceilings and floors, and the internal average reflectance for the room being assessed. The method also takes into account the Vertical Sky Component and the quantum of reflected light off external surfaces.

This is, therefore, a significantly more detailed method of assessment than the Vertical Sky Component method set out above.

3.1.3. Room Depth Criterion (RDC)

Where it has access to daylight from windows in one wall only, the depth of a room can become a factor in determining the quantity of light within it. The BRE guidance provides a simple method for examining the ratio of room depth to window area. However, whilst it does take into account internal surface reflections, this method also has significant limitations in that it does not take into account any obstructions outside the window and therefore draws no input from the quantum of light entering the room.

3.1.4. No Sky Line (NSL)

This third method of assessment is a simple test to establish where within the proposed room the sky will be visible through the windows, taking into account external obstructions. The assessment is undertaken at working plane



height (850mm above floor level) and the method of calculation is set out in Appendix D of the BRE handbook.

Appendix C of the BRE handbook states "If a significant area of the working plane lies beyond the no skyline (i.e., it receives no direct skylight), then the distribution of daylight in the room will look poor and supplementary electric lighting will be required." To guarantee a satisfactory daylight uniformity, the area which does not receive direct skylight should not exceed 20% of the floor area, as quantified in the BS 8206 Part 2 2008.

3.1.5. Summary

The Average Daylight Factor gives a more detailed assessment of the daylight within a room and takes into account the highest number of factors in establishing a quantitative output.

However, the conclusion of Appendix C of the BRE guide states:

"All three of the criteria need to be satisfied if the whole of the room is to look adequately daylight. Even if the amount of daylight in a room (given by the Average Daylight Factor) is sufficient, the overall daylight appearance will be impaired if its distribution is poor."

In most urban areas it is important to recognise that the distribution of daylight within a room may be difficult to achieve, given the built up nature of the environment. Consequently, most local authorities seek to ensure that there is sufficient daylight within the room as determined by the Average Daylight Factor calculation. However, the additional recommendations of the BRE and British Standard for residential accommodation set out above, ought not to be overlooked.

3.2. Sunlight

The BRE provide guidance in respect of sunlight quality for new developments within section 3.1 of the handbook. It is generally acknowledged that the presence of sunlight is more significant in residential accommodation than it is in commercial properties, and this is reflected in the BRE document.

It states, "In housing, the main requirement for sunlight is in living rooms, where it is valued at any time of the day, but especially in the afternoon. Sunlight is also required in conservatories. It is viewed as less important in bedrooms and kitchens where people prefer it in the morning rather than the afternoon."

The BRE guide considers the critical aspects of orientation and overshadowing in determining the availability of sunlight at a proposed development site.

The guide proposes minimizing the number of dwellings whose living room face solely north unless there is some compensating factor such as an appealing view to the north, and it suggests a number of techniques to do so. Further more, it discusses massing solutions with a sensitive approach to overshadowing, so as to maximize access to sunlight.

At the same time it acknowledges that the site's existing urban environment may impose orientation or overshadowing constraints which may not be possible to overcome.

To quantify sunlight access for interiors where sunlight is expected, it refers to the BS 8206-2 criterion of Annual Probable Sunlight Hours (APSH) defined as "the total number of hours in the year that the sun is expected to shine on unobstructed ground, allowing for average levels of cloudiness at the location in question." In line with the recommendation, APSH is measured from a point on the inside face of the window, should the locations have been decided. If these are unknown, sunlight availability is checked at points 1.6m above the ground or the lowest storey level on each main window wall, and no more than 5m apart. If a room has multiple windows on the same wall or on adjacent walls, the highest value of APSH should be taken into account. If a room has two windows on opposite walls, the APSH for each can be added together.

The summary of section 3.1 of the guide states as follows:

"In general, a dwelling or non-domestic building which has a particular requirement for sunlight, will appear reasonably sunlit provided that:

At least one main window faces within 90 degrees of due south;

and

The centre of at least one window to a main living room can receive 25% of annual probable sunlight hours, including at least 5% of annual probable sunlight hours in the winter months between 21 September and 21 March."

In paragraph 3.1.11 the BRE guidance suggests that if a room faces significantly North of due East or West it is unlikely to meet the recommended levels proposed by the BS 8206-2. As such, it is clear that only windows facing within 90 degrees of due South can be assessed using this methodology.

It is also worth noting how paragraph 5.3 of the BS 8206-2 suggests that with regards to sunlight duration "The degree of satisfaction is related to the expectation of sunlight if a room is necessarily north facing or if the building is in a densely built urban area, the absence of sunlight is more acceptable than when its exclusion seems arbitrary".

3.3. Overshadowing

The BRE guidance in respect of overshadowing of amenity spaces is set out in section 3.3 of the handbook. Here it states as follows:

"Sunlight in the spaces between buildings has an important impact on the overall appearance and ambience of a development. It is valuable for a number of reasons:

- To provide attractive sunlit views (all year)*
- To make outdoor activities, like sitting out and children's play more pleasant (mainly during the warmer months)*
- To encourage plant growth (mainly in spring and summer)*
- To dry out the ground, reducing moss and slime (mainly during the colder months)*
- To melt frost, ice and snow (in winter)*



- To dry clothes (all year)*

Again, it must be acknowledged that in urban areas the availability of sunlight on the ground is a factor which is significantly controlled by the existing urban fabric around the site in question and so may have very little to do with the form of the development itself. Likewise there may be many other urban design, planning and site constraints which determine and run contrary to the best form, siting and location of a proposed development in terms of availability of sun on the ground.

The summary of section 3.3 of the guide states as follows:

"3.3.17 It is recommended that for it to appear adequately sunlit throughout the year, at least half of a garden or amenity area should receive at least two hours of sunlight on 21 March. If as a result of new development an existing garden or amenity area does not meet the above, and the area which can receive two hours of sun on 21 March is less than 0.8 times its former value, then the loss of sunlight is likely to be noticeable. If a detailed calculation cannot be carried out, it is recommended that the centre of the area should receive at least two hours of sunlight on 21 March."

3.4. Further relevant information

Further information can be found in *The Daylight in Urban Areas Design Guide* (Energy Saving Trust CE257, 2007) which provides the following recommendation with regards to VSC levels in urban areas:

"If 'theta' (visible sky angle) is greater than 65° (obstruction angle less than 25° or VSC at least 27 percent) conventional window design will usually give reasonable results.

If 'theta' is between 45° and 65° (obstruction angle between 25° and 45° VSC between 15 and 27 percent), special measures such as larger windows and

changes to room layout are usually needed to provide adequate daylight.

If 'theta' is between 25° and 45° (obstruction angle between 45° and 65° VSC from 5 to 15 percent), it is very difficult to provide adequate daylight unless very large windows are used.

If 'theta' is less than 25° (obstruction angle more than 65° VSC less than 5 percent) it is often impossible to achieve reasonable daylight, even if the whole window wall is glazed."

4. Methodology

In order to undertake the daylight and sunlight assessments set out above, we have prepared a three dimensional computer model and used specialist lighting simulation software.

The three dimensional representation of the proposed development has been modelled using the scheme drawings provided to us by Allies and Morrison. This has been placed in the context of its surrounding buildings which have been modelled from survey information, photogrammetry, OS and site photographs. This allows for a precise model, which in turn ensures that analysis accurately represents the amount of daylight and sunlight available to the building facades, internal and external spaces, considering all of the surrounding obstructions and orientation.

4.1. Simulation assumptions

Where no values for reflectance, transmittance and maintenance factor were specified by the designer the following values from BS 8206-2:2008, Annex A, tables A1-A6 were used for the calculation of Average Daylight Factor values. These values are shown in Table 1.

Reflectance values:	Typical values					
	A.3	A.4	A.5	A.6	A.7	TOTAL
Surrounding	0.75	8	1	1	1	0.69
Pavement	0.75	8	1	1	0.8	0.55
Grass	0.75	8	2	1	1	0.63
Yellow brick	0.75	8	2	1	0.8	0.50
Red brick	0.75	8	3	1	1	0.57
Concrete	0.75	8	3	1	0.8	0.46
Internal walls (light grey)	0.9	8	1	1	1	0.83
Internal ceiling (white paint)	0.9	8	1	1	0.8	0.66
Internal floor (medium to light veneer)	0.9	8	2	1	1	0.76
Transmittance values:	0.9	8	2	1	0.8	0.60
Double glazing:	0.9	8	3	1	1	0.68
Pillington K Glass 4/24/4 Argon filled 50%	0.9	8	3	1	0.8	0.55
Single glazing:	0.74	8	1	1	1	0.68
Pillington Optifloat Clear, Annealed, 4mm	0.74	8	1	1	0.8	0.54
Translucent glass ing:	0.74	8	2	1	1	0.62
Pillington Optifloat Opal - 4mm K 2/6/4mm Opal	0.74	8	2	1	0.8	0.50
Double translucent Low-E (frames modelled)	0.74	8	3	1	1	0.56
Double translucent Low-E (frames not modelled)	0.74	8	3	1	0.8	0.45

Table 1: Typical reflectance, transmittance and maintenance factors




Figure 1: Top View




Figure 2: Perspective View



Daylight Potential Assessment




Figure 3: View 1






Figure 4: View 1



N.B. Some buildings may be not visualised to increase the readability of the diagrams



Daylight Potential Assessment




Figure 5 View 2






Figure 6 View 2



N.B. Some buildings may be not visualised to increase the readability of the diagrams



Daylight Potential Assessment




Figure 2: View 3






Figure 3: View 3



N.B. Some buildings may be not visualised to increase the readability of the diagrams




Figure 9 View 4






Figure 10 View 4



N.B. Some buildings may be not visualised to increase the readability of the diagrams

Daylight Potential Assessment






Figure 11: View 4



N.B. Some buildings may be not visualised to increase the readability of the diagrams