


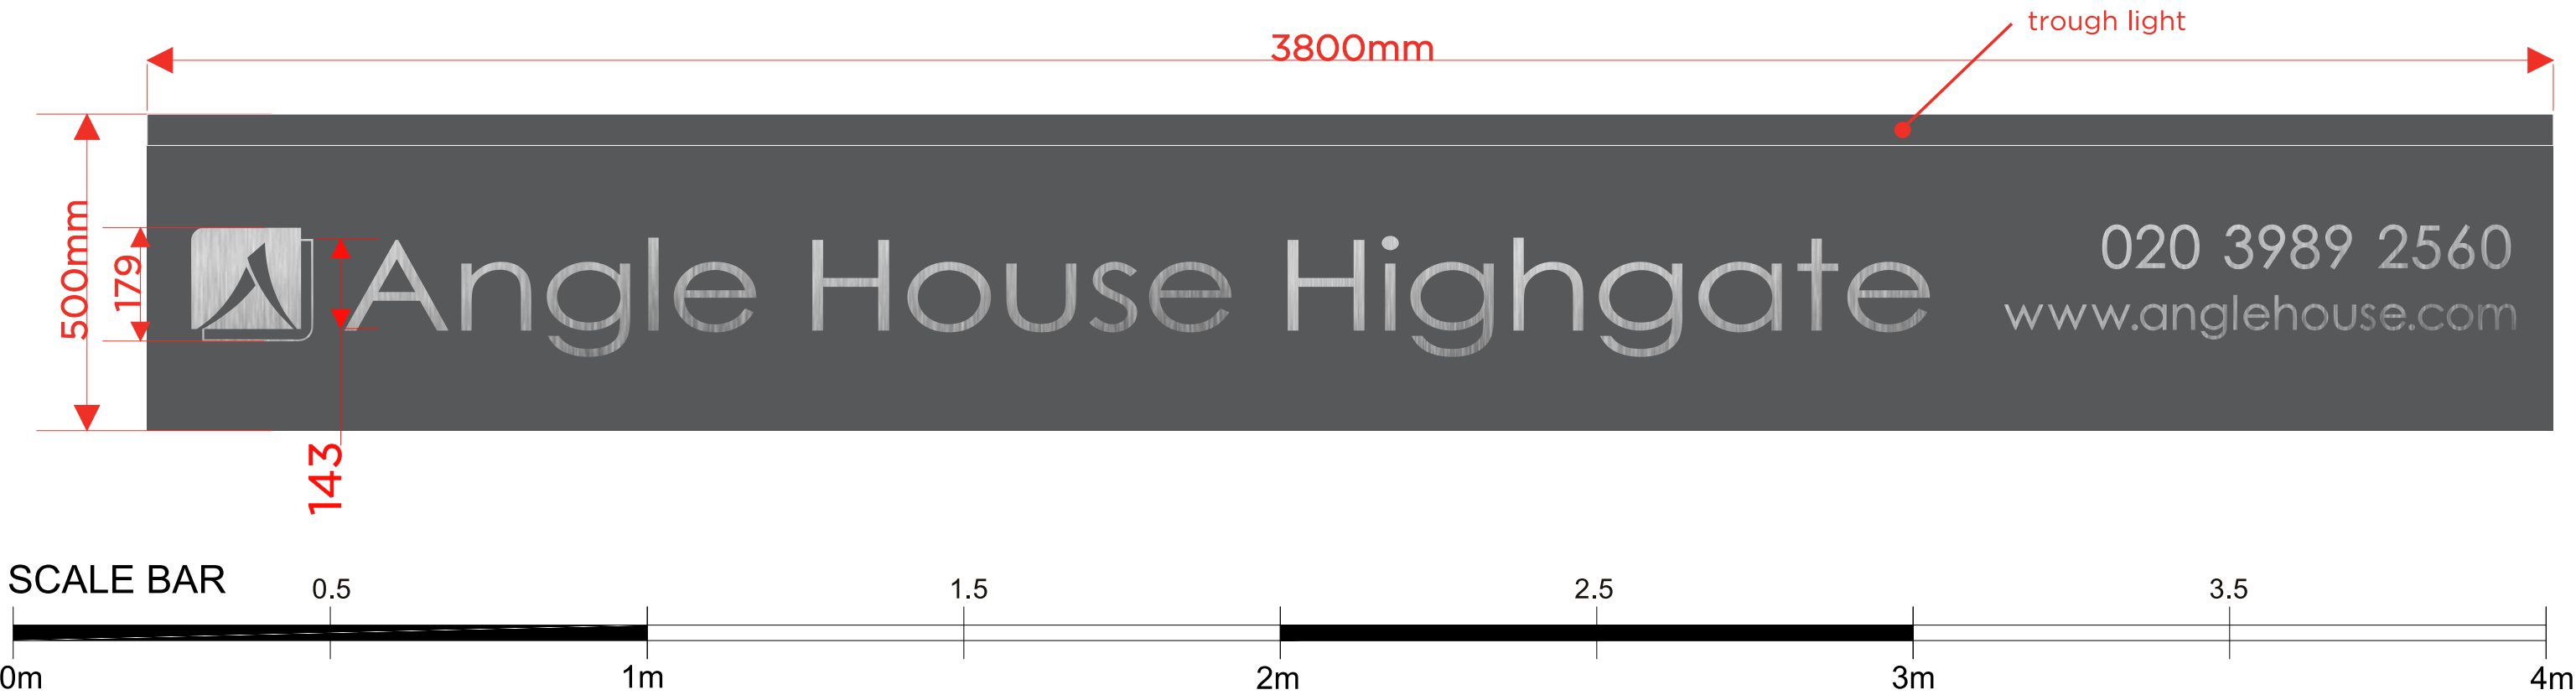

Folded 2mm aluminium panel powder coated RAL 7043 grey satin.


Logo and 'Angle House' to be applied in flat cut 2mm brushed stainless steel (316 grade) 'vertical grain' on nickel plated locator fixings.

Telephone number and web address to be applied in flat cut 2mm brushed stainless steel (316) 'vertical grain' flush mounted back to aluminium panel with VHB tape.

Fascia to be illuminated by full length trough light downlighter with cool white illumination, powder coated RAL 7043 to match fascia. Light levels not exceeding 300cd/m2.

Trough light to be mounted on 200mm quick fix brackets on top of aluminium panel.

Side through section (NTS)

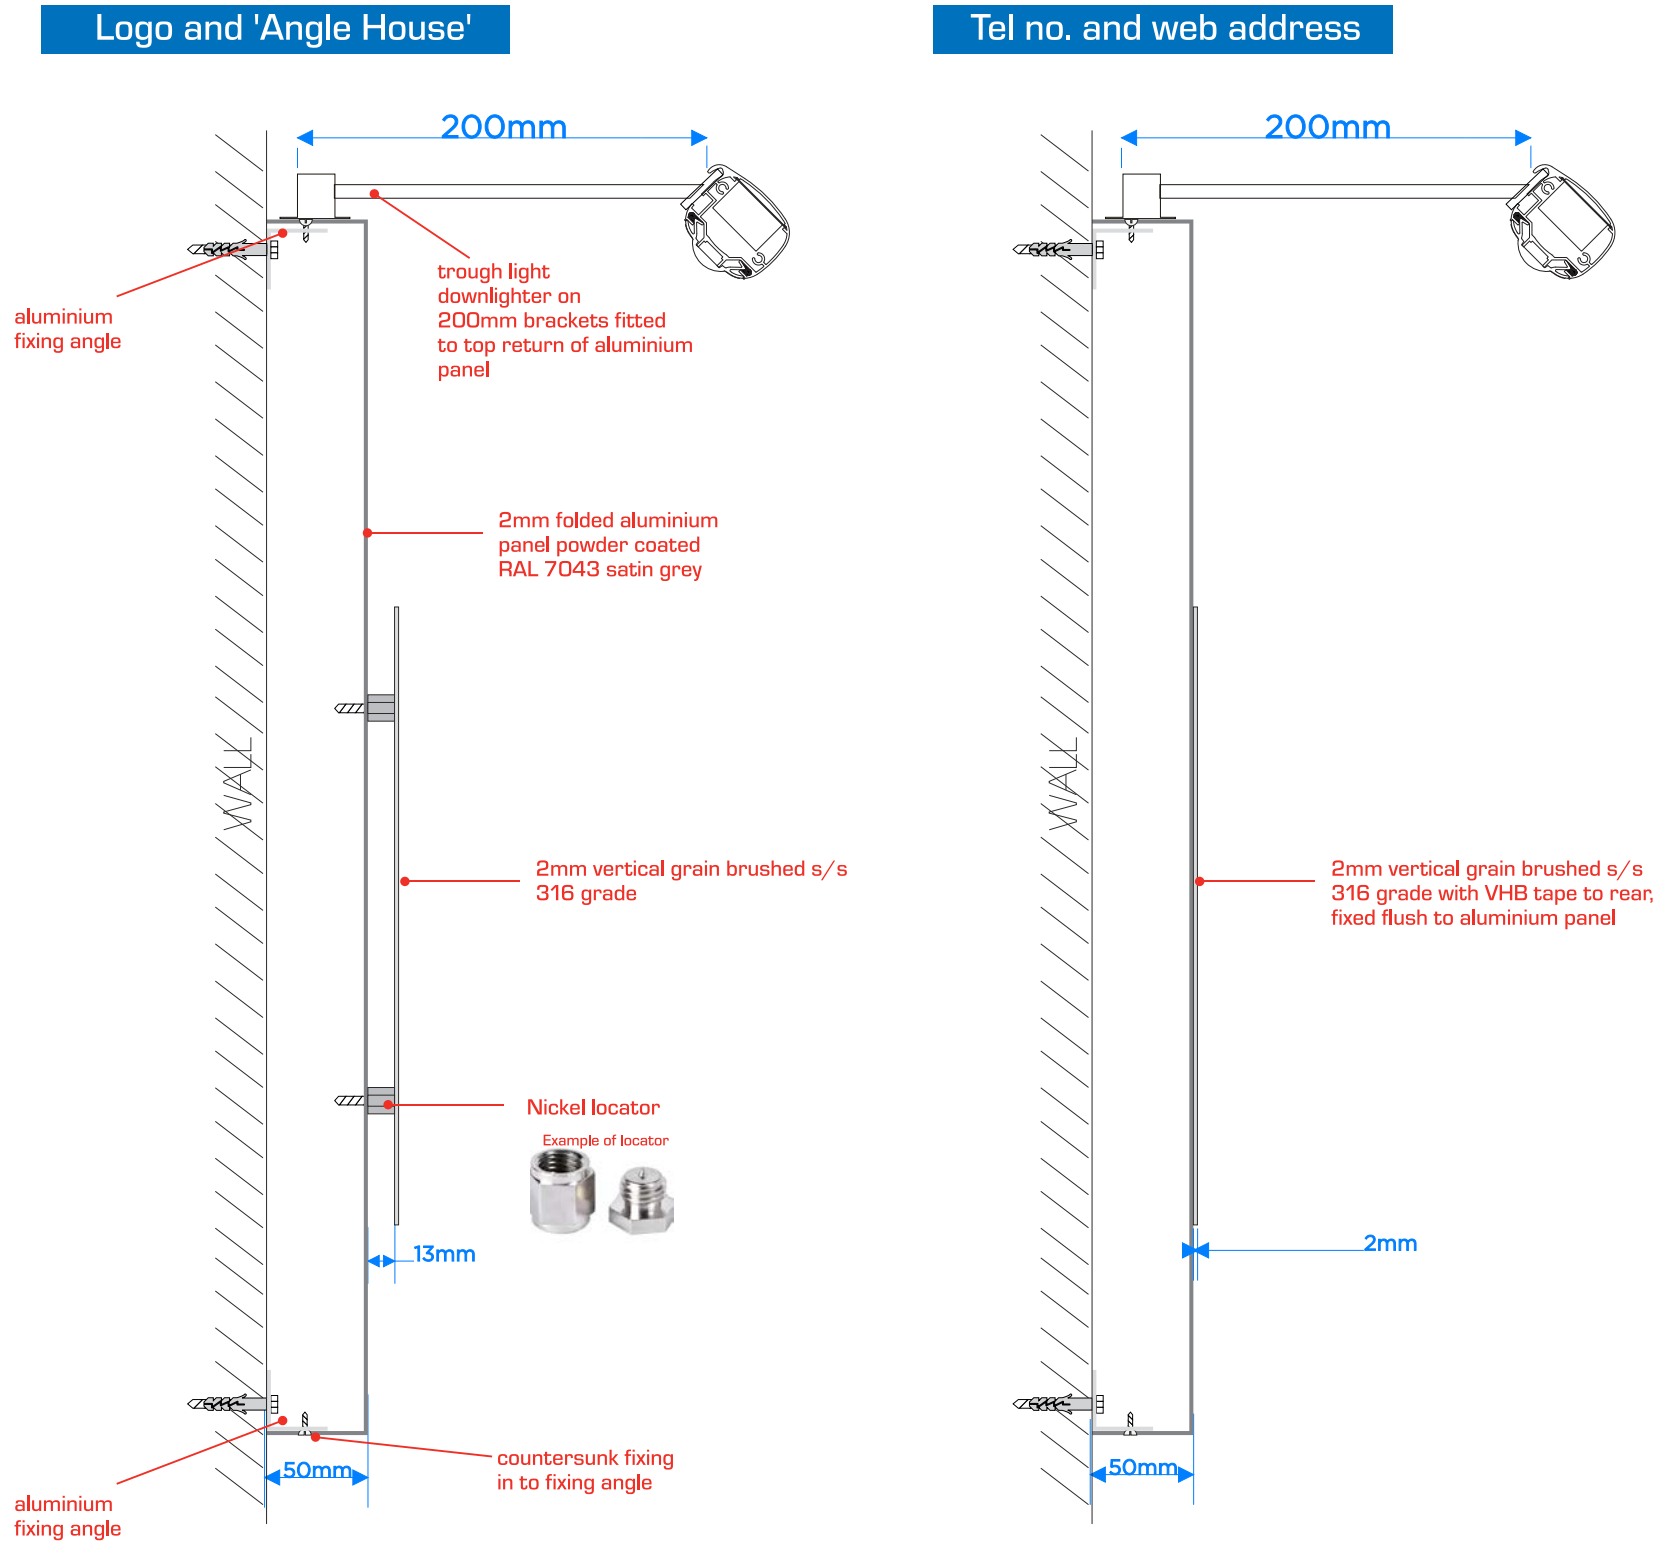

Indicative view

