



PRECEDENT IMAGES - SHOP FRONT DEVELOPMENT




Historic image C1893



Historic image C1980

MATERIAL PALETTE

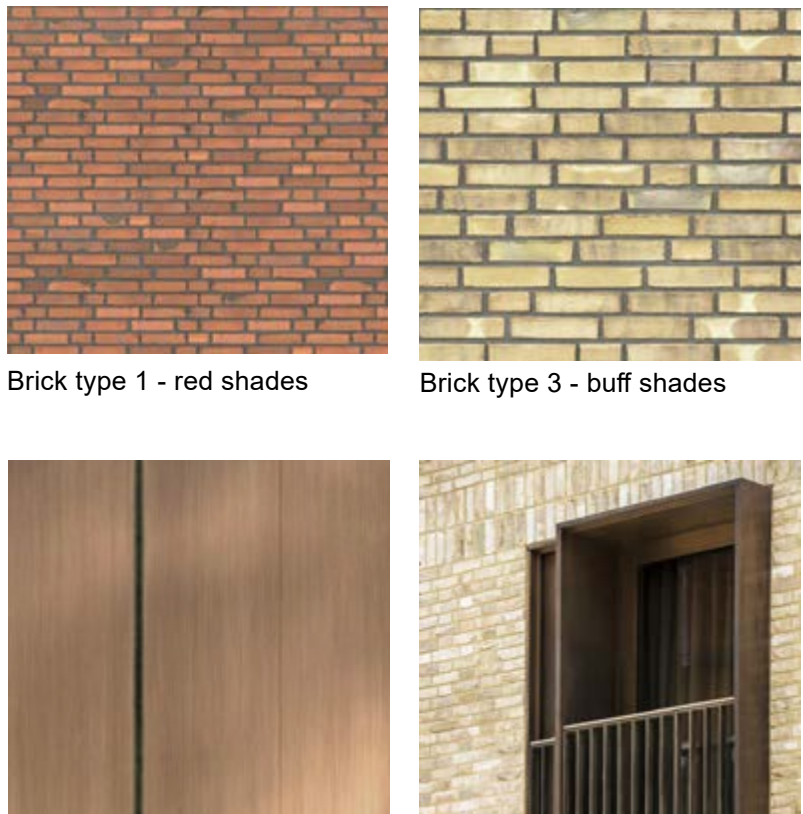

MATERIAL DESCRIPTION:

- | | | | |
|--|--|---|---|
| 1. FACADE FINISH - BRICK WORK
Brick type 1: red shades | 8. FACADE FINISH - BRICK WORK (HEADER COURSE)
Brick type 4: white shades | 14. DOOR FINISH
Proprietary bronze PPC aluminium glazing system | 20. GATEWAY ARCH
Bronze coloured entrance metal gateway with lettering |
| 2. FACADE FINISH - BRICK WORK
Brick type 2 - grey shades | 9. FACADE FINISH - BRICK WORK
Glazed bricks (as shown) | 15. DOOR FINISH - SHOP FRONT
Timber framed glazing system (profile to match historic detail) | 21. WINDOWHEAD TREATMENT
Painted Concrete : red shades |
| 3. FACADE FINISH - BRICK WORK
Brick type 3 - buff shades | 10. FACADE FINISH - STANDING SEAM CLADDING
Bronze coloured metal panel | 16. DOOR FINISH
Proprietary bronze PPC aluminium system, glazed door | 22. WINDOWHEAD TREATMENT
Painted Concrete : white shades |
| 4. FACADE FINISH - BRICK WORK
Brick type 4 - white shades | 11. DOOR FINISH
Proprietary grey louvred double door with solid top panel | 17. DOOR FINISH
Perforated bronze PPC aluminium system | 23. WINDOWHEAD TREATMENT
Painted Concrete : grey shades |
| 5. FACADE FINISH - BRICK WORK
To match existing | 12. BALUSTRADES
Painted metal | 18. PARAPET - COPING
Portland stone coping with weathering | 24. SLAB EDGE TREATMENT
Precast ribbed band : red shades |
| 6. FACADE FINISH - BRICK WORK (HEADER COURSE)
Brick type 1: red shades | 13. WINDOW FINISH
Proprietary PPC aluminium glazing system (bronze, white or grey as shown) | 19. TOTEM
Bronze coloured screen with singage | |
| 7. FACADE FINISH - BRICK WORK (HEADER COURSE)
Brick type 3: buff shades | | | |



A: 5 Rochester Mews - London - NW1 9JB
T: 020 7267 8332
W: f3architects.com
E: info@f3architects.com

Except for Planning purposes, figured dimensions only are to be taken from this drawing.
All dimensions are in millimetres unless otherwise stated.
All dimensions shall be checked on site prior to works commencing.
Any discrepancies shall be reported to the Architect.
© Copyright F3 Architecture + Design. All rights reserved.

Health and Safety

Refer to relevant Construction (Design and Management) documentation where applicable. The Contractor shall plan, manage and monitor the works inclusive of temporary erection stability. Any works that are found to be unstable in the temporary state are to be reported directly to the structural engineer and Main Contractor/ Package Manager in order to provide safe temporary support. Check on site prior to commencement of work/fabrication etc.

project
THE PRINTWORKS
819-829, HIGH ROAD, TOTTENHAM,
LONDON, N17 8ER

title
PROPOSED GA ILLUSTRATIVE
MATERIALS ELEVATION STUDY

drawn by	scale	paper	project no
GB	1 : 100	A1	220428

status	revision
A2 - ISSUED FOR PLANNING	A2.P1

drawing no
PRINT-F3A-ZZ-ZZ-EL-A-82539


DATE	CHK	DESCRIPTION	A2	P1	STA	NO.
26.07.2023	AC	ISSUED FOR PLANNING				
REVISION HISTORY						

NOTES:

THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL RELEVANT F3 ARCHITECTS & INTERIORS DRAWINGS AND SPECIFICATIONS, M&E, FIRE COMPARTMENT STRATEGY, ACOUSTIC, AV, STRUCTURAL ENGINEERS DRAWINGS AND SPECIFICATIONS.



KEY PLAN

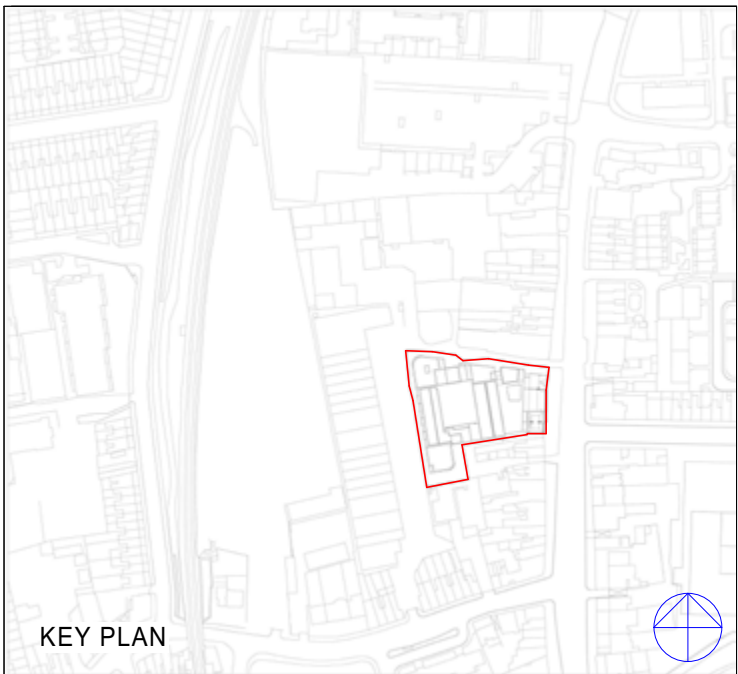

KEY PLAN