



PRECEDENT IMAGES




Jane Street Apartments, David Chipperfield, New York



Arcadia, DKO Architecture, Australia

MATERIAL PALETTE

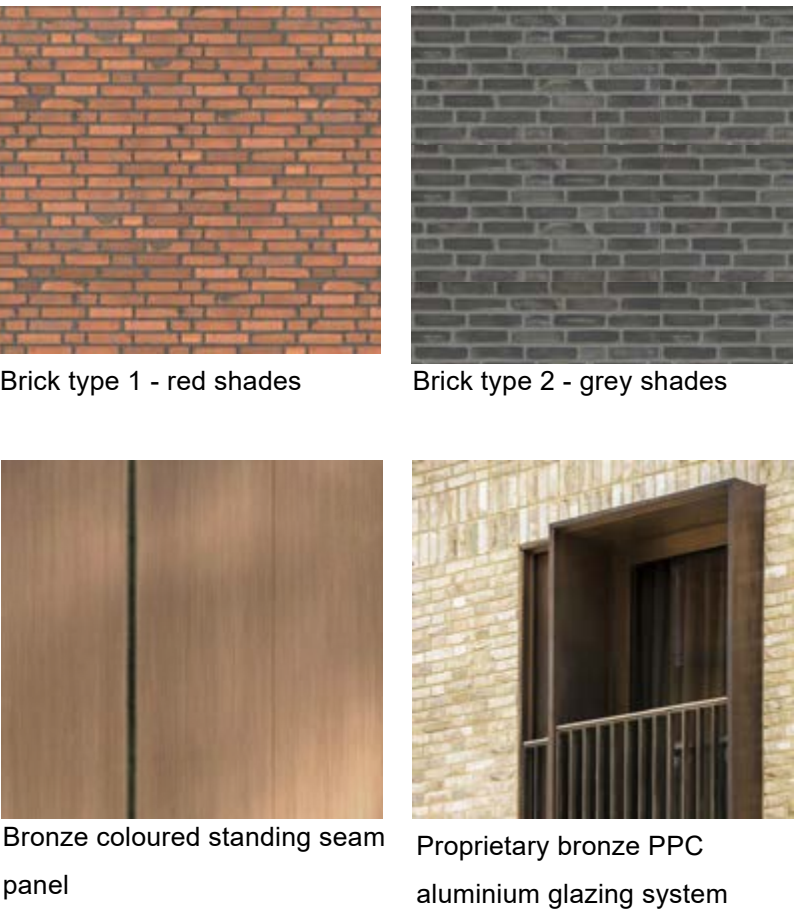

MATERIAL DESCRIPTION:

- FACADE FINISH - BRICK WORK
Brick type 1: red shades
- FACADE FINISH - BRICK WORK
Brick type 2 - grey shades
- FACADE FINISH - BRICK WORK
Brick type 3 - buff shades
- FACADE FINISH - BRICK WORK
Brick type 4 - white shades
- FACADE FINISH - BRICK WORK
To match existing
- FACADE FINISH - BRICK WORK (HEADER COURSE)
Brick type 1: red shades
- FACADE FINISH - BRICK WORK (HEADER COURSE)
Brick type 3: buff shades
- FACADE FINISH - BRICK WORK (HEADER COURSE)
Brick type 4: white shades
- FACADE FINISH - BRICK WORK
Glazed bricks (as shown)
- FACADE FINISH - STANDING SEAM CLADDING
Bronze coloured metal panel
- DOOR FINISH
Proprietary grey louvred double door with solid top panel
- BALUSTRADES
Painted metal
- WINDOW FINISH
Proprietary PPC aluminium glazing system (bronze, white or grey as shown)
- DOOR FINISH
Proprietary bronze PPC aluminium glazing system
- DOOR FINISH - SHOP FRONT
Timber framed glazing system (profile to match historic detail)
- DOOR FINISH
Proprietary bronze PPC aluminium system, glazed door
- DOOR FINISH
Perforated bronze PPC aluminium system
- PARAPET - COPING
Portland stone coping with weathering
- TOTEM
Bronze coloured screen with singage
- GATEWAY ARCH
Bronze coloured entrance metal gateway with lettering
- WINDOWHEAD TREATMENT
Painted Concrete : red shades
- WINDOWHEAD TREATMENT
Painted Concrete : white shades
- WINDOWHEAD TREATMENT
Painted Concrete : grey shades
- SLAB EDGE TREATMENT
Precast ribbed band : red shades



A: 5 Rochester Mews - London - NW1 9JB
T: 020 7267 8332
W: f3architects.com
E: info@f3architects.com

Except for Planning purposes, figured dimensions only are to be taken from this drawing.
All dimensions are in millimetres unless otherwise stated.
All dimensions shall be checked on site prior to works commencing.
Any discrepancies shall be reported to the Architect.
© Copyright F3 Architecture + Design. All rights reserved.

Health and Safety

Refer to relevant Construction (Design and Management) documentation where applicable. The Contractor shall plan, manage and monitor the works inclusive of temporary erection stability. Any works that are found to be unstable in the temporary state are to be reported directly to the structural engineer and Main Contractor/ Package Manager in order to provide safe temporary support. Check on site prior to commencement of works/fabrication etc.

project

THE PRINTWORKS
819-829, HIGH ROAD, TOTTENHAM,
LONDON, N17 8ER

title

PROPOSED GA ILLUSTRATIVE
MATERIALS ELEVATION STUDY

drawn by scale paper project no
GB 1 : 100 A1 220428

status revision
A2 - ISSUED FOR PLANNING A2.P1


drawing no

PRINT-F3A-ZZ-ZZ-EL-A-82538


DATE	CHK	DESCRIPTION	A2	P1	STA	NO.
26.07.2023	AC	ISSUED FOR PLANNING				
REVISION HISTORY						

NOTES:

THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL RELEVANT F3 ARCHITECTS & INTERIORS DRAWINGS AND SPECIFICATIONS, M&E, FIRE COMPARTMENT STRATEGY, ACOUSTIC, AV, STRUCTURAL ENGINEERS DRAWINGS AND SPECIFICATIONS.

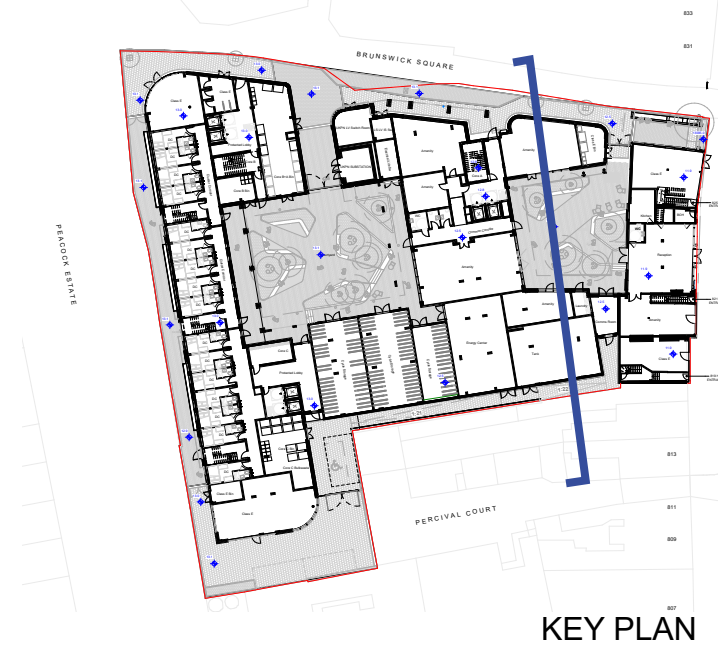

KEY PLAN

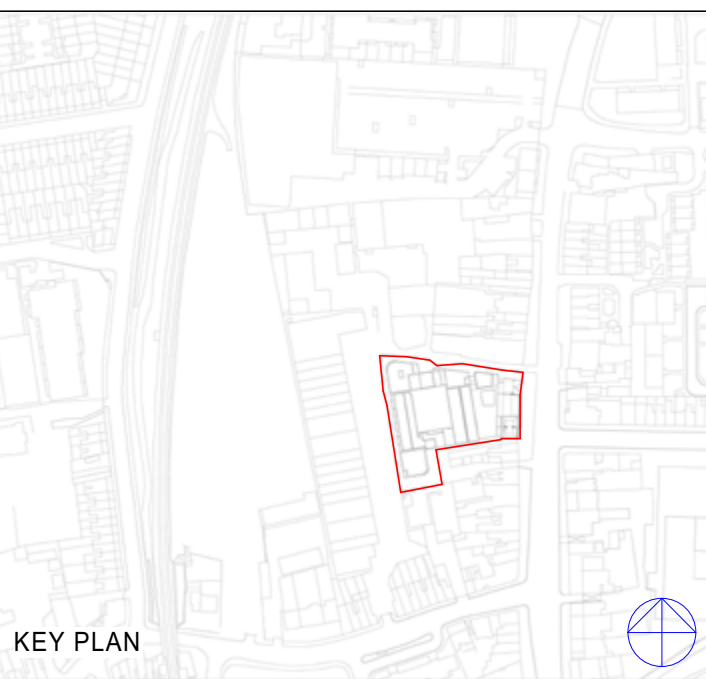

KEY PLAN