

Project
Hornsey Town Hall
Document Title
Town Hall Floor Schedule


Issue Reason
Planning

Revision
Rev - 01

Issue Date
01/10/23

Item description	Original Condition Photo (If applicable)	Refurbished/New Sample Photo	Location	Refurbished/Replica/New	Method Statement or Spec Reference	On site sample reviewed and agreed
Mirrored Wall Linings			Town Hall - Various	Refurb	ALT-785	
Refurbishment of existing acoustic plastered walls		 	Assembly Hall	Refurb	ALT-751	
Refurbishment of existing Platser Walls			Town Hall - multiple locations	Refurb	ALT-755	
Fabric wall lining Replacement of replica tapestries with acoustic absorption)			Council Chamber	Replica	Hines of Oxford - Custom Tapestry	Yes
Terrazo Wall Tiles			Toilets	Refurb	ALT-408	
Supper Room Acoustic Panels			Supper Room	Replacement	ALT-100	
Perrycot Limestone Wall Tiles					ALT-418	
Gold Mossaic					ALT-421	
Column Cladding	 		Rates Office G.27/G.29	DA	ALT-101	
Porcelain Terrazo Wall Tile and Skirting			Town Hall - new public lavatories	New (to mirror existing bathrooms)	Pinch DMPN 01 Natural finish 595x595x10.5mm	
Timber Skirting <i>To match existing where new skirting is required to extend the existing, and where the skirting interfaces with LIN-109</i>			Town Hall - Hotel Corridors and Hotel Rooms	Replica	Warm tone linear timber floor 190mm wide board that matches the 954 in 15/4 x 1990 x 1900.	

Metal Mesh

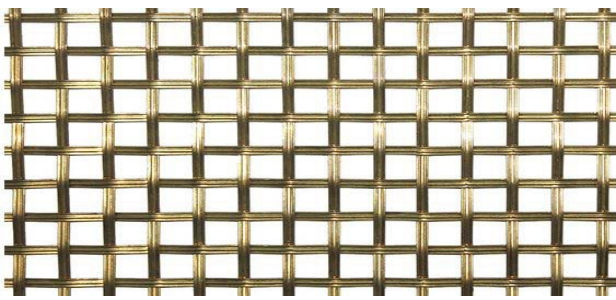


Mayours Parlour, Members Room and Hotel Kitchen Cupboards Grilles,

Replica

Portland 8/8
Traditional Pre-crimped
Wire Mesh
Material: Brass
opening: 8x8mm
Strand:3x1.2mm

Refurbishment of existing bronze balustrade

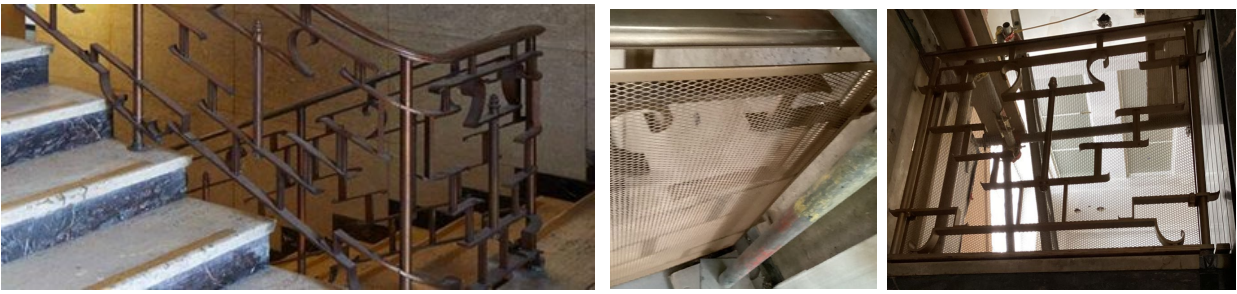

Refurb

ALT-829/ALT-851/ALT-855

Refurbishment of existing steel balustrade



Town Hall - Committee Rooms and Lady/Gentlemen's Cloakroom

ALT-828