
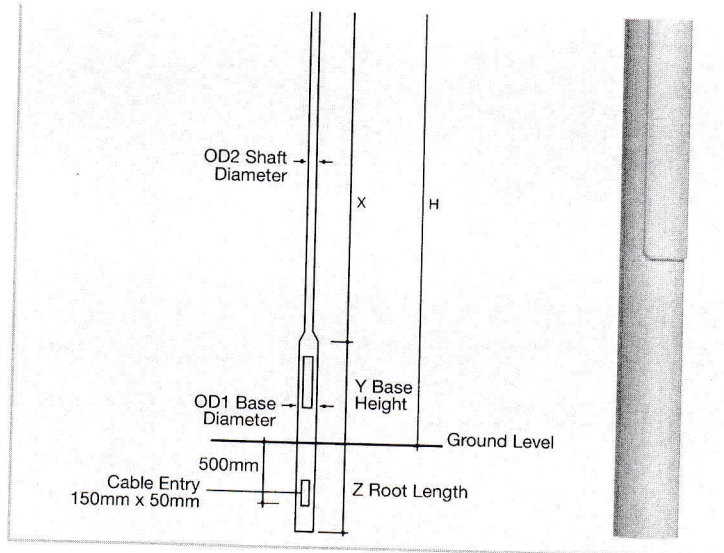


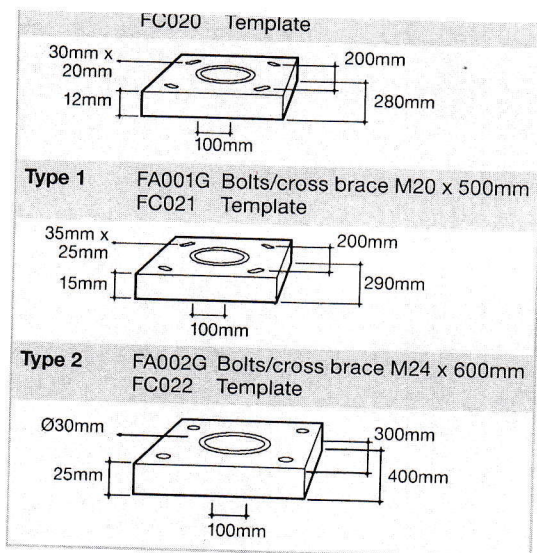

Accessories ELSAB1/6A Single fuse cut-out, 6A, loop in/out (not fitted) ELSAB12/6A Twin fuse cut-out, 6A, loop in/out (not fitted)

Root Mounted

Product Code	Height	OD1	OD2	x	y	z	Door Opening	Weight (kg)	OTM (kNm)	Shear (kN)	Min. Concrete Diameter*
TB040	4m	140	60	2690	1250	800	500x100	31	3.3	1.0	950
TB050	5m	140	76	3675	1250	800	500x100	41	4.3	1.1	525
TB060	6m	140	76	4660	1250	1000	500x100	49	4.2	1.0	269
TB081	8m	168	89	6630	1250	1200	600x115	67	7.1	1.4	262
TB108	10m	168	114	8600	1250	1500	600x115	116	12.8	1.9	239
TB128/SP	12m	194	140/127	9840	1750	1700	600x115	188	20.7	2.5	262

*Root concrete diameter based on poor soil or better, min. 230kN/m² per m

Flange Plate Mounted

Product Code	Height	OD1	OD2	x	y	Door Opening	Flange Plate	Weight (kg)	OTM (kNm)	Shear (kN)	Concrete Dimension*
TB040/FP	4m	140	60	2690	1250	500x100	Type 0	32	3.3	1.0	700 x 800
TB050/FP	5m	140	76	3675	1250	500x100	Type 0	40	4.3	1.1	750 x 800
TB060/FP	6m	140	76	4660	1250	500x100	Type 0	47	4.2	1.0	750 x 800
TB081/FP	8m	168	89	6630	1250	600x115	Type 1	59	7.1	1.4	850 x 950
TB108/FP	10m	168	114	8600	1250	600x115	Type 2	121	12.8	1.9	950 x 1100
TB128/FP/SP†	12m	194	140/127	9840	1750	600x115	Type 2	188	20.7	2.5	1200 x 1250

*Concrete dimension based on a minimum ground bearing pressure of 150kN/m², (S = square dimension, H = depth) †Supplied as standard with spigot, length 230mm
For complete information on foundation options please refer to www.abacuslighting.com/base-hinged-fixed-columns.asp