


- NOTE**
- .. This drawing is copyright.
2. All dimensions must be checked on site before proceeding.
  3. Dimensions of new work are to be adjusted to suit the existing building where necessary. Do not assume that the existing structure or details are plumb, square or level.
  4. The contractor must report any discrepancies to the architect before proceeding.
  5. All products are to be used strictly in accordance with the manufacturer's instructions.



## KEY

-  Asbestos removal works.  
Refer to drawing 7440/134
-  MEND Funded Works -  
Enabling Works
-  Staff / Back of House Spaces
-  Public Spaces - Access to be  
maintained for the duration of the  
works
-  Contractor Access Routes
-  Staff Access Routes
-  Public Access Routes
-  Areas of Cross Over

## Enabling and Opening Up Works

Refer to drawing 7440/131 for proposed enabling and opening up works in F7 and F8.

Refer to drawings 7440/134 for proposed asbestos removal in F6, F7 and F8

Floorboards are to be labelled, lifted and stored elsewhere at First Floor level to enable a full survey of the existing floor structure to be undertaken.

If it is deemed feasible to install temporary propping from Ground Floor level up through the building, the floorboards can be lifted in full. Otherwise (if propping cannot be installed at this stage), the boards should be lifted locally in 'bands' to the full width of the room for inspection. Once relaid, the remaining 'bands' can be lifted in a sequence.

## REVISIONS

**A** Aug 2023 Additional notes added following initial Client comment  
**B** Oct 2023 Access option updated

## Rodney Melville + Partners

CHARTERED ARCHITECTS  
HISTORIC BUILDING CONSULTANTS

10 EUSTON PLACE  
LEAMINGTON SPA  
WARWICKSHIRE  
CV32 4LJ  
T 01926 881311  
F 01926 451766

E architects@rmpuk.com  
www.rmpuk.com


Rodney Melville and Partners Limited

Client  
London Borough of Haringey Council

Project  
**Bruce Castle**

Title  
First Floor  
Operations and Logistics Plan - Enabling Works

|       |            |         |      |
|-------|------------|---------|------|
| Scale | I:100 @ A1 | Job No  | 7440 |
| Date  | Aug 2023   | Drwg No | 136  |
| Drawn | HB         | Rev     | B    |

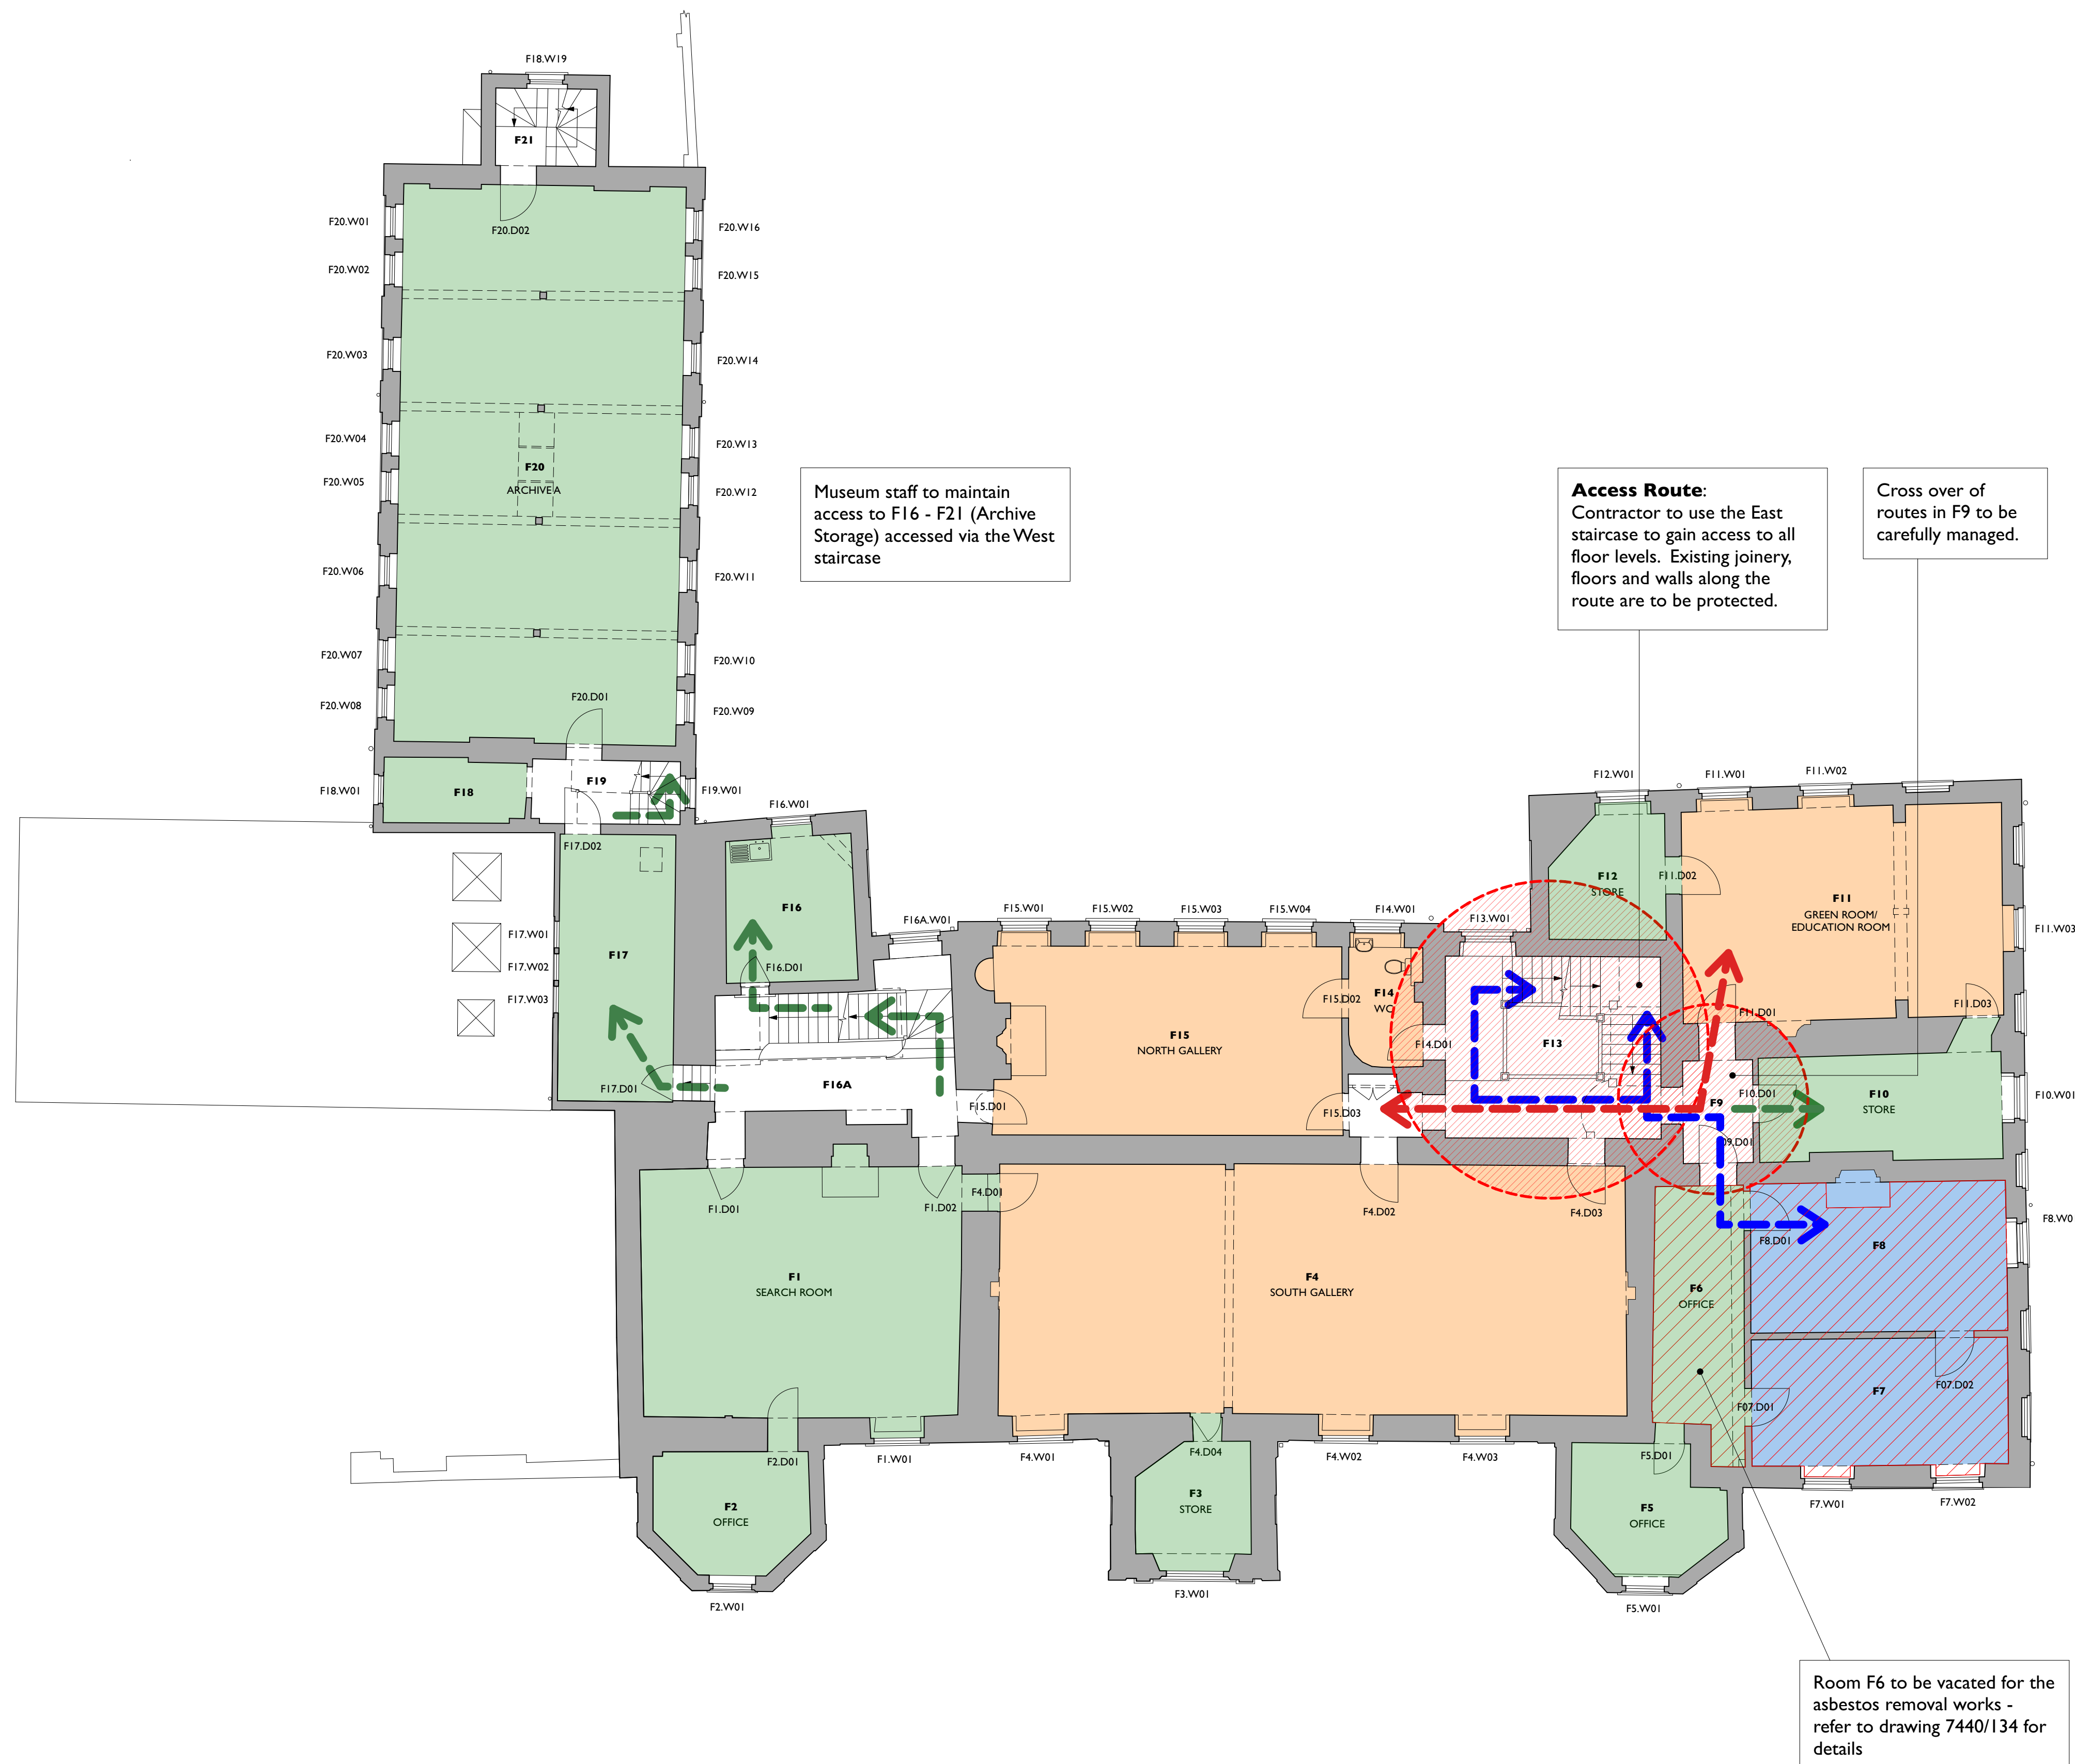

## FIRST FLOOR - OPERATIONS AND LOGISTICS PLAN ENABLING WORKS

