



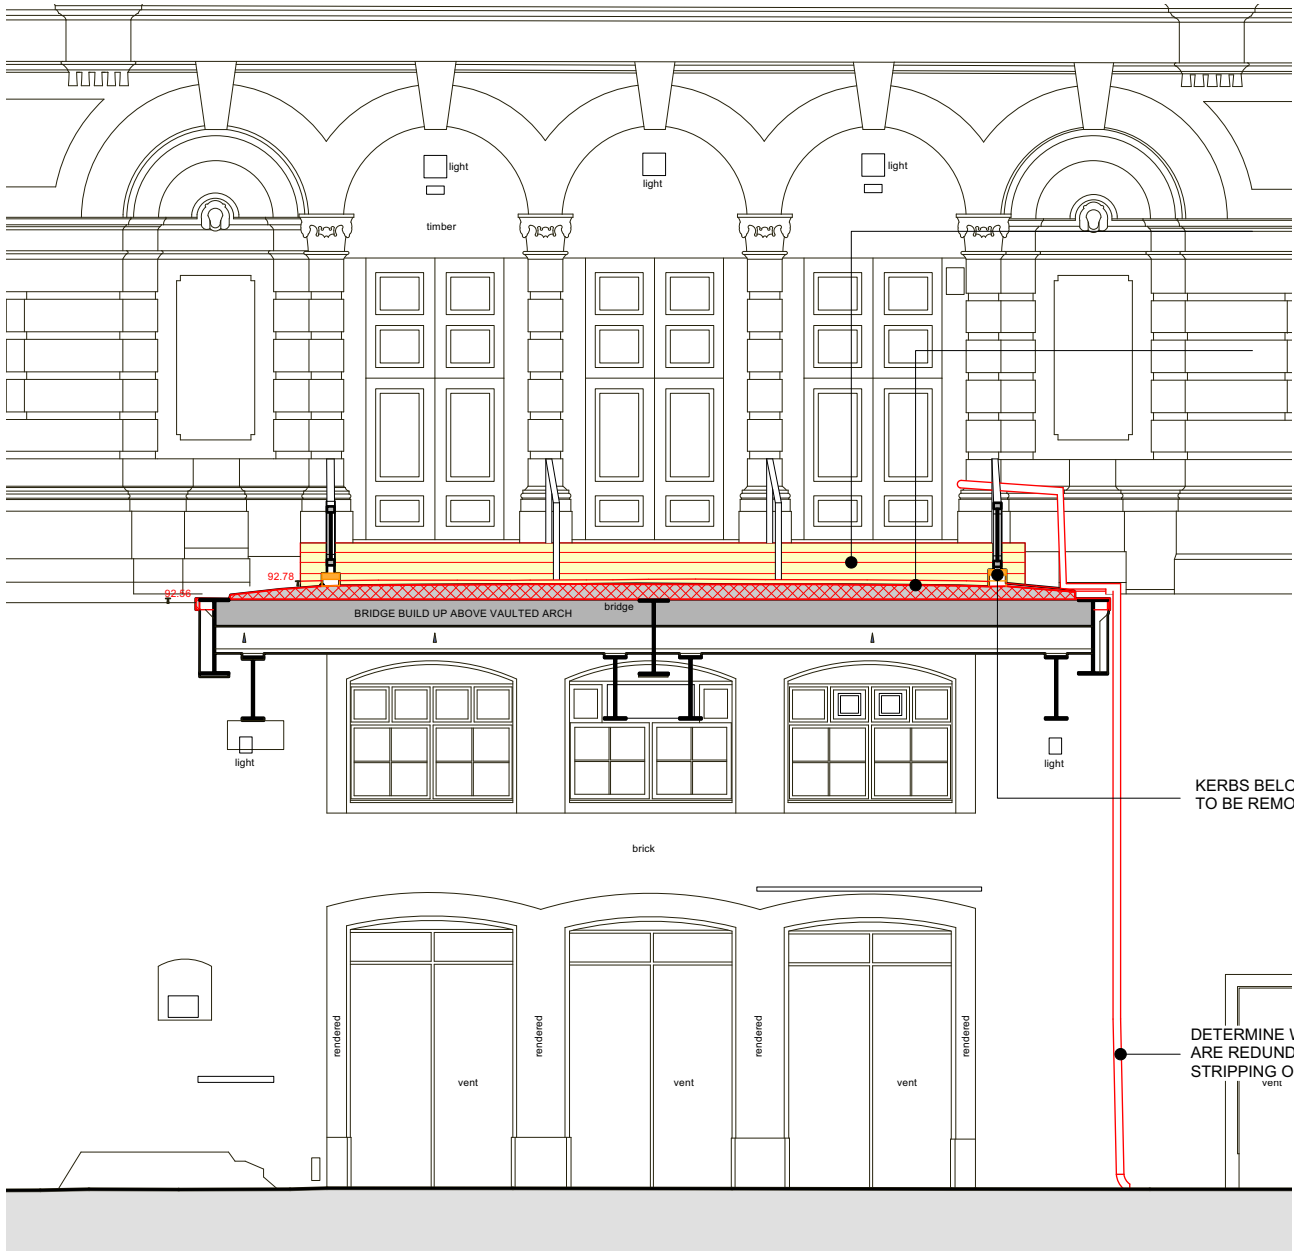

FLAGS TO BE CAREFULLY LIFTED AND SET ASIDE FOR RE-USE.

EXISTING ASPHALT COVERING TO BE STRIPED OUT. EXTENT OF ASPHALT AND CONCRETE SUBSTRATE STRIP OUT TO BE DETERMINED ON SITE

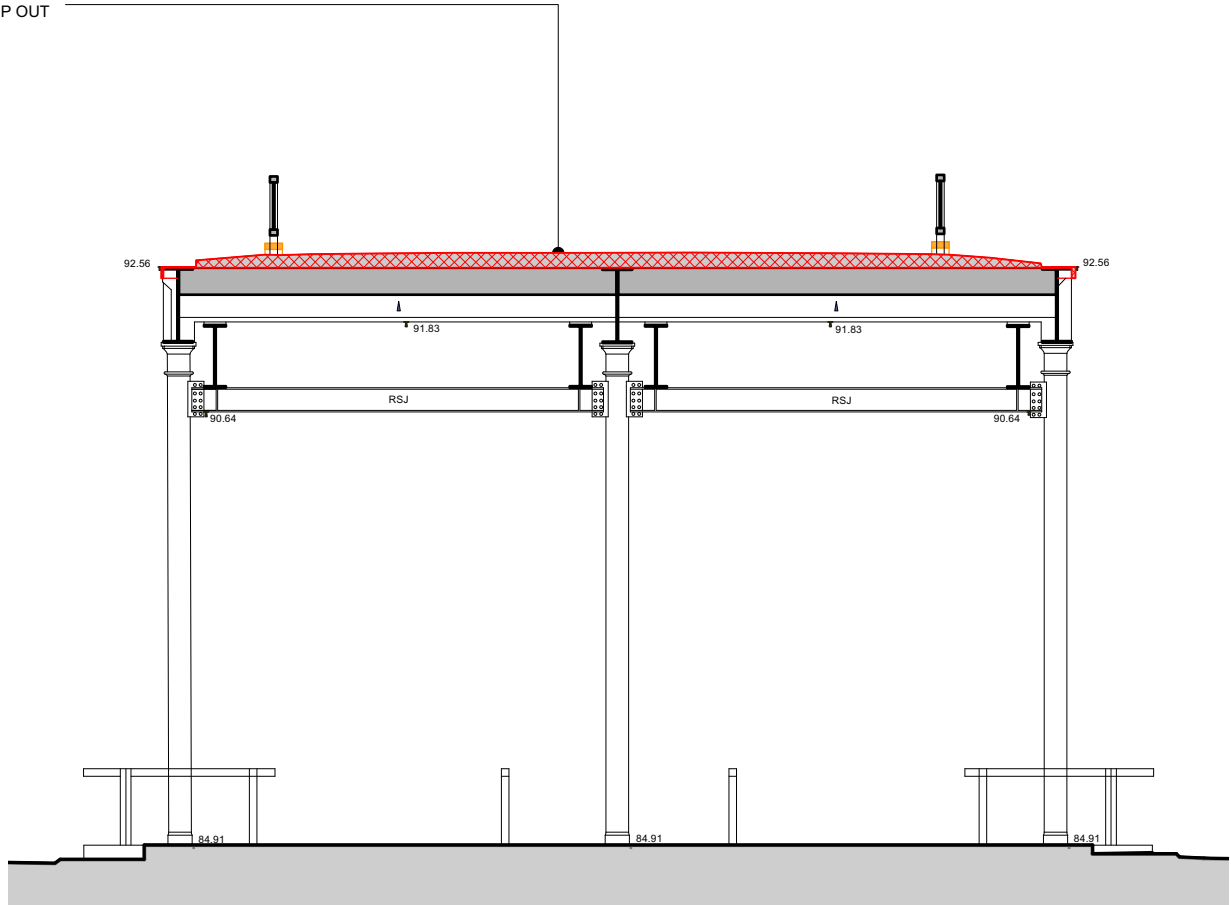

1 STRIP OUT SECTION A
Scale: 1:100

2 STRIP OUT SECTION D
Scale: 1:100

KEY

- CAREFULLY REMOVE ASPHALT COVERING FROM BRIDGE
- CAREFULLY LIFT PAVING SLABS AND SET ASIDE FOR RE-USE
- CAREFULLY LIFT STEPS AND SET ASIDE FOR RE-USE
- CAREFULLY REMOVE METAL ADD-ONS TO BASE OF BALUSTRADE
- CAREFULLY REMOVE KERBS BELOW BALUSTRADE

NOTE: GENERALLY STRIP OUT ALL DEBRIS AND PIGEON GUANO

KEY

