STEVEN ADAMS ARCHITECTS LIMITED

Schedule of proposed external finishes

118 Stapleton Hall Road, N4 4QA

16th August 2023

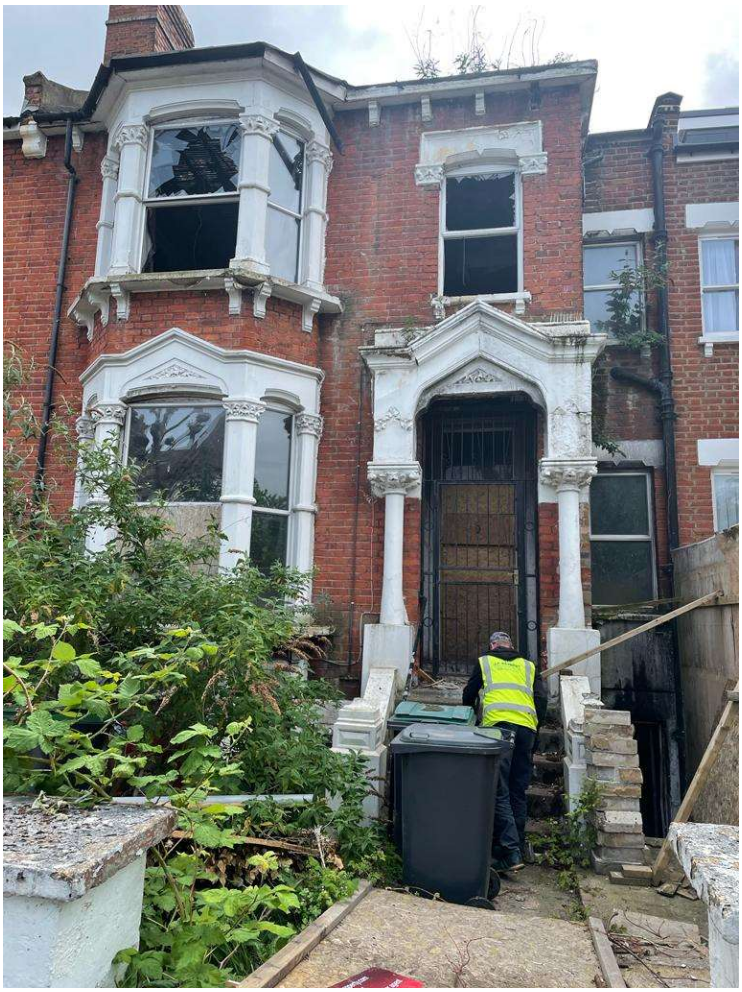

1.0 Brickwork

1.1 New brickwork to match existing - S1828/1, Parlay red stock.

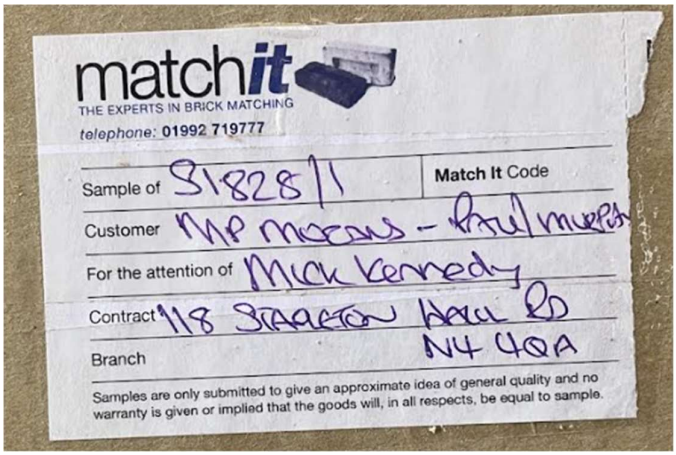

2.0 Roof

2.1 Natural Slate

3.0 Windows to front elevation.

3.1 New windows to match pattern of the existing.

Photograph of existing window to adjoining building

4.0 Windows and doors to the rear elevation

4.1 Windows and doors – Smart Aluminium Alitherm 400 in white

https://www.smartsystems.co.uk/product/10803/alitherm-400

4.2 Sliding Doors – Smart Aluminium Visoglide Plus in white

https://www.smartsystems.co.uk/product/205/visoglide-plus

5.0 Metal railings

5.1 50x10mm black painted flat steel railings

6.0 External paving

6.1 Huws Grey Pavestone Natural Stone 900x600mm calibrated fossil

https://www.huwsgray.co.uk/natural-stone-indian-sandstone/pavestone-natural-stone-900-x-600mm-calibrated-fossil-01004001-100010774-5012895#

6.2 Tiled path in 146mm square red and black matt Victorian tiles with black boarder by Tower Ceramics, Topcer range.

http://www.towerceramics.com/Products/Zgu/victorianstyle.htm

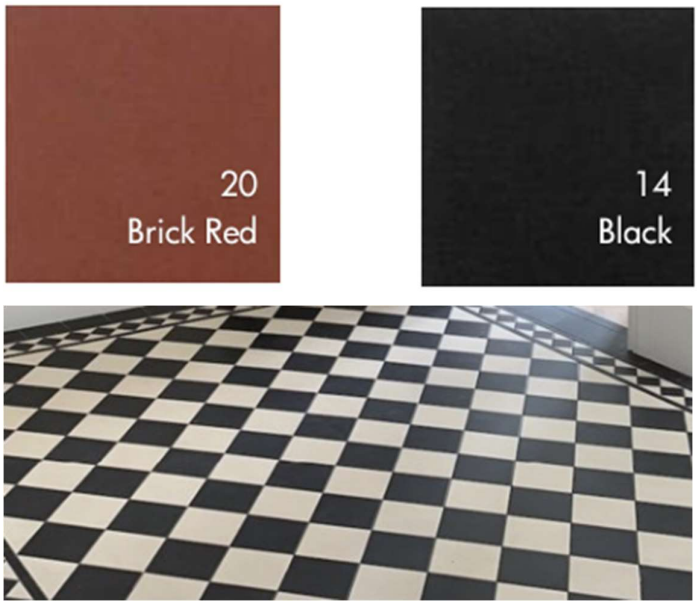

7.0 Front boundary wall:

7.1 Parlay Red stock to match existing - S1828/1 with white precast concrete copings.

7.2 White painted render to the front light well