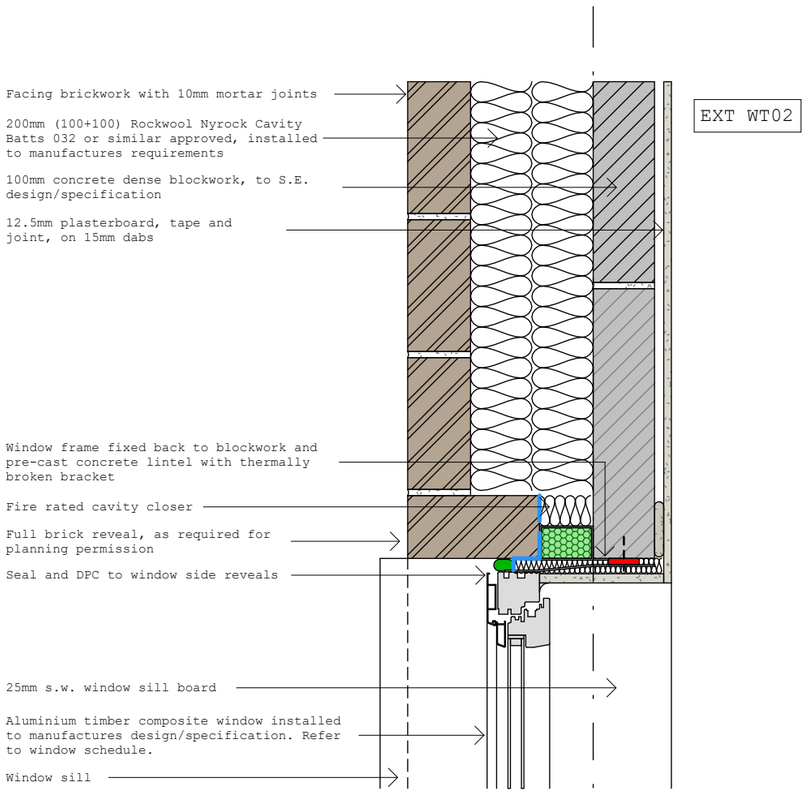

NOTE: Brick reveal may need to be a brick special, depending on frogs/perforations. TBC by brick supplier

1. Plan: Window reveal detail

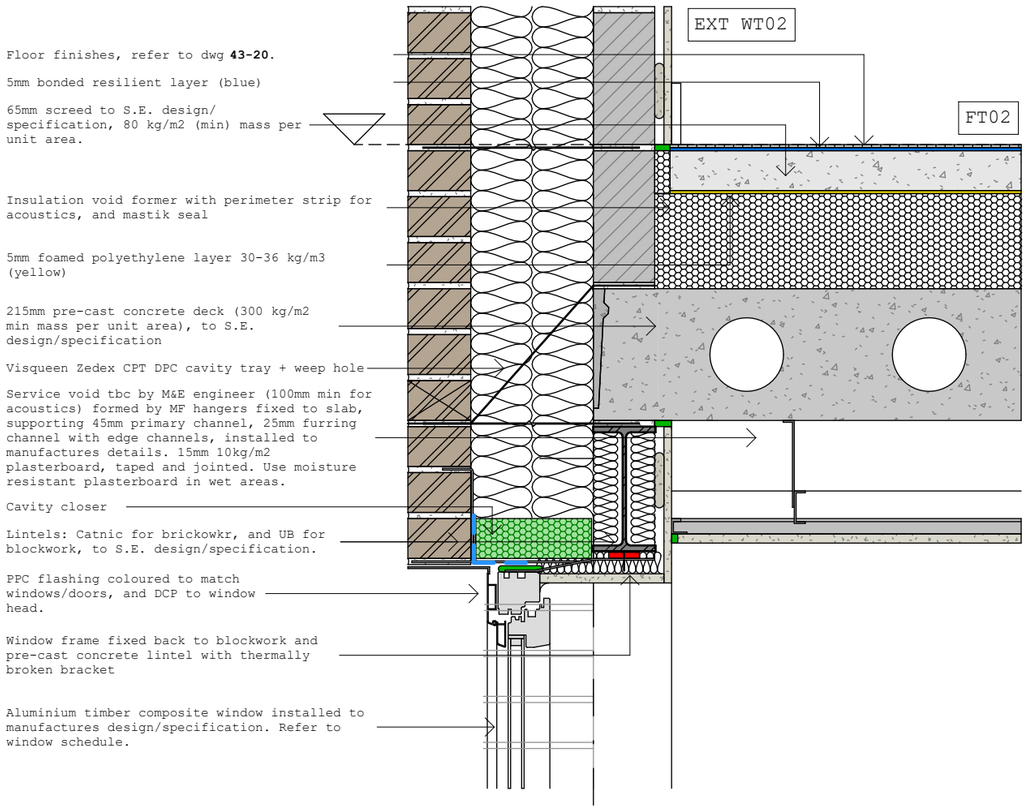

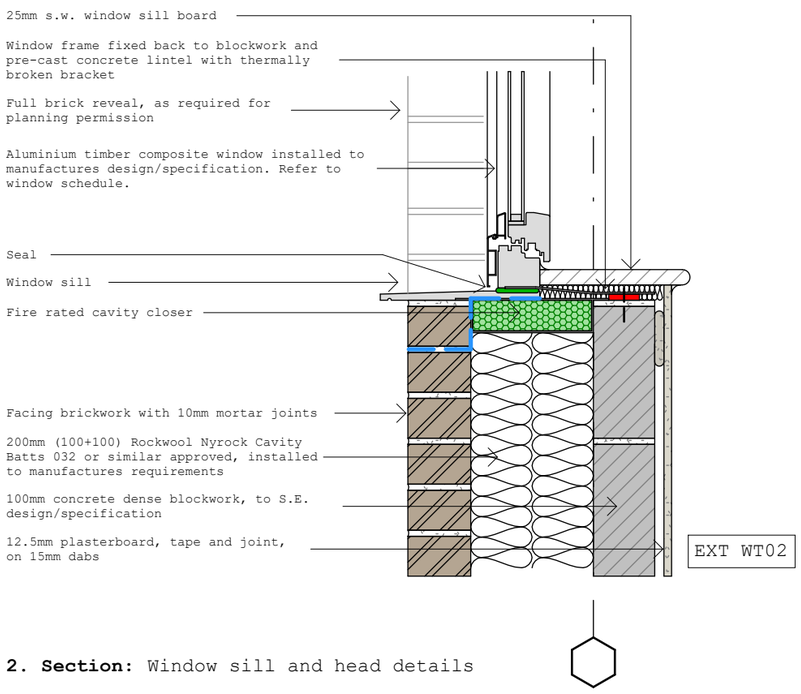

2. Section: Window sill and head details

NOTE: All drawings are subject to **Planning** and **Building Control** approval, and require input from the Structural engineer, M@E, Part o, SAPS, Acoustician and Fire Consultants.

Target Fabric U Values (W/m2.k)

Walls	0.16
Floors	0.10
Roof	0.10
Windows (glazing and frame)	1.3
Doors (both opaque and glazed)	1.3

Air Tightness: 3 (m3/h. m2@50Pa)

Thermal Bridgeing: Y-Value of 0.04 W/m2.k

Solar + Light Control: Windows and doors

G-Value: 0.45, with additional film to achieve 0.3

Membrane Legend

- Visqueen High Performance Damp Proof Membrane
- Visqueen Self Adhesive Membrane on HP Tanking Primer
- Visqueen Zedex CPT High Performance Damp Proof Course
- Visqueen Zedex CPT DPC as cavity tray
- Visqueen Pile Cap Sealer
- Visqueen VB installed to manufactures spec
- Breather Membrane TBC
- 3 layer Proteus felt system with anti root cap sheet
- Polyethylene/polythene layer, low density 0.15 mm (0.15 mm) to manufactures spec

REV	DATE	DESCRIPTION
R1	10/12/25	R Status - First Issued
P1	05/11/25	P Status - First Issue

Collaborating with:
AJC Ltd

Job: **1131** Drawing: **31-30** Revision: **R1**

Project:
Jansons Road
London, N15 4JP

Drawing:
Windows - Details Sheet 1

Date: **Dec '25** Status: **Information**

Drawn By: **MC** Checked By: **EM**

Colony Architects Ltd.
The Wine Store, Brewery Court,Theale, Reading, RG7 5AJ
+44 (0)118 380 0328
hello@colonyarchitects.com
colonyarchitects.com

1 : 10 | 0.2m | 0.4m | 0.6m | 0.8m | 1m | 1:10