



NOTE: Any doors proposed to be removed from site will need to be temporarily replaced with FD30 door blanks to maintain the fire compartmentation until such time that the new replacement door or existing door with asbestos panels removed is reinstated within its opening.



FIRST FLOOR PLAN - ASBESTOS REMOVAL WORKS

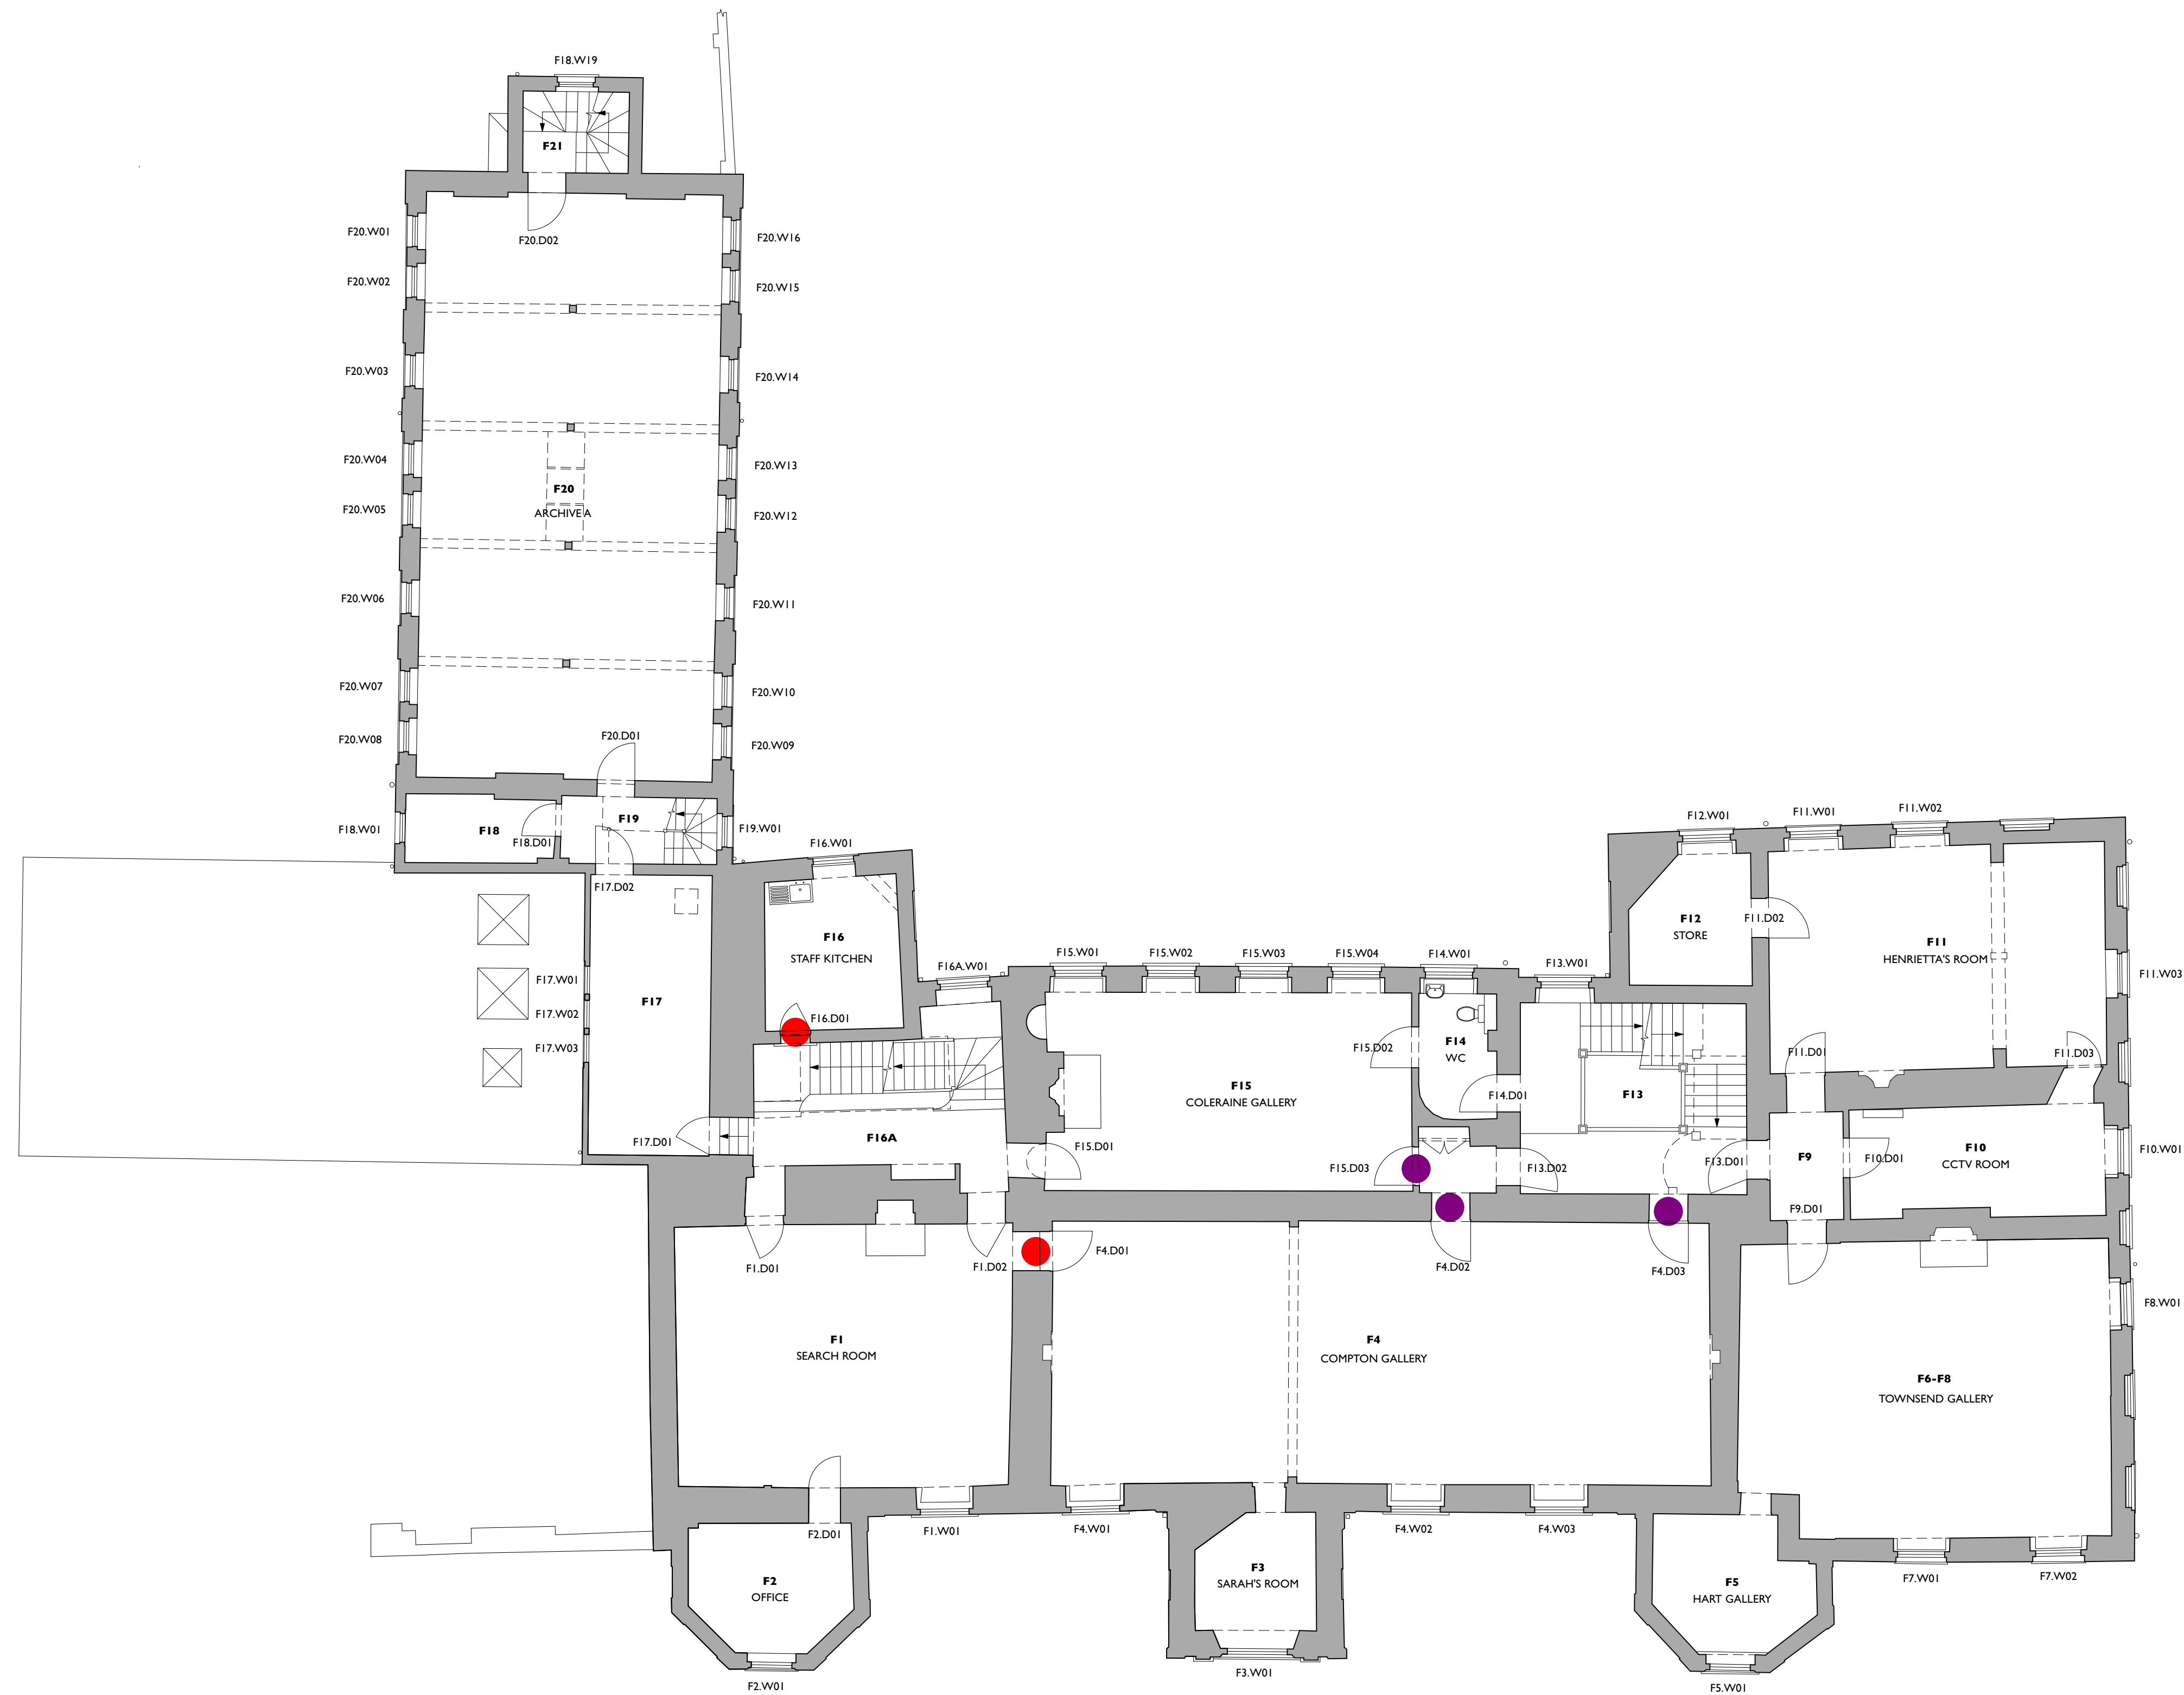

- NOTE
1. This drawing is copyright.
 2. All dimensions must be checked on site before proceeding.
 3. Dimensions of new work are to be adjusted to suit the existing building where necessary. Do not assume that the existing structure or details are plumb, square or level.
 4. The contractor must report any discrepancies to the architect before proceeding.
 5. All products are to be used strictly in accordance with the manufacturer's instructions.



KEY

- Existing door with asbestos panels removed and disposed of in a controlled environment. Replace with new doors (matching existing panelled door), providing 30min FR.
- Temporarily remove door from site, remove asbestos panels and make good existing joinery. Ensure panels are upgraded to provide 30mins FR (aspirational). Reinststate door leaf within existing opening.

Refer to Door Schedule for details.

REVISIONS

Rodney Melville + Partners

CHARTERED ARCHITECTS
HISTORIC BUILDING CONSULTANTS

10 EUSTON PLACE
LEAMINGTON SPA
WARWICKSHIRE
CV32 4LJ
T 01926 881311
F 01926 451766

E architects@rmpuk.com
www.rmpuk.com

Rodney Melville and Partners Limited

Client:
London Borough of Haringey Council

Project:
Bruce Castle

Title:
First Floor Plan
Asbestos Removal Works

Scale	1:100 @ A1	Job No	7440
Date	February 2026	Drawn No	911
Drawn	HB	Rev	