


Setting out and fixing details to be read in accordance with structural engineers drawings

All timber and steel sizes to be specified by structural engineer

- No. Note
- All dimensions to be verified on site by GENERAL CONTRACTOR prior to any work, setting out or shop drawings being prepared.
 - Drawings not to be scaled. Work to figured dimensions only.
 - © copyright SAUNDERS BOSTON LIMITED. All rights reserved.
This drawing remains the property of SAUNDERS BOSTON LIMITED at all times and may not be reproduced or copied in whole or in part without their prior written consent.
 - This drawing and related specifications are for use only in the stated location.
 - This drawing is to be read in conjunction with all other Consultants drawings and specifications.
 - Drainage has not been surveyed and any/all pipe locations and below ground drainage runs are indicative.
 - It is assumed that all works will be carried out by a competent contractor who will be working, where appropriate, to an approved method statement.

Existing Levels Proposed Levels
Existing Ground Proposed Ground Fill
Ground for excavation

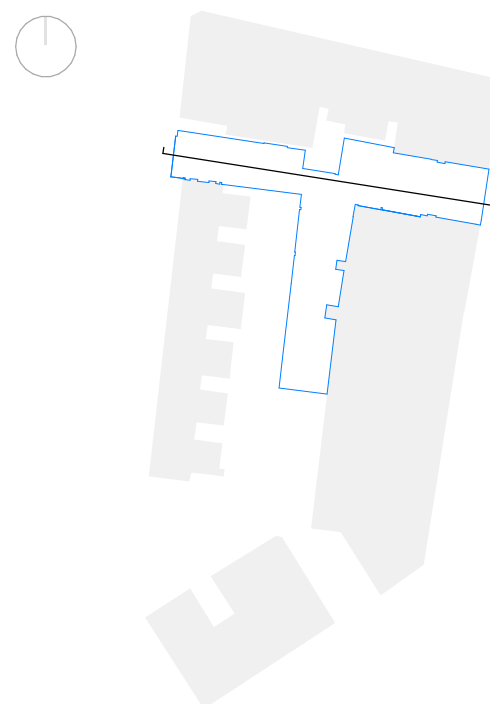

1 F&B Containers don't require DDA compliant access as they will not be open for customers to enter.

2 Level access to other vendor containers in compliance with Approved documents B, K + M. Levels indicate existing and proposed finish floor levels. See drawing 0621 Suffield Road Entrance for setting out.

3 4Sure container with bespoke retail and F&B fit-out polyester powder coated to RAL 3020. Allow for all drainage, service connections and ventilation. Refer to drawing 0609 for layout + setting out plan of containers. For container levels refer to drawings 0610-0613.

4 Single leaf timber gates stained 'Coral Red' RAL 3016. Timber infill panels also to be stained Coral Red RAL 3016. Armorgard gorilla gas canister storage cages and entry access control (behind gates).

5 Tarmac Asphalt finish to external market paved areas - finish on existing tarmac to level appropriately.

6 Ground fill to bring existing levels to proposed level and provide level access into vendor units - finished asphalt finish as specified throughout external market.

7 CLD Exempla timber (2330mm high) perimeter fencing lining neighbourhood walls around market terraces. Profiled 'Opulent Green' RAL 160 20 20 coated finish for continuity.

8 Pressed metal trim to bottom (all sides) of container for continuous finish and rodent prevention, exposed sections finished with RAL 3020 to match containers.

9 Bespoke CLD Gates to Main Entrances, powder coated RAL 160 20 20 to match timber slats on facades.

10 Litter bins - Product: Recycled Plastic Covered Litter Bins, manufacturer: British Recycled Plastic Pow Carbon Products Limited.

07	Construction Issue	17-03-25	MM	BH
06	SE Comments 2	24-02-25	MM	BH
05	SE Comments	24-02-25	MM	BH
04	General design updates	20-02-25	MM	BH
03	Stage 4 - Revised Pergola	29-01-25	MM	BH
02	Stage 4 Issue update to S3	29-11-24	MM	BH
01	Stage 4 Issue	14-11-24	AR	BH
No.	Revision	Date	CHK	Auth



Eastern Gate House, 119 Newmarket Road, Cambridge CB5 8HA
T 01223 367733
office@saundersboston.co.uk

The Generator, The Gallery, King's Wharf
The Quay, Exeter EX2 4AN
T 01392 348627
www.saundersboston.co.uk

CONSTRUCTION ISSUE

SBA Project Code	Drawn	AR	Date	09/03/24
2084	Checked	BH	Suitability Code	C1

Client
ETEC - Places for London

Job
Seven Sisters - External Market

Drawing
Section A

Scale
As indicated @A1

Revision
07

project originator zone level type role number code
2898-SBA-02-00-DR-A-0610-C1



Section A
1 : 50

Scale 1:50
0 500 1000 1500 2500mm