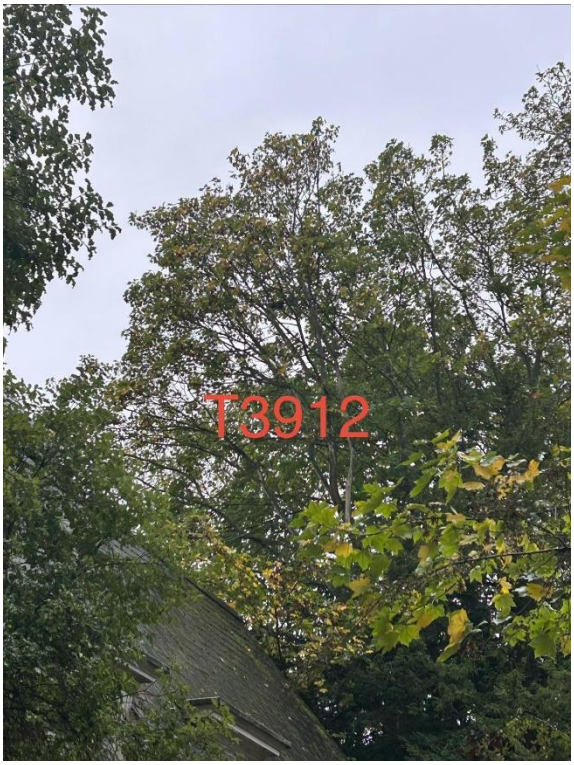
Highgate Junior School, 3 Bishopswood Road N6 4PL

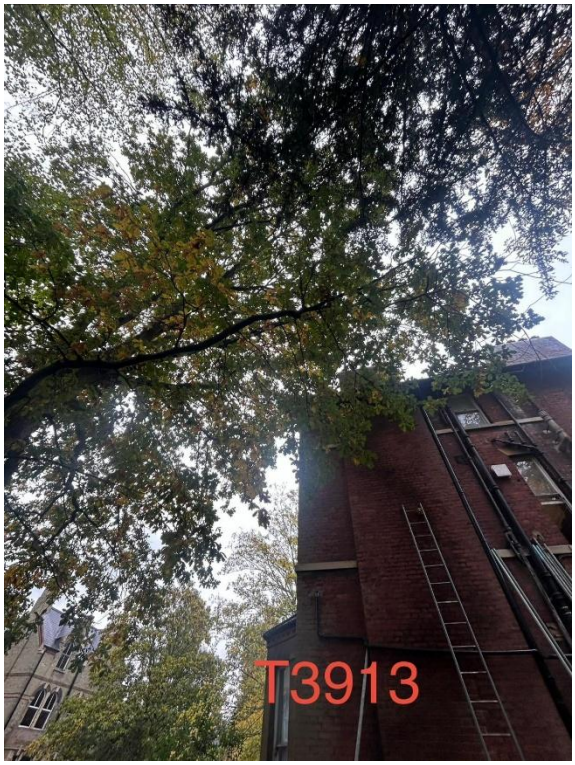



Application relates to T3910, T3912, T3913, T3914, T3916, T3917, T3918, T3919, T3920, T3922, T3923, T3924 and T3926

| Tree ID | Common Name | Height (m) | DBH (mm) | Crown Spread (m) | Age Class | Physiological Condition | Structural Condition | Observations | Recommendation |
|---|---|---|---|---|---|---|---|---|---|
| 3910 | Common Beech | 25 | 800 | 8 | M | Good | Good | Tree growing very close to building. Deadwood over entrance at approximately 18m. | Reduce back from building by 2m. and remove dead wood. |
| 3911 | Common Lime | 25 | 800 | 14 | M | Good | Fair | Basal decay visible at base. Strong buttresses, good adaptive growth. | Investigate internal decay with Resistograph to establish residual wall. |
| 3912 | Sycamore | 22 | 400 | 16 | M | Good | Good | 3 stem tree. One stem grows towards neighbouring building. | Reduce this stem by 3m and reduce back from building by 2-3m. |
| 3913 | Common Oak | 25 | 800 | 20 | M | Good | Fair | Sunken area between buttresses may be consistent with internal decay, sounding mallet resonance inconclusive. Tree growing very close to building. | Assess base with Resistograph to establish presence or absence of decay. Reduce back from building by 2m. Remove significant deadwood. |
| 3914 | Common Horse Chestnut | 220 | 900 | 9 | M | Good | Good | Epicormic growing towards building. | Reduce back from building to give 2m clearance. |
| 3915 | Common Oak | 13 | 700 | 15 | M | Fair | Good | Dead wood throughout crown. | Remove significant dead wood throughout crown. |
| 3916 | Cupressus sp. | 9 | 200 | 2.5 | OM | Poor | Good | Dying tree. | Monolith to approximately 3m. |
| 3917 | Sycamore | 14 | 300 | 8 | M | Good | Good | Tree touching building. | Reduce back from building by 2m. |
| 3918 | Common Yew Group | 8 | 250 | 5 | M | Good | Good | Group of Yew growing close to building. | Reduce back from building by 2-3m. |
| 3919 | Plum | 5 | 200 | 5 | OM | Fair | Poor | Presence of Chicken of the Woods fungal fruit body, cracking. | Fell tree. |
| 3920 | Unknown | 6 | 150 | 4 | OM | Poor | Fair | Dying tree. | Fell. |
| 3921 | Common Oak | 12 | 1200 | 12 | M | Fair | Good | Dead wood throughout crown. | Remove significant dead wood throughout crown. |
| 3922 | Group of trees including Common Oak | 15 | 500 | 10 | M | Good | Good | Several trees along Bishopswood Road are hanging over and into the footpath and highway. | Raise crowns to 3m over paths and 6m over highway |
| 3923 | Mixed species group | 15 | 700 | 10 | M | Fair | Good | Group of trees along Hampstead Lane. Overhanging highway and touching building. | Lift crowns over building to achieve 2.5m clearance. Fell small Sycamore close to SE corner of building. Lift crowns on road side to 6m and reduce any remain road side growth by 3m. Remove any significant dead wood. |
| 3924 | Holly | 7 | 350 | 6 | OM | Poor | Fair | 2 dying Holly trees. | Fell. |
| 3925 | Turkey Oak | 25 | 1100 | 15 | M | Good | Fair | Sounding mallet resonance consistent with bark necrosis and/or internal basal decay. | Assess residual wood with Resistograph to establish internal condition. |
| 3926 | Common Lime | 18 | 1000 | 6 | OM | Good | Fair | Ganoderma fungal brackets on SW buttress and new brackets on NE buttresses. | Reduce tree to approximately 10m. |


T3910


T3912


T3913


T3914


T3916

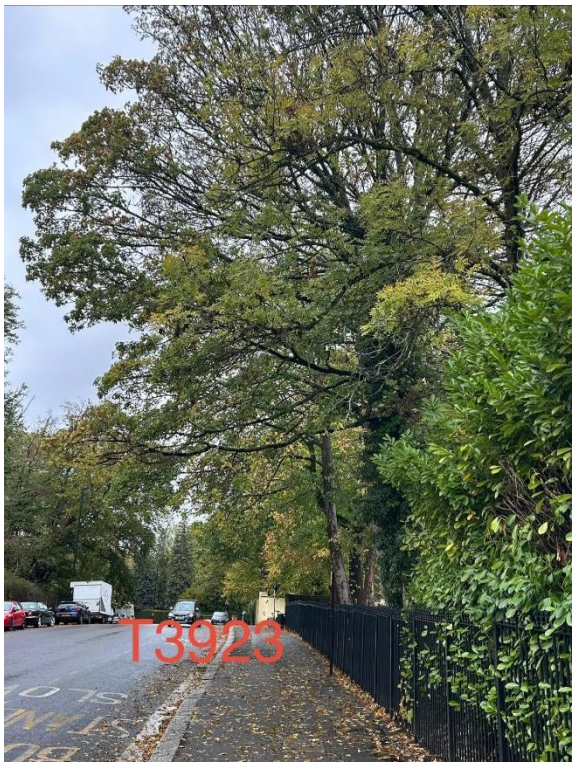

T3917


T3918


T3919


T3920


T3922


T3923


T3923


T3923


T3924


T3926