
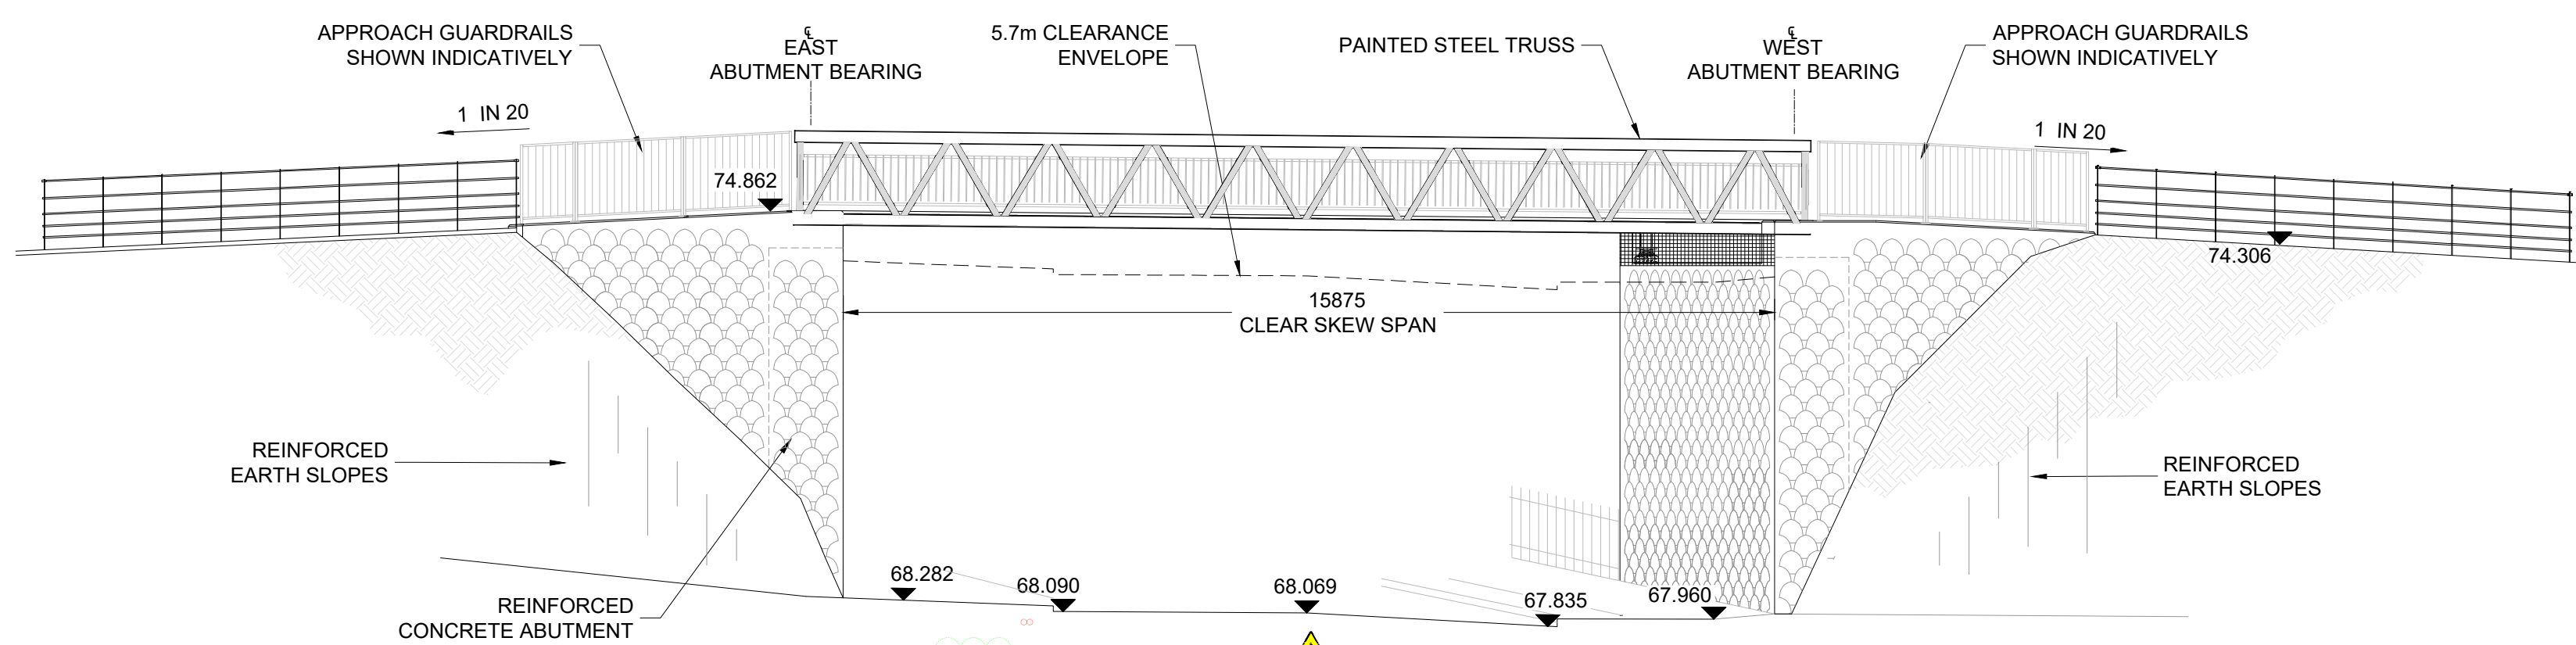
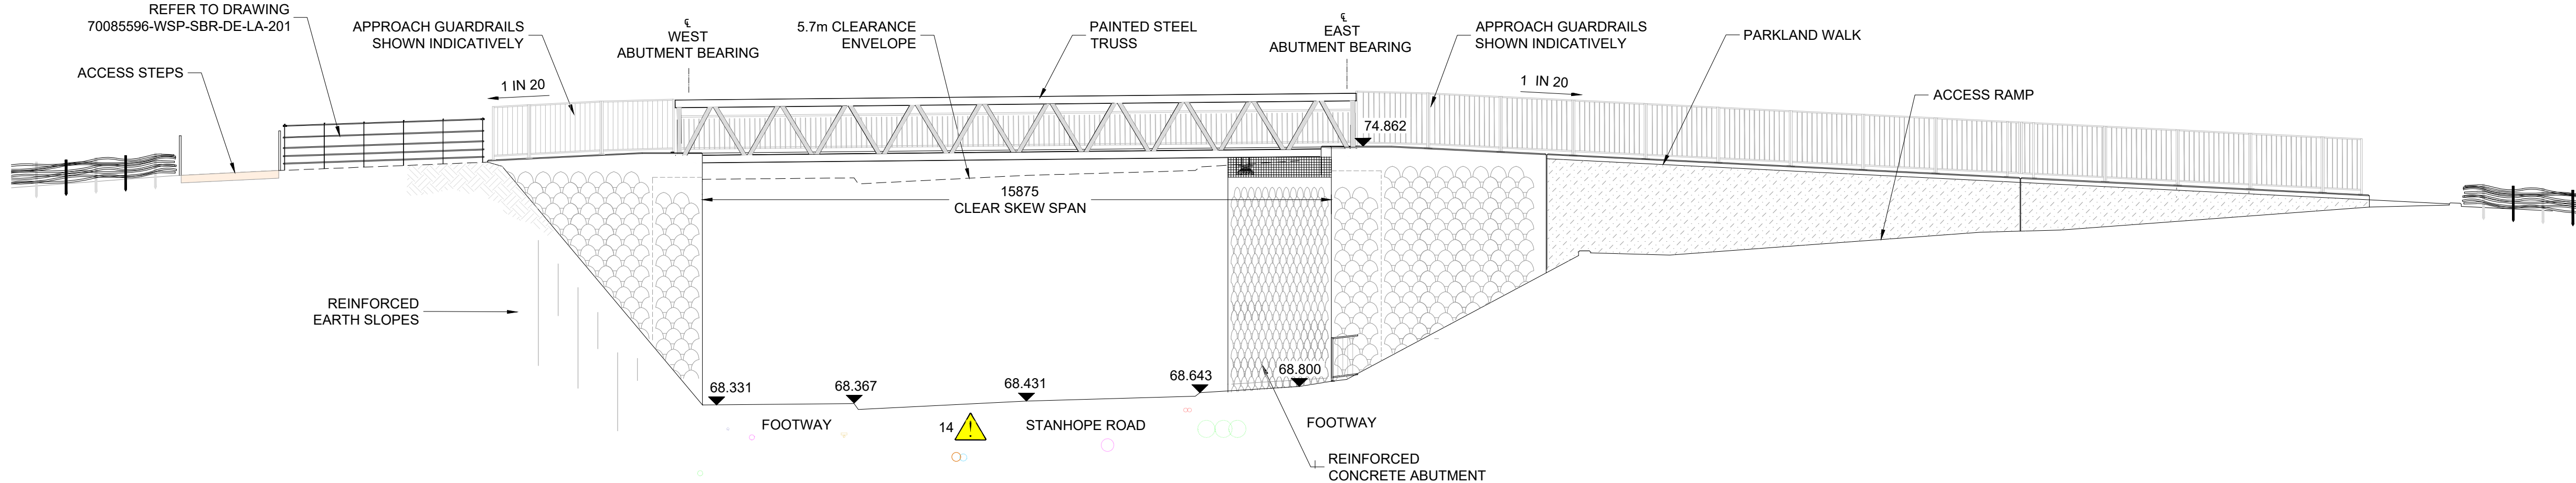




File name: \\UK.WSPGROUP.COM\CENTRAL DATA\PROJECTS\70085596-WSP-SBR-DR-BR-0001 C103.DWG, printed on 20 October 2023 12:30:24, by Clifford, Alex

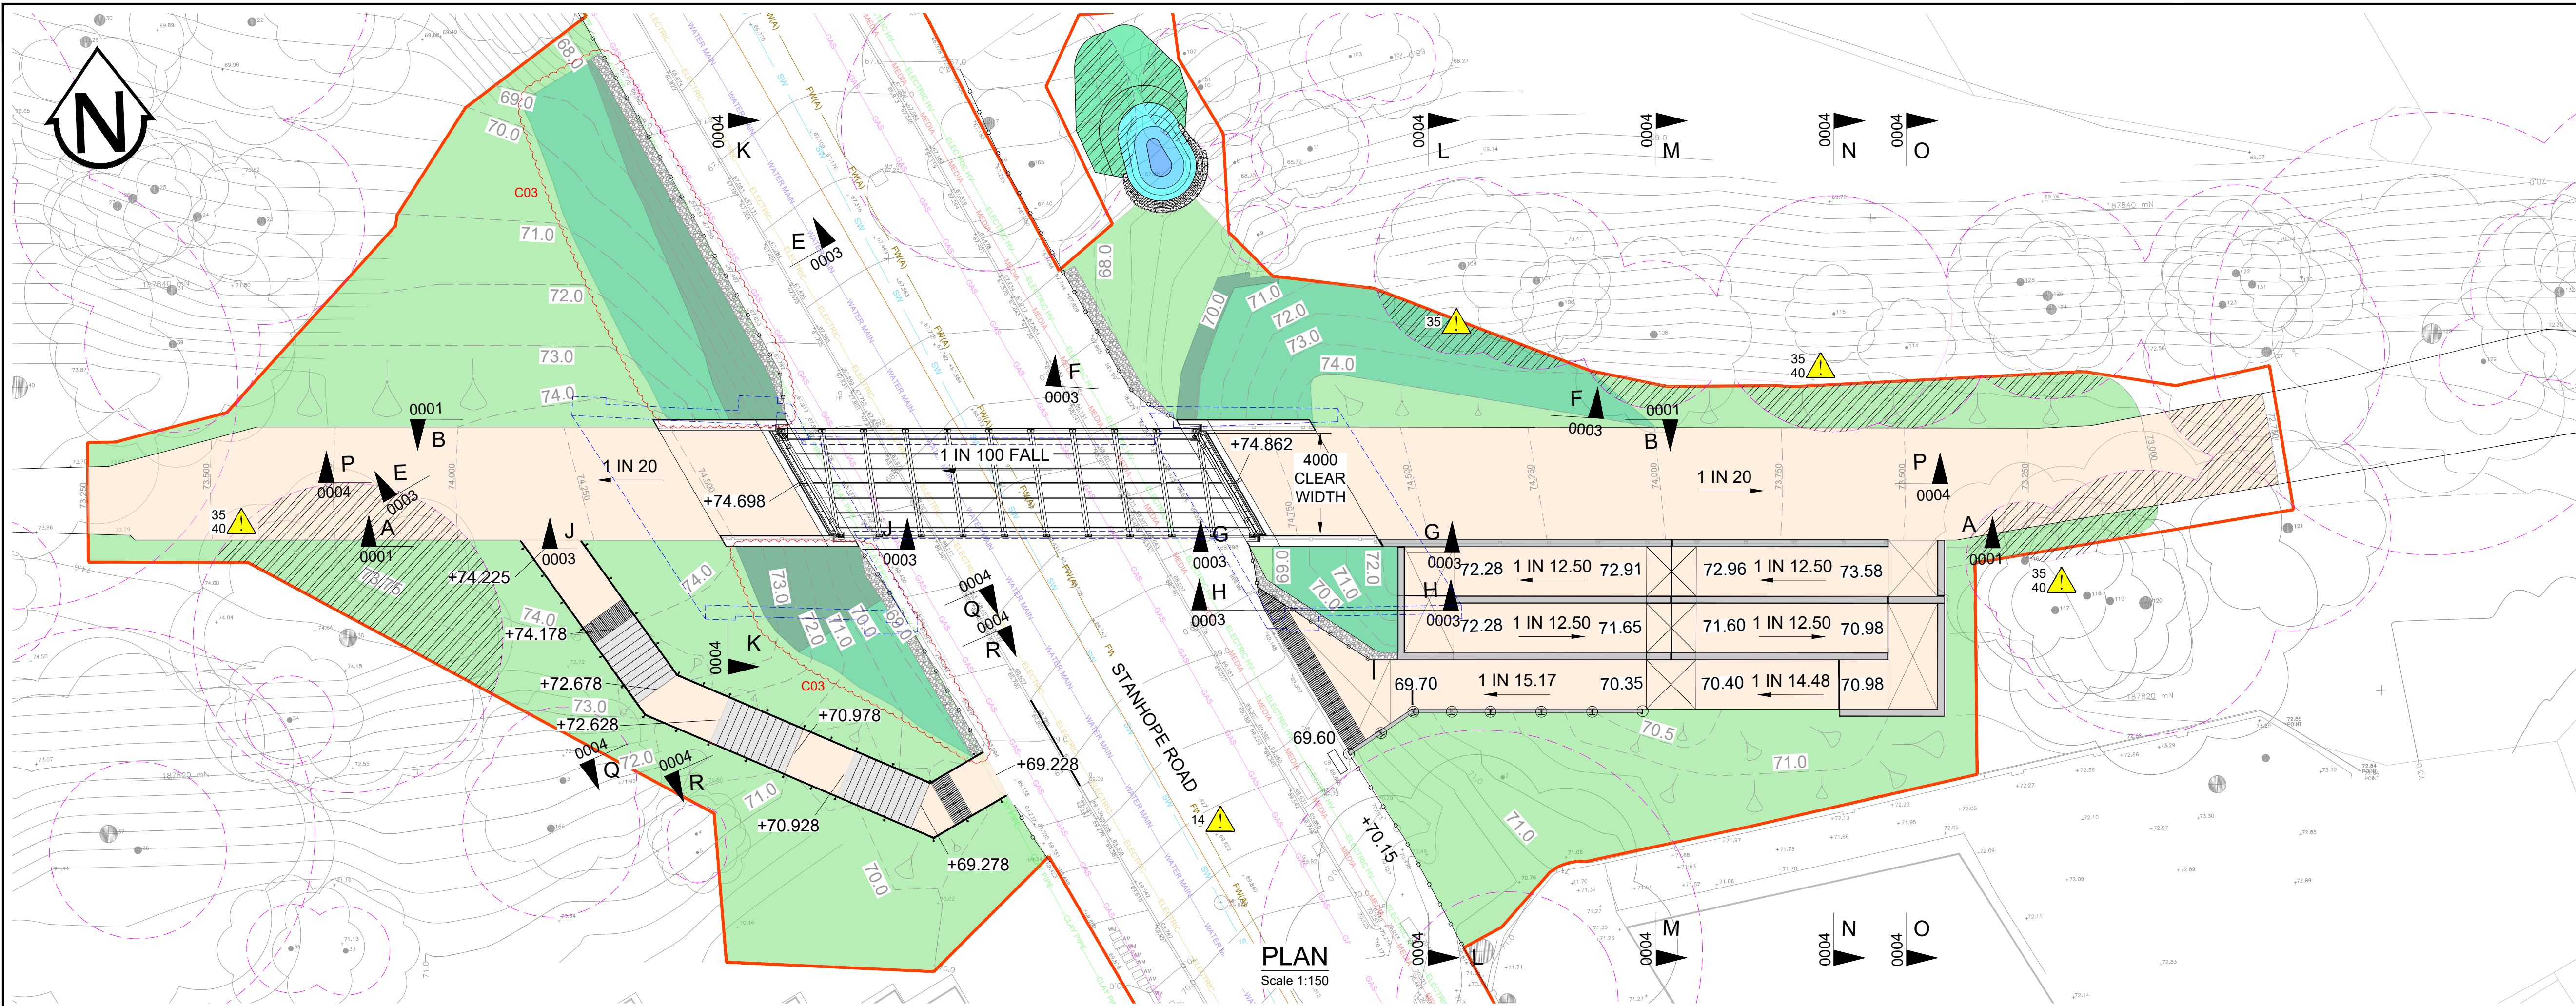

SIGNIFICANT RESIDUAL RISKS

HEALTH AND SAFETY RISKS ARE IDENTIFIED IN THE T446: DESIGN RISK MANAGEMENT SCHEDULE, SIGNIFICANT RESIDUAL RISKS ARE LISTED BELOW:

- 14. SERVICES/UTILITIES BENEATH CARRIAGEWAY SURFACE, NOTABLY GAS MAIN UNDER THE WEST FOOTWAY AND EAST EXTENT OF CARRIAGEWAY, AND HV CABLES UNDER THE EAST FOOTWAY. THAMES WATER PIPES AND COMMUNICATIONS CABLES ARE ALSO PRESENT.
- 35. EXCAVATIONS DISTURBING ROOTS, IMPACTING TREE STABILITY. CONTRACTOR TO MINIMISE OVER EXCAVATING DURING CONSTRUCTION.
- 40. TREES TO BE SURCHARGED DUE TO INCREASE IN LEVEL TO BRIDGE APPROACHES, ROOT PROTECTION MEASURES TO BE INSTALLED.

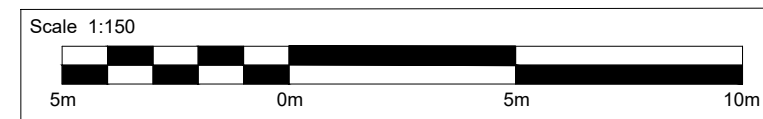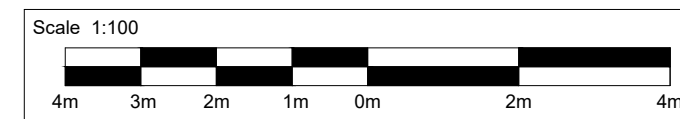

DO NOT SCALE

NOTES

- ALL DIMENSIONS ARE IN MILLIMETRES UNLESS STATED OTHERWISE.
- ALL LEVELS ARE IN METRES A.O.D. UNLESS STATED OTHERWISE.
- FOR LANDSCAPE FEATURES, REFER TO LANDSCAPE PLAN 70085596-WSP-SBR-DR-LA-100, 101, 104 TO 107.
- FOR SUBSTRUCTURE AND FOUNDATION DETAILS REFER TO DRAWINGS 70085596-WSP-SBR-DR-BR-1700 TO 1721.
- FOR SUPERSTRUCTURE DETAILS REFER TO DRAWINGS 70085596-WSP-SBR-DR-BR-1800 TO 1803.
- FOR DRAINAGE DESIGN DETAILS REFER TO DRAWING 70085596-WSP-SBR-DR-BR-0500.
- REINFORCED EARTH EMBANKMENTS DESIGN, REFER TO TENSAR DETAILED DESIGN DRAWINGS TD/23/002/D1_SH1, SH2 AND SH3 FOR DETAILS.

LEGEND

- EXISTING STRUCTURE OUTLINE
- RAILINGS AT STANHOPE ROAD LEVEL
- PERMANENT WORKS BOUNDARY
- PARKLAND WALK ACCESS
- BRIDGE DECK
- TREE ROOT PROTECTION
- ROOT PROTECTION MEASURES REQUIRED FOR PERMANENT WORKS INSTALLATION
- LANDSCAPED AREAS / EMBANKMENT RE-PROFILING
- REINFORCED EARTH EMBANKMENT FACE (TENSARTECH NATURALGREEN SLOPE) / LANDSCAPED AREAS
- REINFORCED EARTH EMBANKMENT FACE (BAGWORK WRAPAROUND SLOPE) / LANDSCAPED AREAS
- FILTER DRAIN INSTALLED TO TOE OF SLOPE
- LANDINGS
- FW(A) FOUL WATER
- ABANDONED SEWER
- SW SURFACE WATER SEWER
- WATER MAIN MAINS WATER
- CLAY PIPE CLAY PIPE
- ELECTRIC HV ELECTRIC HV
- ELECTRIC LV ELECTRIC LV
- GAS GAS
- MEDIA MEDIA

C03	20/10/2023	DR	ISSUED FOR CONSTRUCTION FOLLOWING UPDATES FROM TENSAR	AC	BH
C02	17/07/2023	DR	MINOR NOTE AMENDMENT	AC	BH
C01	27/06/2023	AC	ISSUED FOR CONSTRUCTION	BH	ME
P05	02/05/2023	AC	MINOR AMENDMENTS	BH	ME
P04	06/04/2023	DR	MINOR AMENDMENTS	AC	BH
P03	10/01/2023	DR	MINOR AMENDMENTS	GW	BH
P02	19/12/2022	DR	REVISED BASED ON COMMENTS RECEIVED FROM LBH	GW	BH
P01	15/07/2022	DR	FOR REVIEW AND COMMENT	GW	BH
REV	DATE	BY	DESCRIPTION	CHK	APP

DRAWING STATUS:

FOR CONSTRUCTION

2 London Square, Cross Lanes, Guildford, Surrey, GU1 1UN
T+ 44 (0) 1483 528 400
wsp.com

CLIENT:

LONDON BOROUGH OF HARINGEY

SITE/PROJECT:

STANHOPE ROAD BRIDGE

TITLE:

GENERAL ARRANGEMENT
BRIDGE AND ABUTMENTS

SCALE @ A1:	AS SHOWN	CHECKED:	GW	APPROVED:	BH
PROJECT NO:	70085596	DESIGNED:	GW	DRAWN:	DR
				DATE:	OCTOBER 2023
DRAWING NO:	70085596-WSP-SBR-DR-BR-0001				REV:
					C03

© WSP UK Ltd