


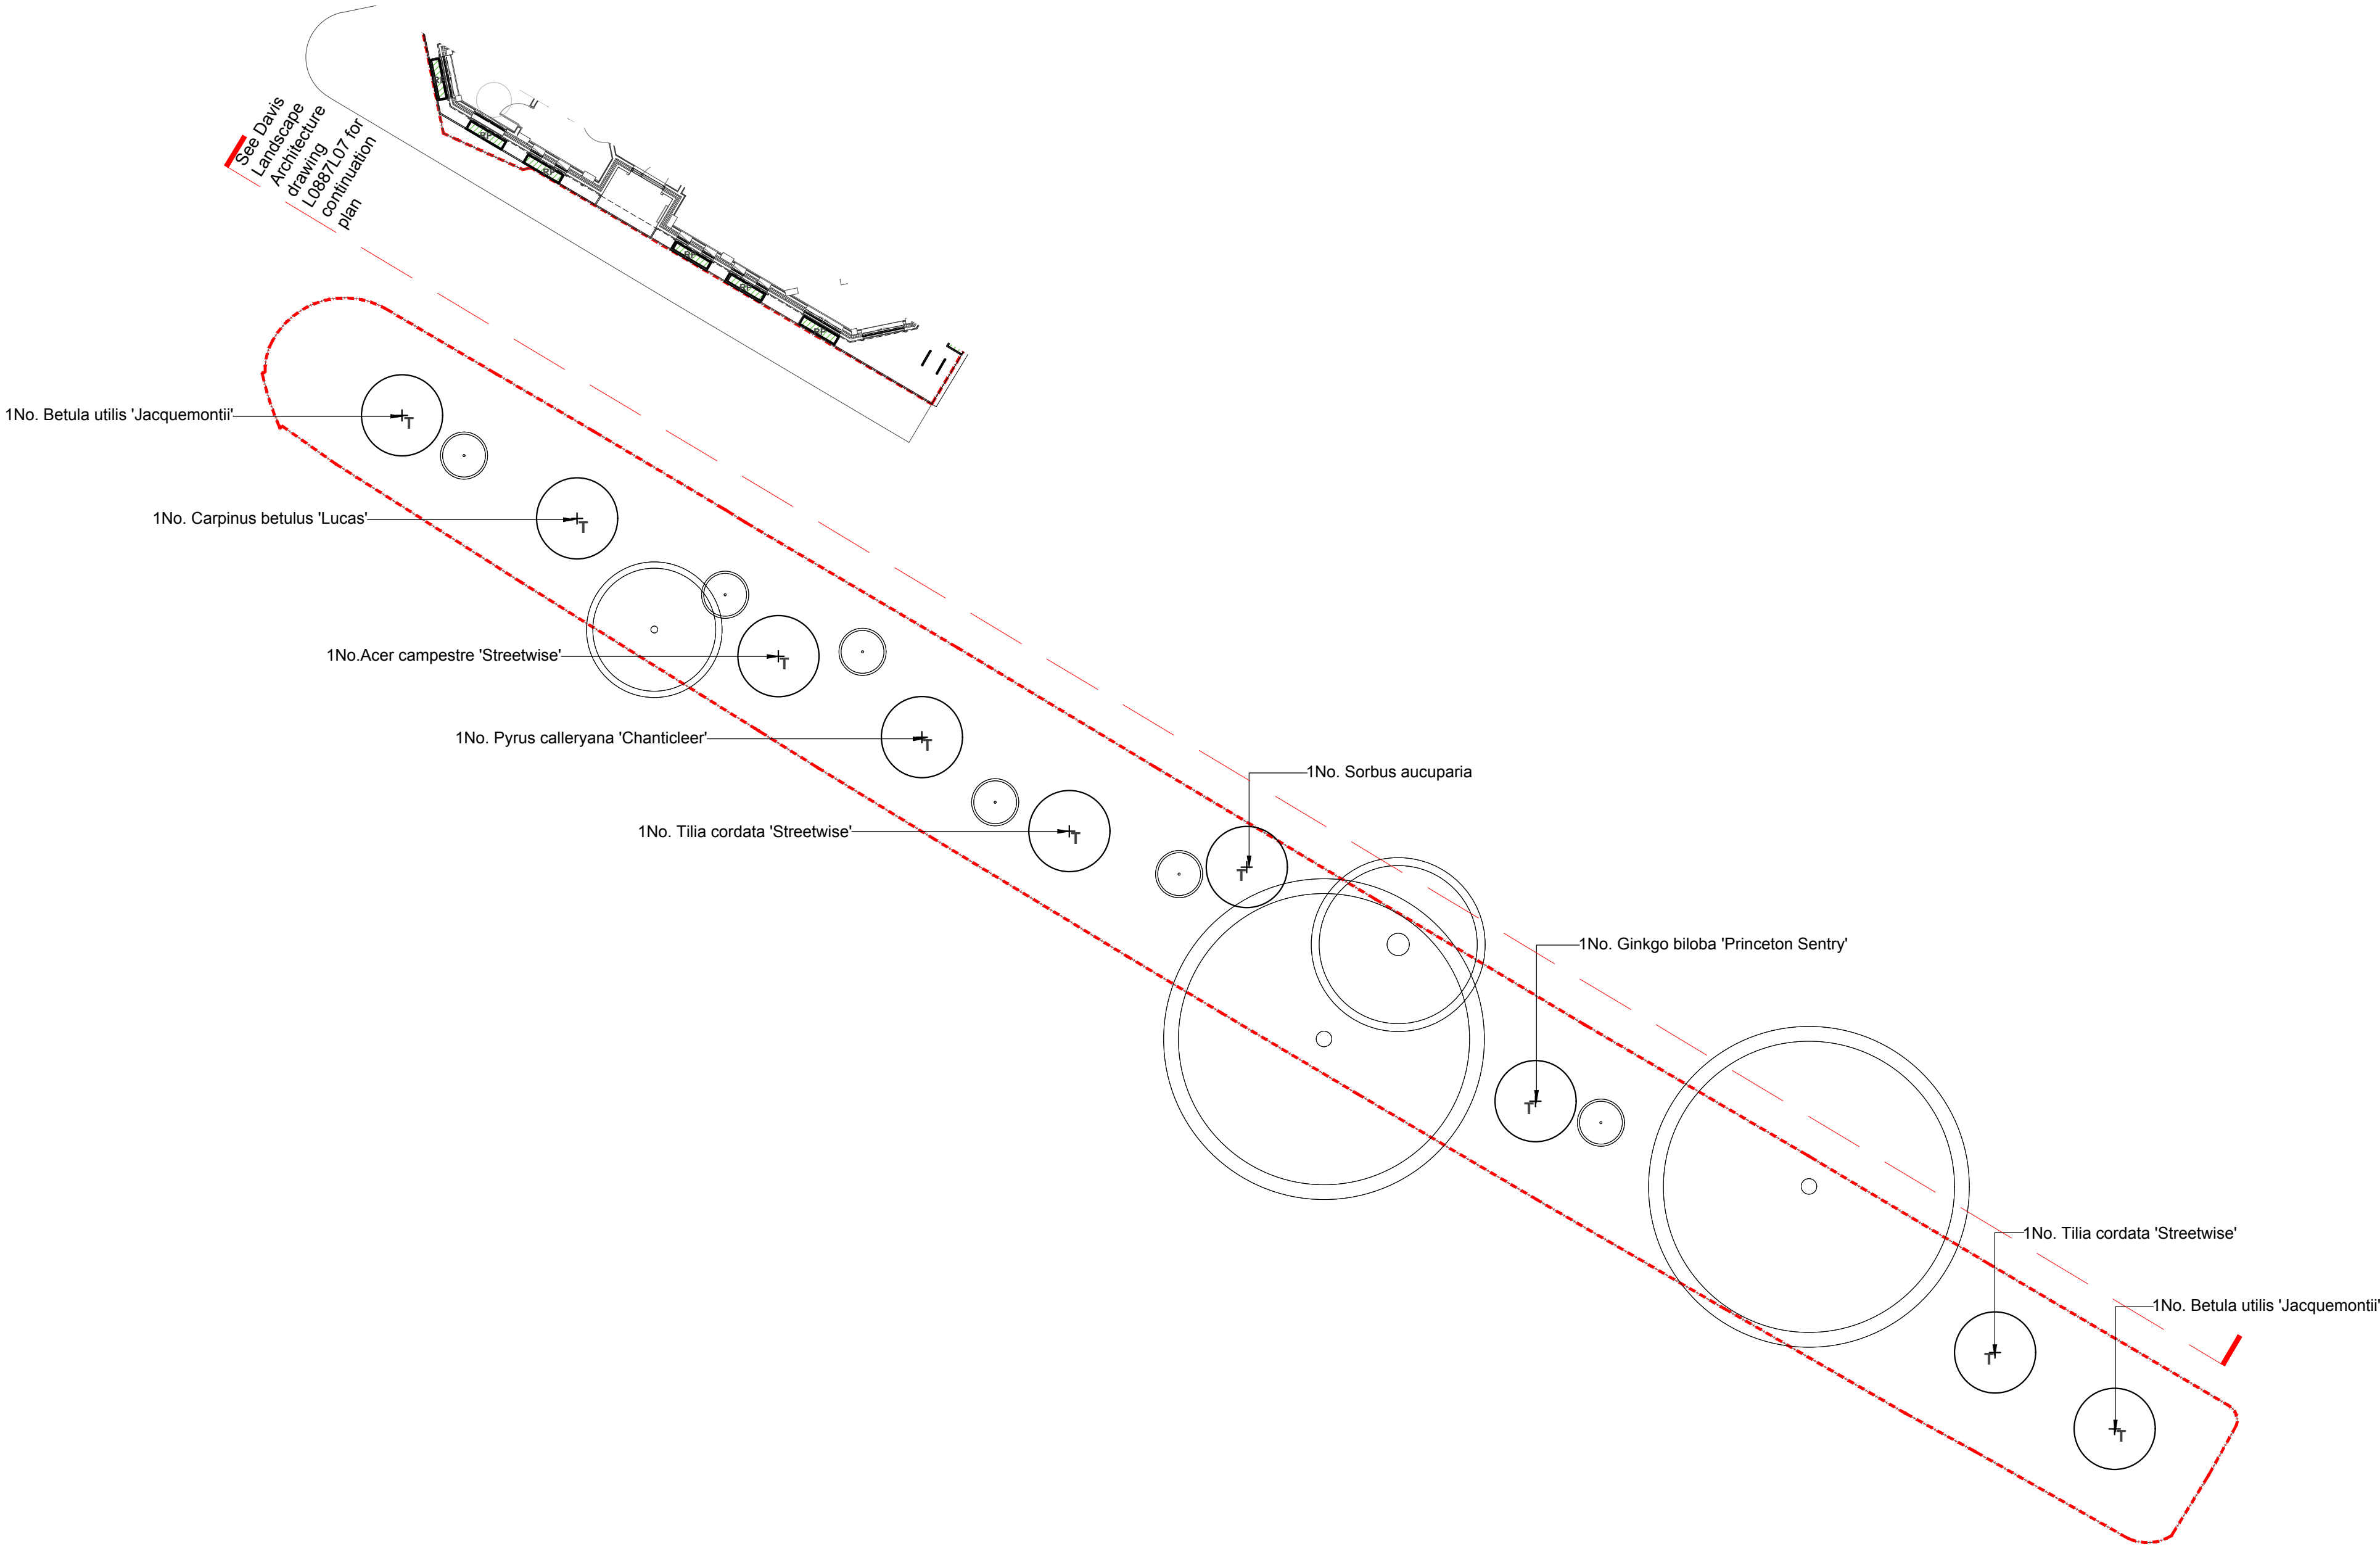

Key:


Planning Boundary

Existing trees

Proposed trees.
Refer planting schedule for tree species.

All the planting and trees should be sourced from reputable UK suppliers.

- NOTES:
1. This drawing is to be read in conjunction with all relevant contract documentation from the design team, with any conflicting information to be brought to the attention of Davis Landscape Ltd in writing before commencing on site.
 2. The contractor is to check and verify all levels and dimensions before construction. Any discrepancies are to be brought to the attention of Davis Landscape Ltd in writing before commencing on site.
 3. All dimensions in mm, unless otherwise stated.
 4. Do not scale from this drawing.
 5. All sub base and concrete specification, fixings, brackets & the like to Engineers' details & specification.
 6. We are not liable for the detailed design of above ground drainage, ground drainage, sub-bases, foundations, retaining structures, fall from height barriers and building waterproofing details.
 7. All proprietary products shall be installed in accordance with manufacturers written instructions.
 8. Submit Shop drawings for Davis Landscape Ltd approval before constructing any bespoke landscape item.



FOR TENDER

Rev	Description	Date	By
-	-	-	-

Davis

Landscape Architecture

15 Iliffe Yard, London, SE17 3QA

020 7277 1035

mail@davisla.com | www.davisla.com

Client

Formation Design & Build

Job Title

Partridge Way

Drawing Title

Median Tree Planting

Scale : 1:200@A1

Drawn : BA

Date : 01.06.23

Checked : JD

Drawing No. : L0887L06

Rev. : -

Trees

Name	Form	Age	Girth (cm)	Height (cm)	Clear stem (cm)	Root cdn.	Habit	Spacing	No.
Acer campestre 'Streetwise'	Standard (selected)	3x	10-12	300-350	min 200	RB	-	as shown	1
Betula utilis 'Jacquemontii'	Standard (semi mature)	4x	20-25	min 450	min 200	RB	-	as shown	2
Carpinus betulus 'Lucas'	Standard (extra heavy)	3x	18-20	min 450	min 200	RB	-	as shown	1
Ginkgo biloba 'Princeton Sentry'	Standard (semi mature)	4x	25-30	min 450	min 200	RB	-	as shown	1
Pyrus calleryana 'Chanticleer'	Standard (extra heavy)	3x	16-18	min 450	min 200	RB	-	as shown	1
Sorbus aucuparia	Standard (extra heavy)	3x	16-18	min 450	min 200	RB	-	as shown	1
Tilia cordata 'Streetwise'	Standard (extra heavy)	3x	18-20	min 450	min 200	RB	-	as shown	2