



- KEY:**
- Ownership Site Boundary Line
 - Application Boundary Line
 - Existing College Buildings on Campus
 - Proposed Building Boundary Line
 - Neighbouring Residential/ Business Buildings
 - Parks/ Green Areas
 - Existing Trees within Site Boundary
 - Existing Car Parking Spaces
 - Existing Sheffield Cycle Stands
 - Designed Area for new Two-tiered Sheltered Cycle Stand and additional Sheffield Cycle Stand
 - Existing Recycling and Waste Areas
 - Proposed Recycling and Waste Areas

- ENTRANCES:**
- Pedestrian Entrance
 - Vehicular Entrance
 - Secure Lines - Security gate access with card reader entrance system.

- LANDSCAPE:**
- Hard Landscaping - Proposed Permeable Paving strip around perimeter of New Construction and Engineering Centre.
 - Asphalt Finish to service yard to match existing.

Note:


- Proposed external finishes is phase 1 of the masterplan for the Tottenham Centre.
- Levels and falls of proposed external finishes to work with existing levels/ falls for drainage.
- Information to be read in conjunction with Topographical Survey.

GENERAL NOTES

This drawing is to read in conjunction with all relevant Engineer's drawings, Architect's drawings, and specifications

All dimensions are in millimetres unless noted otherwise. Drawings should not be scaled by either hand or from the computer digital data, only figured dimensions are to be used.

This drawing uses colour, colours are indicative, not actual finish.

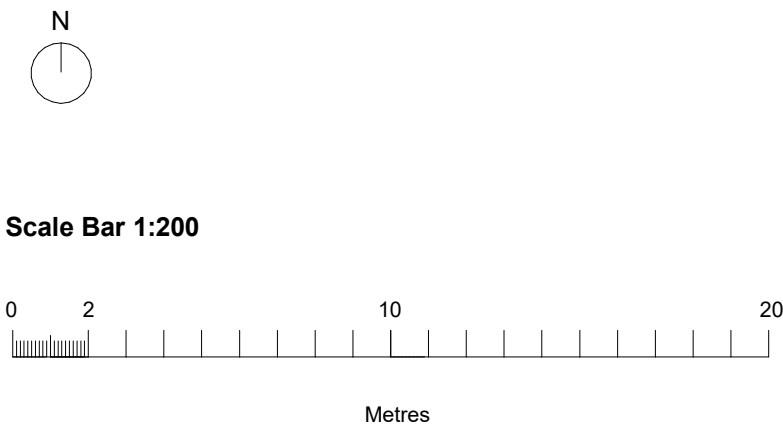

SAFETY, HEALTH AND ENVIRONMENTAL INFORMATION					
In addition to the hazards/risks normally associated with the types of work detailed on this drawing, note the following:					
CONSTRUCTION					
-Working at height for works at high internal levels. -Working with plant & machinery, risk of collision or electrocution.					
MAINTENANCE/CLEANING					
-Working at height for installation of high level construction and proposed finishes. -Working in confined spaces or voids, for servicing of any mechanical/electrical services -Glass cleaning is envisaged to be via poles from ground level -Glass replacement will be via a mobile platform					
DECOMMISSIONING/DEMOLITION					
-Demolition works associated with removal of existing building walls and construction of new internal walls, risk of collapse. -Working at height for works at high levels. -Risk associated with the stripping of existing services.					
It is assumed that all works will be carried out by a competent contractor working, where appropriate, to an approved method statement					
Rev.	Date	Description	By	Chk'd	App'd

P1	01/02/2024	FOR PLANNING	LT	LO	JR
Rev.	Date	Description	By	Chk'd	App'd

Drawing Suitability

Approved & Accepted as Stage 3a

Status

A3

AtkinsRéalis

Nova North
11 Bressenden Pl
Westminster
London
SW1E 5BY
Tel: +44 20 7121 2000
www.atkinsrealis.com
© SNC-Lavalin (2019)

Client

Capital City College Group

211 Gray's Inn Road
King's Cross
London, WC1X 8RA
www.capitalccg.ac.uk

Project Title					
CCCG Tottenham Construction and Engineering Centre					
Drawing Title					
PROPOSED EXTERNAL FINISHES PLAN					
Scale	Designed	Drawn	Checked	Authorised	
1 : 200	LO	LO	JR	JR	
Original Size	Date	Date	Date	Date	
A1	JR	JR	JR	JR	
Drawing Number				Revision	
5219901-ATK-01-00-D-A-021004				P1	