

26th January 2026

Downshills Park Playzone

Macadam Playzone Proposed Materials

Example photos



Macadam surface specification:

C/5B | 1 (0.9 t.a.) |

AGGREGATE INDUSTRIES

Asphalt

Supersport®

BES 6001
Responsible Sourcing
www.aggregateindustries.co.uk

CERTIFIED

CERTIFIED

CERTIFIED

CERTIFIED

Supersport® is a range of asphalt products designed to meet job specific requirements and offer a range of benefits for tennis courts and Multi Use Games Areas (MUGAS). A selection of binders are used, these include both normal penetration grades, polymer modified grades and our 'Plus' binder, to provide job specific requirements and benefits. Supersport® can also be produced as a coloured product.

Supersport range

Supersport Tennis
 Supersport Tennis is a fast draining material that is designed to meet the stringent demands of this sport. It is fully compliant with the requirements of the Lawn Tennis Association and SAPCA, and is available with our 'Plus' binder that allows for increased workability.

Supersport MUGA
 Supersport MUGA is the ideal product for Multi Use Games Areas where a variety of activities including basketball, hockey, football and netball are played. Again this product is available with the 'Plus' enhancement if required. It is fully compliant with the requirements of SAPCA.

Supersport binder course
 Supersport binder course materials are available in 10, 14 and 20mm aggregate sizes, enabling the contractor to select the material best suited to their application. These are the recommended binder course materials for our Supersport surface course options.

Key performance properties

Supersport	Tennis court surface course	MUGA surface course	Binder course
Aggregate size	6mm	6mm	10, 14 or 20mm
Nominal layer thickness	30mm*	30mm*	40 – 80mm**
Water infiltration rate EN 12616, surfaces for sports areas (mm/hr)	~ 9800	~ 5600	~ 15,000

* When laid on an appropriate binder course
 ** Dependent on both method of construction and foundation requirements

Applications

- Tennis courts
- Multi Use Games Areas
- School playgrounds.

Colour coating specification:

BRITANNIA

DATA SHEET

DECATONE SR60

DEEP, LONG-LASTING COLOURS COMBINED WITH EXCEPTIONAL SLIP RESISTANCE

SR60 TENNIS COURT COATING

PERFORMANCE ADVANTAGES

- > Slip Resistance Value (SRV) of 60 in the wet or damp for safer play
- > Tough, long-lasting finish for macadam tennis courts
- > Slip resistant properties
- > Contains algicide and fungicide

TESTS

Slip Resistance Value (SRV)
The test procedure is described in ITF test procedure CS 02/01:1997 and BS EN 13036 Part 4 using the CEN Rubber Test Foot complies with the minimum requirements of 60 in the wet or damp.

Taber abrasion
The Wet Scrub is performed according to ISO 11998. Weight loss as measured in grams per m², coatings tested fall into Scrub Class 1.

USES

Formulated to give minimum slip on macadam and concrete tennis courts.

> For airless spray application.

Do not use on quartz or gravel containing macadam due to poor binder adhesion. Power floated concrete areas as well as chemically or mechanically hardened floors may not be suitable for coating.

COLOUR RANGE

See next page for swatches.

PACK SIZE

> Available in 20 litre drums.





SPREADING RATE

Painting may be carried out by most industrial airless equipment. Tip size of 28 thou is recommended with 45° angle. Thinning up to 10% may be required in cold conditions but best results are obtained when the coating is applied neat. Care should be taken to mask all areas not to be coated.

> Coverage 6-8 square metres per litre per coat.
Apply two coats.

DRYING TIME

Drying takes from 1-2 hours in good conditions. Avoid painting in high humidity or when rain is expected. Over coating may be undertaken when first coat is dry to touch. Curing depends on atmospheric conditions. Please refer to specialist applicator recommendations regarding play after spraying is completed.

SHELF LIFE

> Up to 12 months if stored correctly in an unopened container.
> Store above 5°C.

PREPARATION

All surfaces should be free from loose and flaking material, dirt, grease and vegetative growth. Any debris may be removed by vacuum or pressure blasting with air or water. Brushing (manual or machine) may be suitable in particularly difficult areas, ie: under trees or areas constantly in the shade. Decatone Tarmac Binder should be used to stabilise a friable, porous or aged concrete court or fretting macadam.



Example photograph of playzone:



Example Cycle Hoop



Example waste / recycling bin:

The selected mixed waste and recycling bin for Haringey's parks & green spaces is the Wybone MLB/224R/ECO/SO bin and this is used in all parks (apart from the three parks (Finsbury Park, Lordship Rec and Markfield Park) that had Heritage Lottery grants that will continue to use the Sentinel bin??)


NB: Since 2019 it has been Council policy to remove all dog waste bins from parks. Dog waste has been able to be disposed of in mixed waste bins since 2005

Bins

Wybone MLB/224R/ECO/SO

Key characteristics are:

- Dimensions: Length: 975mm, Width: 485mm, Height: 1,105mm.
- Capacity: 224 litres (2x 112ltr, one for mixed waste one for recycling, where the recycling side has a transparent face.
- Colour: Black/RAL 9005.
- Bins should be fixed to existing hardstanding or where none is available new bases are to be constructed.
- Each bin will sit on a base that is at least 100mm wider in each direction and 500mm longer in each direction.
- Bases should match the surrounding landscape materials, so for example at Ducketts Common they will be tarmac with a block trim.
- Although each bin has the options of its own built-in concrete base, each constructed base will have a concrete foundation beneath the surface material that the bin will be screwed down to. This can be under the door openings or through the built-in concrete base, and in either case needs to be flush/countersunk to enable unrestricted servicing of the bin.
- Where bases are on grass they should be splayed to enable ease and flow of maintenance vehicles to mow without need for hand-strimming, as per the example photo from Ducketts Common.
- Gold strips are provided at the (top and) bottom to enable partially sighted people and dementia sufferers to better understand what they are looking at.

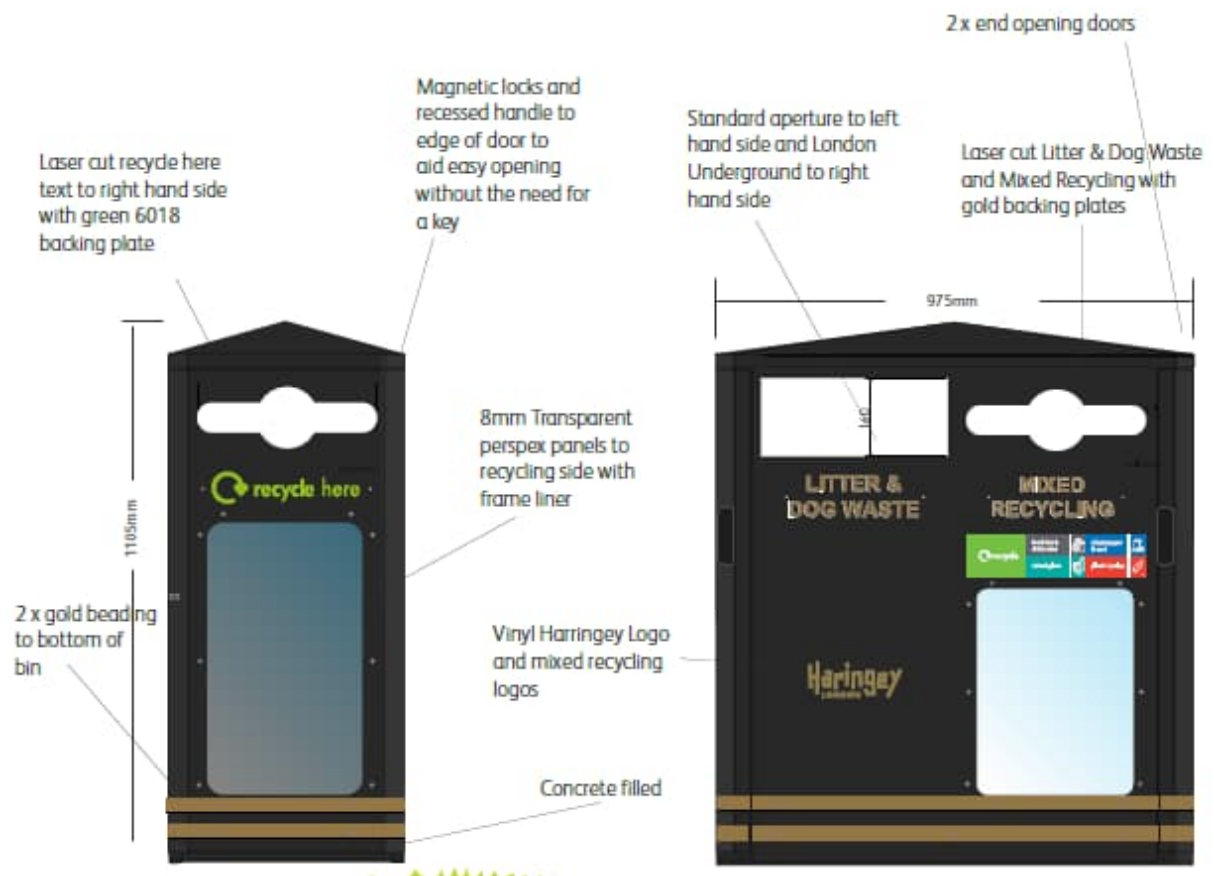

Contains 2 x L1 liners


CUSTOMER SPECIFIC ARTWORK



AW720-Mixed Recycling-Wrap colours-
85mm x 365mm

Haringey
LONDON

AW1292-London Borough of Haringey
Logo 2019-Gold-198mm x 77mm

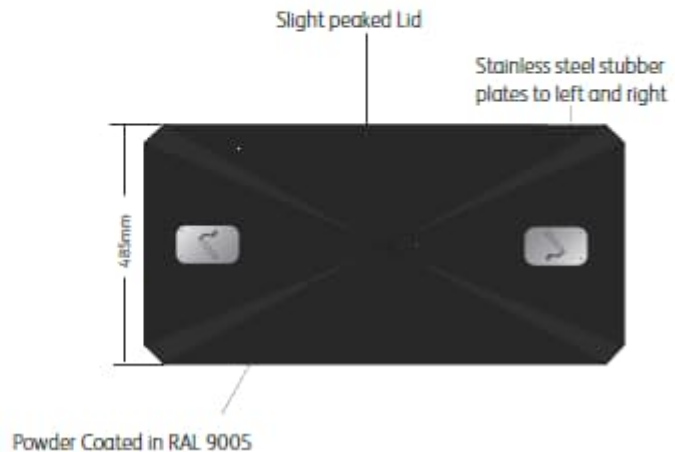

Bins shall be fixed to their bases.

Where the bins have their own internal concrete base, bins can be screwed to the new constructed base by screwing through the plate under the door, making sure of a flush finish so as not to restrict door movement.

Where bins do not have their own internal concrete base, these can be screwed anywhere on the baseplate, again ensuring no restricting to the servicing of the bin.



Fencing specification:

ZAUN

DUO 8 SPORTS

Double Wire Mesh Fencing System



Benefits

- 8mm twin horizontal wires & 6mm vertical wire
- Extra wire increases panel strength
- 50mm x 200mm mesh pattern
- Anti tamper fixings for a secure installation
- Galvanised & polyester powder coated panels & posts
- EPDM inserts for noise reduction
- Full length clamp bars for flush playing side of pitches
- Excellent rebound properties

Features

1. Polyester Powder Coated RHS Post
2. Twin Horizontal Wires
3. Full Length Clamp Bar
4. Noise Reducing Inserts
5. Security Fixings

The Duo 8 Sports double wire sports fencing system has been designed and evolved from the Duo8 perimeter fencing system. Perfect for both light or heavy usage courts and pitches with MUGAs (multi use games areas), the Duo 8 Sports fencing system is ideal for use in urban or rural settings.

The Duo 8 Sports fencing system is manufactured from dual horizontal 8mm wires sandwiching single 6mm vertical wires. This produces a 50mm x 200mm mesh pattern that is not only strong and vandal resistant but also offers the best value.

One of the major stumbling blocks during the planning of sports courts is noise that occurs during play. Duo Sports has been developed to overcome the rattle that so many residents object to. The lower 1.2m high impact zones of the sports fencing features fixings every 200mm. This ensures there is minimum movement between the panel and the post. Furthermore, each fixing uses a synthetic EPDM insert to insulate the panel from the post and proven to reduce noise by circa 29%.

Duo 8 Sports is a highly rigid panel system, providing strength to the fence even when under stress from people, balls or sports equipment making it the perfect MUGA Fencing System.

Available in a wide range of RAL colours which can match your organisation, club or team colours.


Example recess goal ends:



Floodlighting columns:

WYDELS
ELECTRICAL WHOLESALERS

8 METRE ROOT MOUNT & FLANGE PLATE COLUMN DRAWING

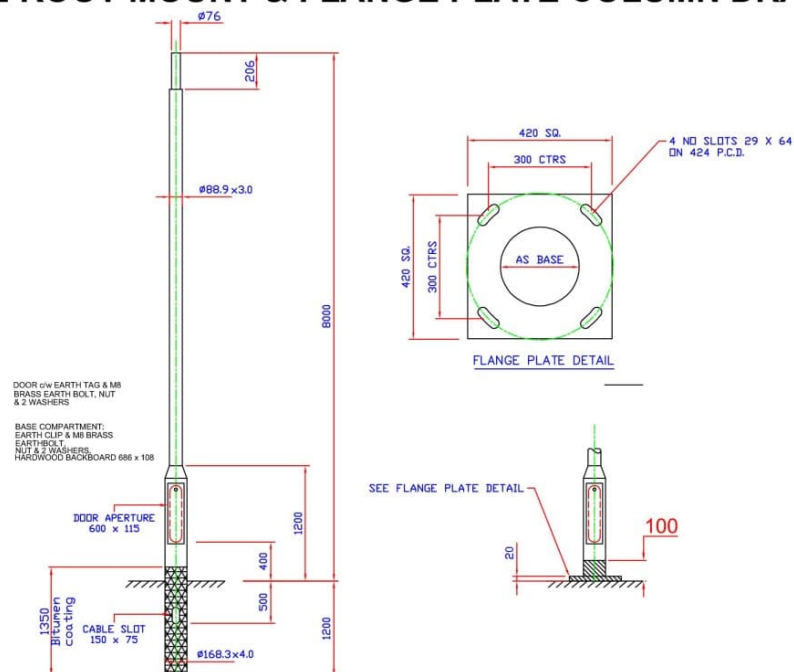


Floodlighting details:

OUTDOOR

Regor 11 Sport



The ultimate LED solution for traditional SON and metal halide floodlight fixtures, providing optimum light levels. This highly efficient LED floodlight is the perfect solution for a variety of sporting applications. Whether illuminating a rugby pitch, football pitch, tennis facility, a track and field stadium, or other sporting arena, our floodlight system is capable of delivering high-quality lighting that enhances the playing experience for athletes and spectators alike.

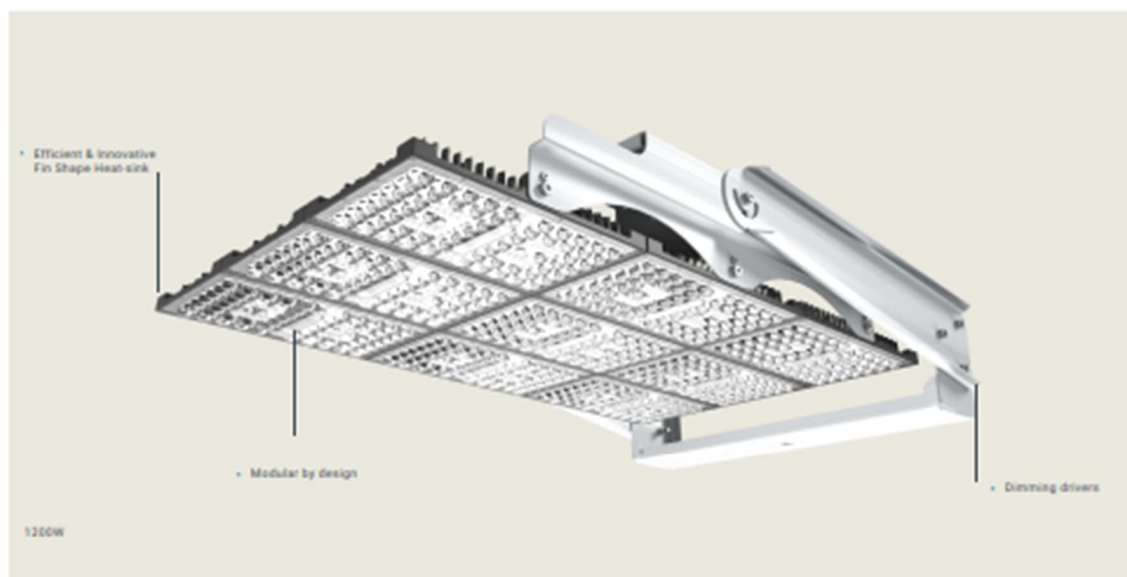

Features

- IP65
- Range of outputs available
- Efficient to 140-160 Lm/W
- High mast asymmetric lens
- Front and rear visor options available
- For light spill control
- Universal under-hang and top mount bracket
- Lightweight Inventronics driver


Applications

- Car Park
- External
- High Mast
- Leisure


Options and Accessories

- 27K 2700K Colour Temperature
- 3K 3000K Colour Temperature
- 5K 5000K Colour Temperature
- 65K 6500K Colour Temperature
- 415V Split Phase Driver
- C90 CRI90 LEDs
- RD Remote driver option - cable assembly to custom length to suit any application
- DD SwitchDIM/DALI
- WL Wireless Control

Photometric




Dimensions

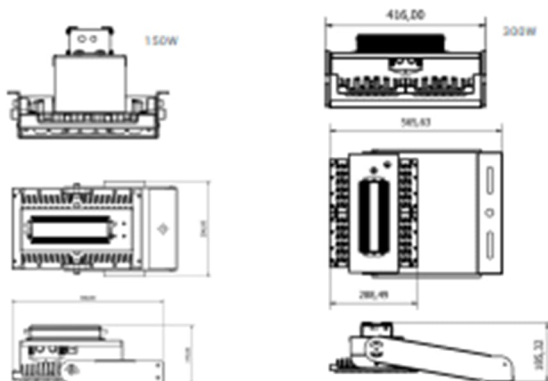

IN KEEPING WITH POWERLITE FITZGERALD'S POLICY OF CONTINUED DEVELOPMENT, WE RESERVE THE RIGHT TO CHANGE SPECIFICATIONS WITHOUT NOTICE. THE INFORMATION CONTAINED IN THIS DATA SHEET DOES NOT FORM PART OF ANY CONTRACT.


Key Features

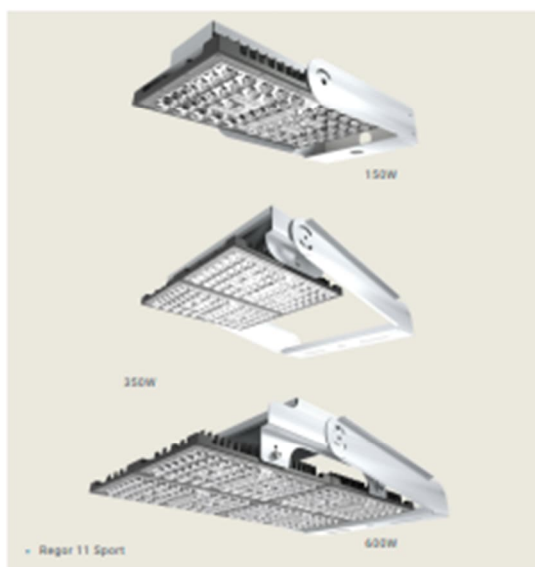

Technical Details

Part No.	Description	Weight (kg)	Windage (m2) when flat mounted	Power (W)	Luminaire Lumens	LI/cW
R11L100-SPORT-4K	Sports Floodlight	2.5	0.0625	101	15,529	153.8
R11L150-SPORT-4K	Sports Floodlight	2.5	0.0625	155	22,618	145.9
R11L300-SPORT-4K	Sports Floodlight	7.6	0.125	308	43,736	142.0
R11L450-SPORT-4K	Sports Floodlight	14.8	0.125	462	68,400	148.1
R11L600-SPORT-4K	Sports Floodlight	14.8	0.125	617	87,610	142.0
R11L950-SPORT-4K	Sports Floodlight	19.5	0.15	995	140,300	141.0
R11L1200-SPORT-REM-4K	Sports Floodlight Remote Driver as standard	27.0	0.15	1196	174,600	145.9

Dimensions Cont

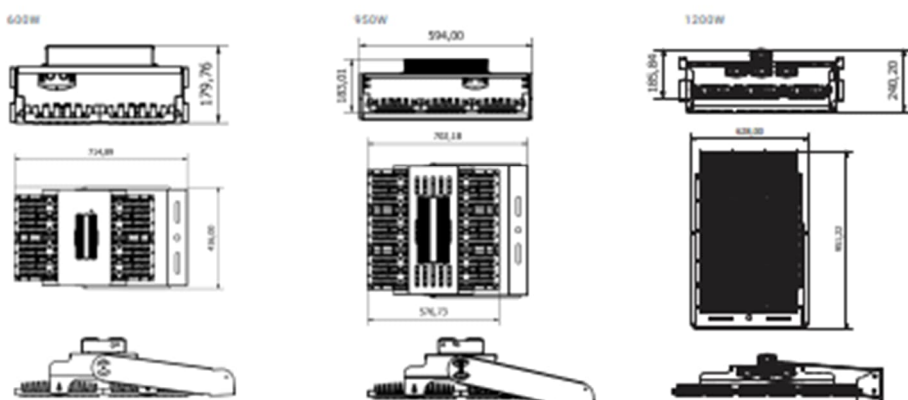

Clubspark/CIA controlled access gate:



SmartAccess

★★★ premium

For the larger multi-pitch venue, with higher footfall, Premium is the ultimate all-in-one booking, access and lighting solution.

ENTRY

Each venue has a controller that connects to the internet via 4G or WiFi. Players book and pay for a timeslot online, via the ClubSpark booking platform, and receive an access code. ClubSpark then updates the controller, in real time, with the booking information. When the player arrives for their session, they enter the access code into the gate's keypad to gain access. Inputting an incorrect access code results in entry being denied.



CONTROLLER

The controller also monitors the health of the system, continuously feeding information back to ClubSpark. This controller can also connect to all kinds of third-party devices to manage automation and on-site access.

LIGHTING

Floodlighting can be configured to turn on when the venues are in use, allowing for different warm-up and



cool-down periods. Lighting can be set to automatically turn on when a player accesses the gate at the start of their booked slot. Floodlights can be set to turn on prior to a booking and stay on for any concurrent bookings.

HYGIENE

We can also offer an anti-microbial coating. Preventing the transfer of bacteria and viruses from door handles, finger plates and pull handles is just one way to help protect staff in their working environment.



Bench specification:

Broxap Eastgate 'Anti Vandal' seat with black RAL9005 galvanised mild steel slats



Featuring nine galvanised mild steel slats, the Eastgate 'Anti-Vandal' Cast Iron Seat combines comfort and durability, making it a robust seating solution designed to deter vandalism in high-footfall outdoor spaces.

Storage container sited within storage area specification:




Data Sheet | Model:

Armorgard TuffBank™ TBC4

- 🔒 Our most popular range of secure tool vaults - excellent value-for-money.
- 🔒 Sold Secure and Secured by Design accreditation: Our TuffBanks adhere to rigorous test standards required by the police.
- 🔒 Robust, 5-lever deadlocks with extra reinforced protection.
- 🔒 Unique internal anti-jemmy system prevents the lid being forced open.
- 🔒 Multiple external anti-jemmy plates.
- 🔒 Robust construction using 2 and 3mm steel.
- 🔒 Hydraulic gas arms assist with the lid opening.
- 🔒 Unique SlamStop system prevents the lid closing unexpectedly.
- 🔒 Cable pass-through for secure tool charging.
- 🔒 Ergonomically designed recessed handles.
- 🔒 Forklift skids for easy transportation.
- 🔒 Robust castors and crane lifting eyes are available as optional extras to simplify transportation.
- 🔒 Use the optional storage shelf or our unique PowerShelf to organise and charge your tools.

Product	Armorgard TuffBank™ TBC4
Internal dimensions	1120x590x1175mm
External dimensions (including protrusions)	1150x615x1265mm
Weight (kg)	125
Colour	Charcoal grey: RAL7021, Pillar box red: RAL 3020
Finished Coating	Powder coated steel
Material	Steel
Material Thickness	2mm & 3mm
Locking mechanism	2x Highly secure, keyed-alike 5-lever deadlocks
Does it have Forklift Skids?	Yes
Does it have Gas Arms?	Yes
Newton Loading of Gas Arms	2x 1000N
Safety stay	SlamStop™
Quantity of keys supplied	3 keys
Optional Extras Available	Crane lifting eyes, castors, storage shelf or PowerShelf
Quantity of Shelves as standard	None
Are Castors standard or optional extra	Optional
How are the Castors fitted?	Castor plates
Sump capacity	N/A
Safety Signage	N/A
Fire resistant?	N/A

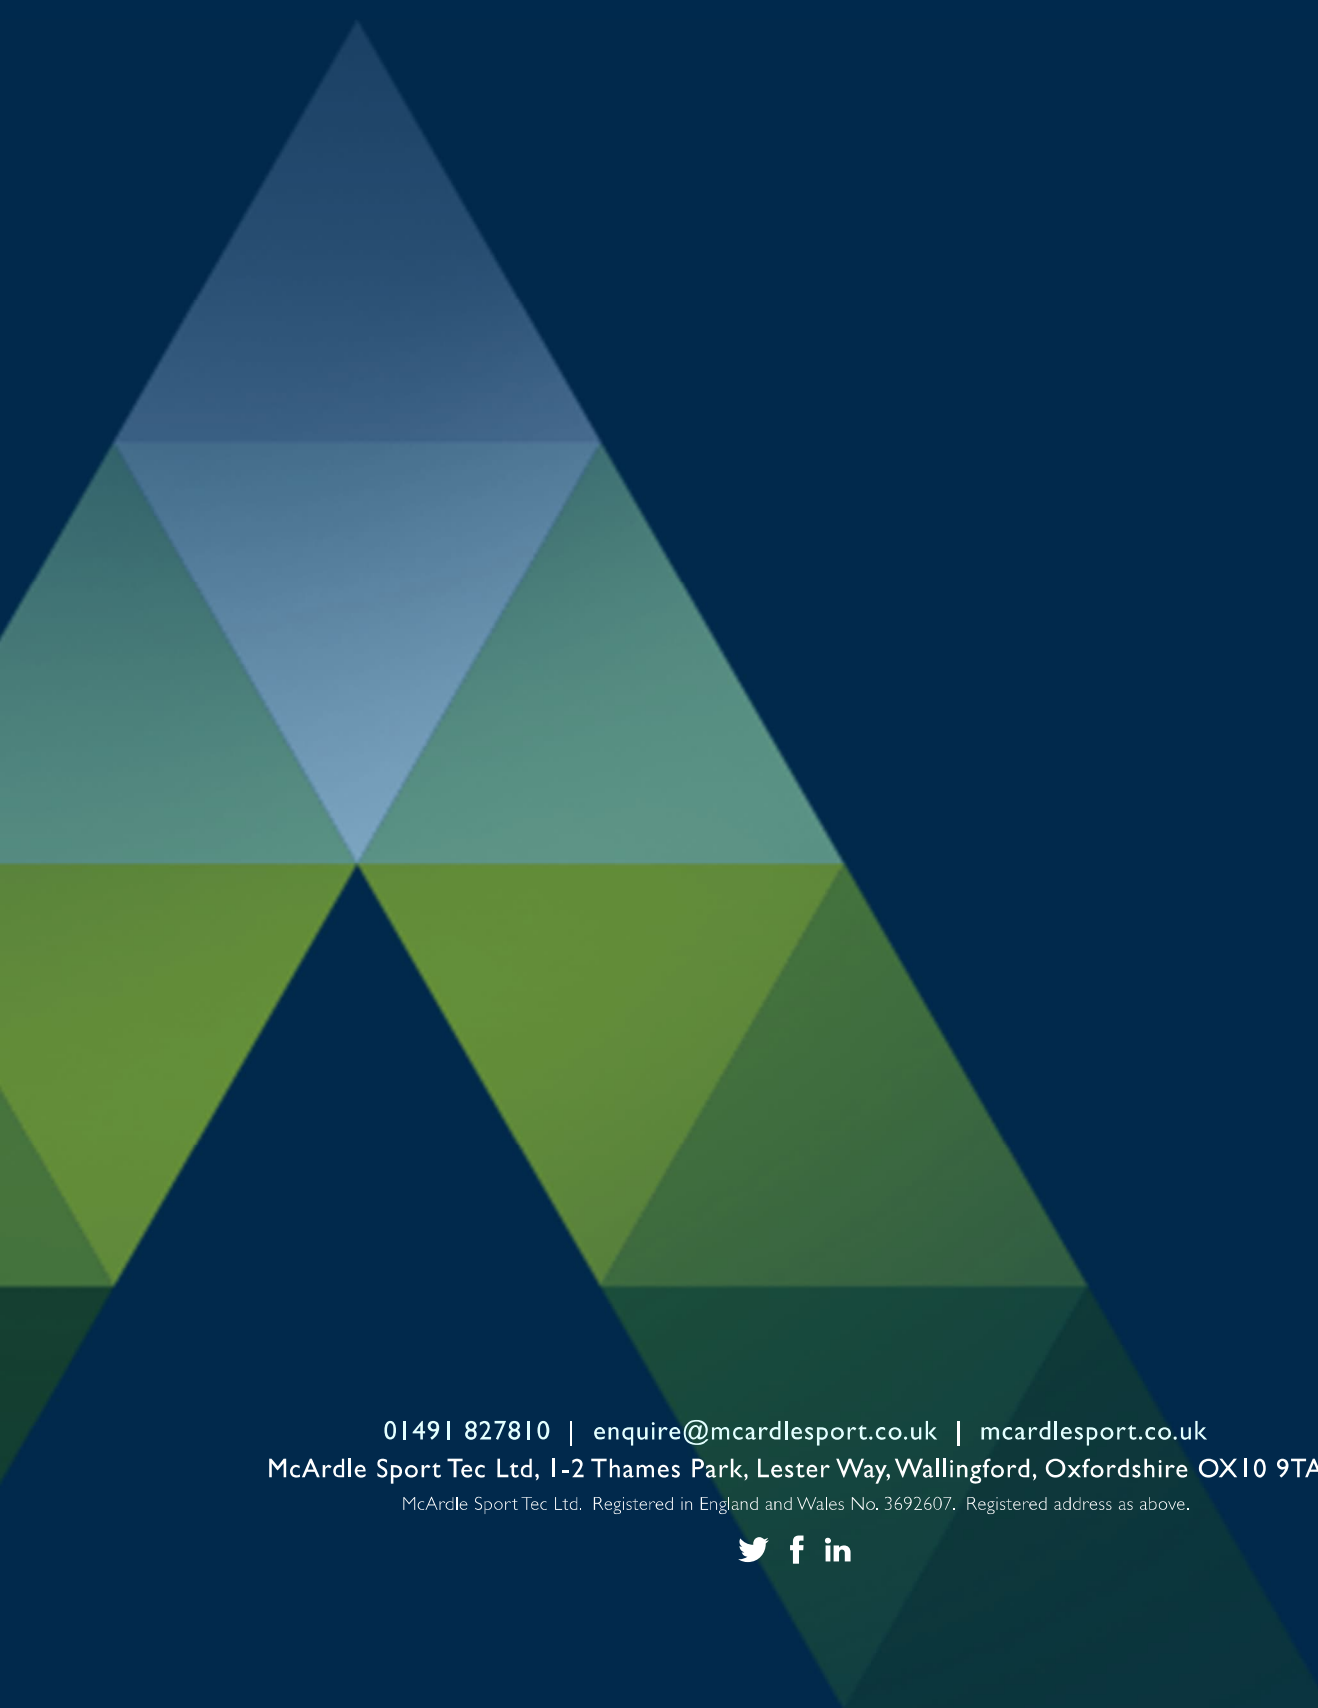

01491 827810 | enquire@mcardsport.co.uk | mcardsport.co.uk
McArdle Sport Tec Ltd, 1-2 Thames Park, Lester Way, Wallingford, Oxfordshire OX10 9TA
McArdle Sport Tec Ltd. Registered in England and Wales No. 3692607. Registered address as above.

