New gable: original bricks salvaged and reuse

The triangular brickwork beneath the proposed new gable roof will be constructed using original yellow London stock bricks carefully salvaged from the existing building during the works.

The connection between existing wall and new roof will be separated by a line of London red brick stock reflecting the transition of 12 Tancred Road




Hip to gable wall transition 12 Tancred Road, N4

Existing Victorian brickwork — retained

Existing original yellow London stock brickwork to the principal existing south elevation to be retained in situ and conserved.


Aluminium standing-seam roof

Charcoal grey prefinished aluminium standing-seam roofing, matt finish, with narrow regularly spaced seams. All visible flashings, trims and associated metalwork to match. Dark recessive finish selected to provide a restrained contemporary contrast with the original yellow London stock brickwork.

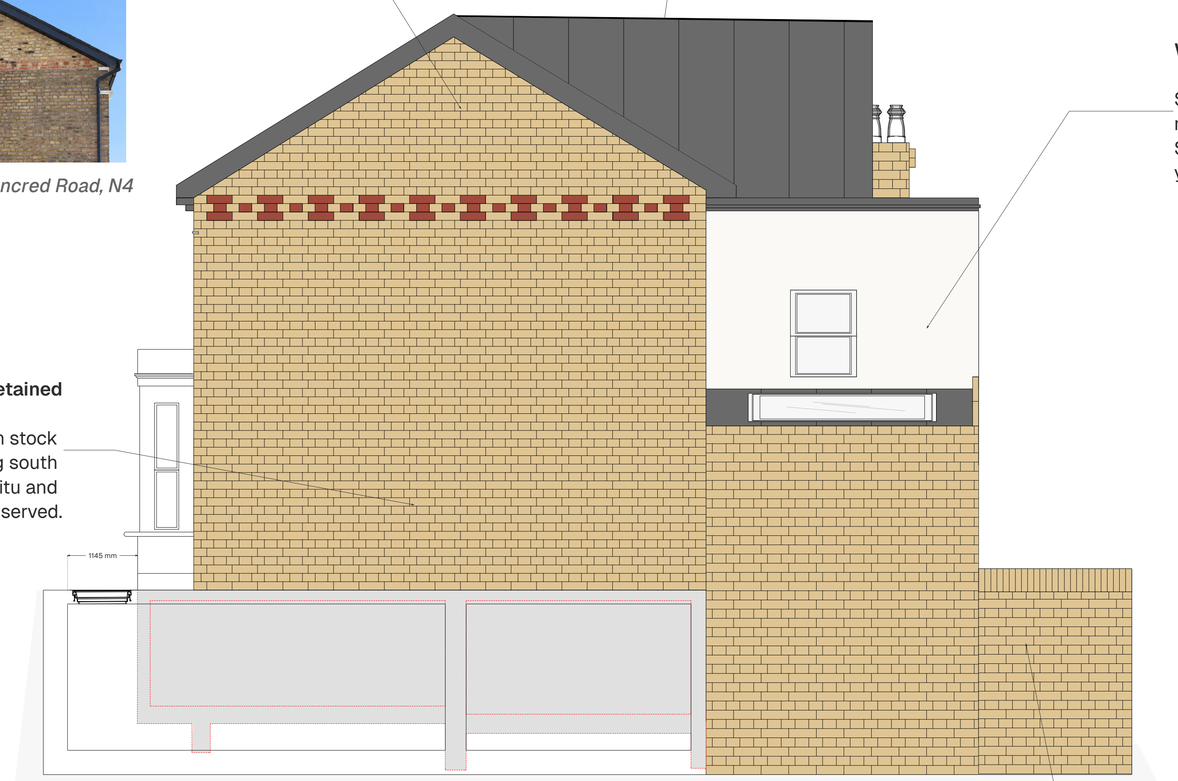

White/ neutral render

Smooth mineral-based off-white render, matt finish, in a warm light-stone tone. Selected to complement the original yellow London stock brickwork.

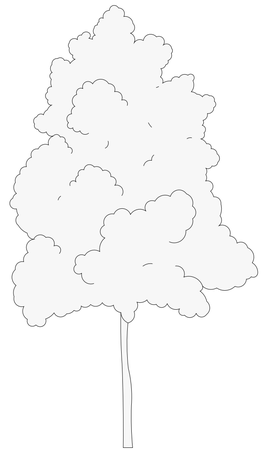

Extension: sympathetic new London stock brick slips

New brickwork slips to the extension will use a high-quality yellow London stock facing brick selected to closely complement the original c.1880 brickwork in colour, tonal variation, texture, dimensions and character.

0 1 2.5 5m

Revisions

Rev	Date	By	Description	Approved
1	06.09.26	NF	Materials S Elevation	CR/NR

This drawing is produced for the purposes stated below. Do not scale from this drawing, use figured dimensions only. Drawing to be read in conjunction with all other Architect's and Consultants' drawings and specifications. This drawing is copyright.

Notes

Client: Naomi Ross & Chris Ross

Project: 2 Tancred Road

Sheet: 2TR-205-Proposed South Elevation

Date of Origin	Project Number	Scale (A1)
Issue Date	001	1 : 50

Drawn By	Suitability	Dwg Status
FR	S1 For Coordination S2 For Stage Approval S3 For Review and Comment S4 For Review and Authorisation S5 For Review and Acceptance S6 For Review and Approval of Variation S7 Fully Signed off S8 Partially Signed off	

Drawing Number

Project	Originator	Code	Level	Type	Discipline	Number	Revision
001	FR	DR	ZZ	DR	A	2002	1