

Atra

Surface mounted wall mounted LED luminaire suitable for outdoor locations.



Low output optics



High output optics



Side view

Overview

Atra is a high-performance surface-mounted fitting designed for outdoor environments where efficiency and precision matter. Featuring two optic options and a broad range of lumen outputs, Atra delivers versatile lighting solutions for multiple applications, reducing the number of fittings needed without compromising light quality.

Crafted from durable aluminum and finished with a coastal-grade protective coating, Atra combines superior technical performance with sleek, modern aesthetics. Compatible with Organic Response® smart controls and Outdoor PIR sensors, enabling intelligent, responsive lighting management. Engineered with a zero upward light design, Atra supports compliance with environmental standards, helping to minimize light pollution.

Optics

Precision-engineered optics that direct light exactly where it's needed — eliminating upward light, reducing light pollution, and maximizing design efficiency.

Available distribution:

- Path - for maximum spacing in between the light fittings
- Area - High performance optics to cover wide areas

Color temperature:

- 4000K
- 2700K

Light output options: 600lm - 3000lm
Emergency Output:

- 4000K Path optics - 350lm
- 4000K Area optics - 340lm
- 2700K Path optics - 320lm
- 2700K Area optics - 310lm

Construction

Thoughtfully engineered for the user experience, offering robust durability, simple installation, and effortless maintenance.


- Aluminum housing
- Electrostatic powder coating, resistant to UV rays
- Suitable for costal applications - C5 environment
- Jet Black RAL9005 finish*
- IP65
- Impact resistance: IK07
- DALI driver
- Controls options
 - Whitecroft Sense
 - Organic Response®

* Other finishes available on request. Please contact Whitecroft for more information

LED Performance

Colour Temp	RA (CRI)	Colour consistency
4000K	>Ra80	MacAdam 3 SDCM
2700K	>Ra80	MacAdam 3 SDCM

Dimensions

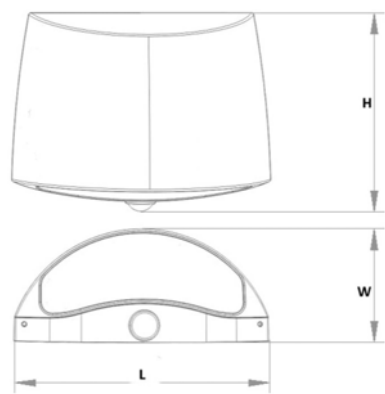

VERSION	L	W	H
All	320	140	240

To Specify

High-performance surface-mounted fitting designed for outdoor environments where efficiency and precision matter. Features a durable coating suitable for C5 corrosion-class environments. Available with designated path-optics or area-optics distributions.

- As Whitecroft Ligting ATRA